

DATA
SHEETQR: Use your camera or bar
code scanner and download
the digital PDF version

WILDFIRE


WICK® 250

PORTABLE THREE-STAGE HIGH-PRESSURE FIRE PUMP

- | For Emergency Rescue Equipment used by forestry and other emergency services.
- | Lightweight, very stable, economical and high performance are the hallmarks of the WICK® 250.
- | Best performance of all fire pumps in its class.
- | 8 HP, 2-stroke engine coupled to a three-stage foam-compatible pump.
- | Electronic over-speed protection cut-out switch.
- | See chart for available fuel connection models.
- | Overall design for exceptional ease in maintenance.
- | Optional U.S.D.A. (United States Department of Agriculture) approved spark arrestor.
- | Optional transportable back pack



Performance standard correction as per SAE J1349; 60° F / 15.5° C; Baro 29.92 in. / 101.3 mB

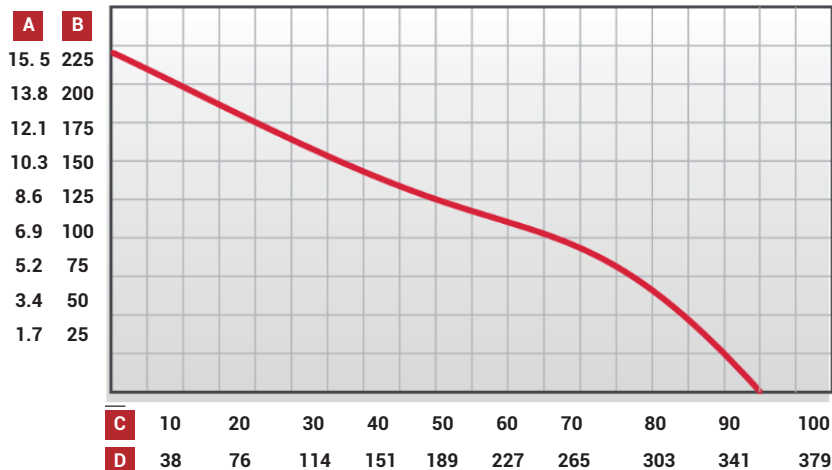

E	F
520	158
462	141
404	123
346	106
289	88
231	70
173	53
115	35
58	18

WEIGHT & DIMENSIONS		
Length	15.3"	39 cm
Width	13.0"	33 cm
Height	12.5"	31.8 cm
Weight (Dry)	31 lbs	14.1 kg
Suction	2.0"	50 mm NPSH
Discharge	1 1/2"	38 mm NPSH

ENGINE	
Hydro-Wick series	2-strokes; 134 cc;
Power	8 HP
Ignition	Electronic breakerless
Fuel Mixture	24:1
Specifications can be subject to change without notice	

A Pressure in Bar B Pressure in PSI C Flow U.S. GPM D Flow liters / Min. E Head Press. Feet F Head Press. Meters

WWW.INFOREST.COM.AR
ventas@inforest.com.ar
comex@inforest.com.ar

WICK® 250

DETAILS

BID SPECIFICATION

- | WICK® • The portable fire pump must have an 8 HP 250 2-stroke engine.
- | The engine must be coupled to a three-stage foam-compatible pump end.
- | It must be equipped with an electronic over-speed protection cut-out switch.
- | The weight shall not exceed 31 lbs / 14.1 kg
- | The pump must have a detachable rewind starter for emergency rope start.
- | The fuel connection must be available with Chrysler, Mercury or SAE-style quick connect.
- | When requested, the pump must be equipped with a USDA-approved spark arrestor.
- | The pump must be available with a transportable back pack.
- | The pump must have minimum flow and pressures as shown in the performance chart.

WICK® 250

Part#	Description
71WICK250-AC	WICK® 250 Fire Pump - Chrysler connection
71WICK250-MAC	WICK® 250 Fire Pump - Mercury connection
71WICK250-MAQC	WICK® 250 Fire Pump - Mercury connection (low tone muffler model)
71WICK250-SAEAC	WICK® 250 Fire Pump - SAE connection - c/w Spark Arrestor



OPTIONAL

Part#		Description
A	71W25-HPACK	Back board for carrying
B1	70FLPFT5	Fuel Tank .. 6.6 US Gal. / 25 Liters
C1	70FLPFL-M	Mercury fuel line
C2	70FLPFL	Chrysler fuel line
C3	70FLPFL-GSA	GSA / SAE fuel line
D1	70FLHPPQC	Hand Primer QC
D2	70FLHPPPS	Hand Primer NPSH
D2	70FLHPPNH	Hand Primer NH
E	70FL15TPPS	Thread protector 1 1/2" / 38 mm
E	70FL20TPPS	Thread protector 2" / 51 mm
E	6124NM24PF	Adaptor .. 1 1/2" / 38 mm NH Male x 1 1/2" / 38 mm NPSH Female
F	71W37-SPKARR	Spark Arrestor
G	70FL20DLPS10	Draftlite HP suction hose .. 2"/51 mm x 10'/3M c/w NPSH
H	70FLFV2PF	Foot Valve / Strainer 2"/51 mm NPSH Female