


WEIGHT AND DIMENSIONS		
Length	14.0"	36 cm
Width	11.0"	28 cm
Height	11.75"	30 cm
Weight	17.5 lbs	7,9 kg
Suction	1.5" NPSH	38 mm
Discharge	1.5" NPSH	38 mm



Performance standard correction according to SAE J1349:
60°F / 15.5°C; Baro 29.92 inHg / 101.3 mb

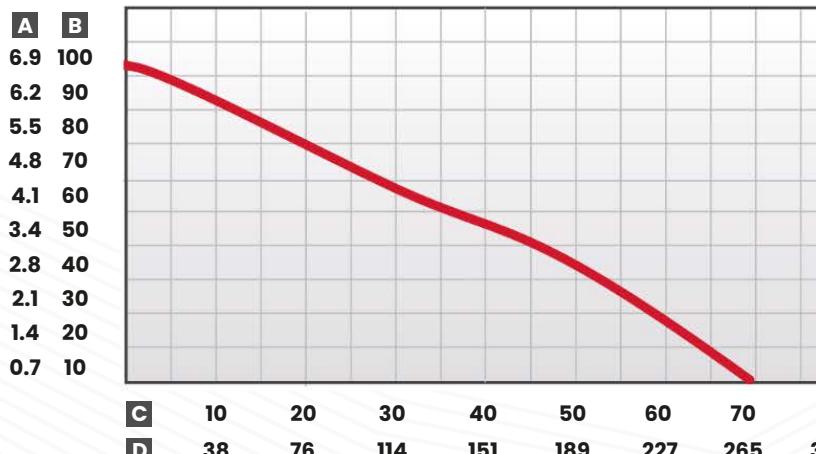

E	F
231	70
208	63
185	56
162	49
139	42
115	35
92	28
69	21
46	14
23	7

Wick 100 4M Motor Pump

Single-stage centrifugal pump, 4-stroke engine

USES:

- 4-stroke pump with multiple mounting positions. Honda GX50 engine.
- Mounted on a rear panel-style transport base with a short handle.
- Integrated fuel tank.
- Centrifugal clutch.
- Available in vertical discharge version and also with optional manual primer mounted.
- Complies with emission regulations established by the EPA / CARB agencies in the United States.

ENGINE		
Model: Honda GX50		Type: 4-stroke; 48 cc; 2.0* HP @ 7000 rpm
Clutch		Centrifugal
Fuel tank capacity	0.67 Qt. US	0.63 L
Oil capacity	0.14 Qt US	0.13 L

*Production engines may vary from this value.
Specifications are subject to change without notice.



TECHNICAL SPECIFICATIONS

- Portable fire pump with Honda GX50, 48cc, 4-stroke engine.
- Equipped with a centrifugal clutch.
- Single-stage pump compatible with foam, featuring a detachable (bolt-on) system.
- Integrated fuel tank providing approximately 40 minutes of operation.
- Electronic ignition.




WICK® 100M

Part No.	Description
A	71WICK100-4HMB
B	71WICK100-4HMBV
C	71WICK100-4HMBP

- Approximate weight: 8.2 kg / 18 lb.
- The pump delivers minimum flow and pressure values as shown in the performance chart.

OPTIONAL		
	Part No.	Description
A1	70FLHPPQC	Hydro-Wick® manual primer – 38 mm / 1½" quick coupling (QC).
A2	70FLHPPPS	Hydro-Wick® manual primer – 38 mm / 1½" female NPSH.
A2	70FLHPPNH	Hydro-Wick® manual primer – 38 mm / 1½" female NH (NST).
A3	71W104-PRIMEKIT	Manual priming kit for WICK® 100-4H.
B1	6324QC27	1½" female NPSH to QC adapter.
B2	6124NM24PF	1½" NH male to 1½" female NPSH extruded adapter.
C	70FL15DLPS10	Reinforced suction hose, high pressure. Draftlite 1½"/38 mm x 10' NPSH.
D	70FLFV15PF	Foot valve with aluminum filter 1½"/38 mm female NPSH.
E	71W104-HMBPACK	Padded harness assembly for WICK® 100-4HM.

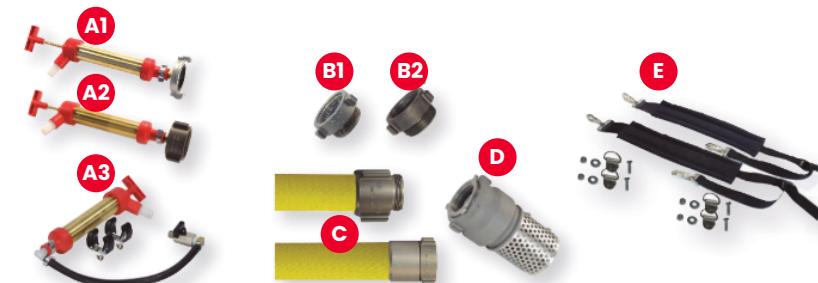

#details