



Wick FT-200 Motor Pump

High-pressure floating pump

4-stage, 2-stroke engine




QR: Use your camera or bar code scanner and download the digital PDF version

- Floating fire pump. Used for marine service, dewatering, pool maintenance, environmental cleanup, pressure washing, and irrigation.
- Standard front-type mechanical seal. No adjustment required.
- Integrated inlet strainer.
- Water-resistant silencer and air filter.
- Crankshaft support with ball bearing.
- Float-controlled automatic throttle.

WEIGHT & DIMENSIONS		
Length	29.5"	74.9 cm
Width	20.0"	50.8 cm
Height	16.5"	41.9 cm
Weight	43 lbs	19.5 kg
Discharge	1½" NPSH	38 mm NPSH*

ENGINE	
Hydro-Wick Series	2-stroke; 134 cc; 8 HP
Cylinders	"Nikasil"
Ignition	Electronic
Fuel tank	4.7 liters
Specifications subject to change without prior notice.	

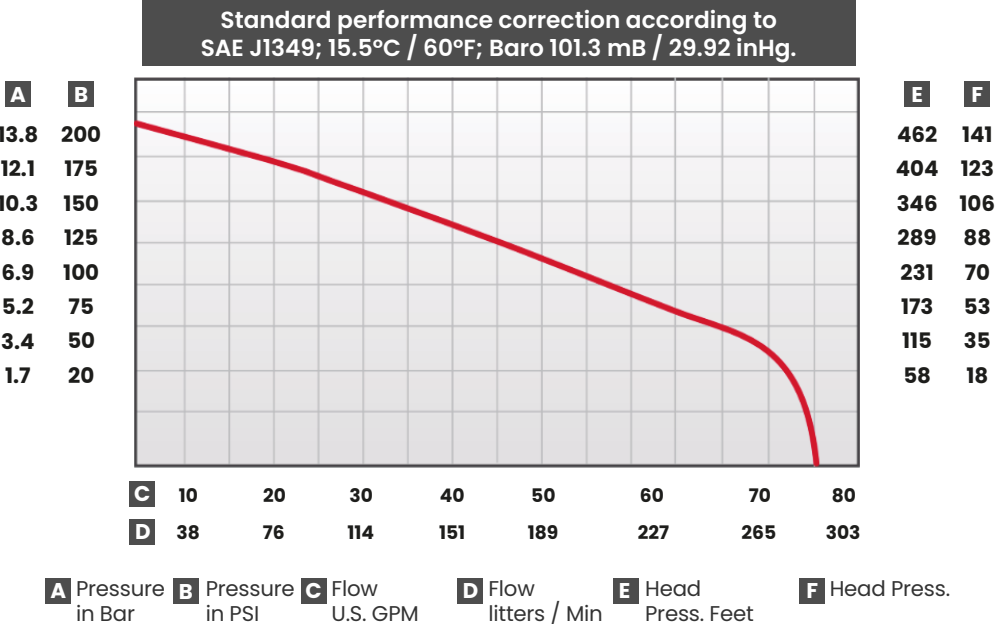

TECHNICAL SPECIFICATIONS

- Anodized aluminum housing.
- Standard front mechanical seal.
- Integrated intake screen.
- Water-resistant air filter and silencer.
- 8 HP engine, 134 cc (8.20 cu. in.) displacement, air-cooled.
- Retractable manual starter with "D" handle.
- Pressure carburetor with integrated fuel pump.
- Solid-state ignition.
- Hardened, chrome-coated cylinder bore.
- Roller bearing on the connection shaft.
- Fuel mixture of unleaded gasoline and oil.
- The pump delivers minimum flow and pressures as shown in the performance chart.



WICK® FT-200	
Part No.	Description
71WICKFT-200	Wick FT-200 Pump