



DATA SHEET

QR: Use your camera or bar code scanner and download the digital PDF version




WILDFIRE

# WICK® 100-4M

## ULTRA-LIGHTWEIGHT, MULTI-POSITION HIGH PERFORMANCE FIRE PUMP

- | The WICK® 100-4M is powered by a reliable multi-position 4-stroke Honda GX50 engine. Ideal for operating at any angle and for backpack carrying.
- | Comes mounted on a backboard-style carrying base with cutout handle. Carrying straps optional.
- | Integral fuel tank.
- | Unique clutch feature for easy starting and water conservation.
- | The pump is a detachable, single-stage foam-compatible design for easy maintenance.
- | Available with a vertical mount discharge and also available with a base-mounted hand primer.
- | Meets the emission standards of US EPA/CARB regulations.

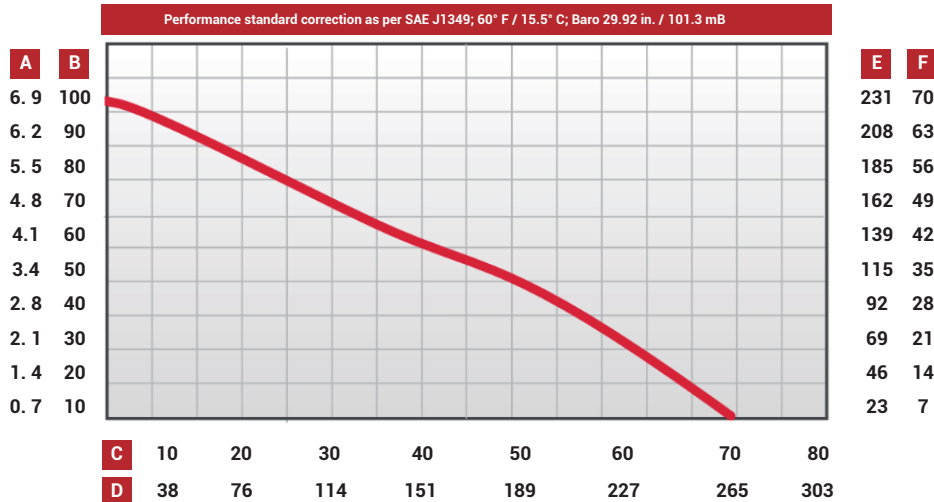

WEIGHT & DIMENSIONS		
Length	14.0"	36 cm
Width	11.0"	28 cm
Height	11.75"	30 cm
Weight	17.5 lbs	7.9 kg
Suction	1.5" NPSH	38 mm
Discharge	1.5" NPSH	38 mm

ENGINE		
Honda GX50	4-stroke; 48 cc; 2.0* gross Hp @ 7000 RPM	
Clutch Drive		
Fuel Tank Capacity	0.67 Qt. US	0.63 L
Oil Capacity	14 Qt US	0.13 L

\* Mass production engines may vary from this value. Specifications subject to change without notice

A Pressure in Bar    B Pressure in PSI    C Flow U.S. GPM    D Flow liters / Min.    E Head Press. Feet    F Head Press. Meters

[WWW.INFOREST.COM.AR](http://WWW.INFOREST.COM.AR)  
 ventas@inforest.com.ar  
 comex@inforest.com.ar


# WICK® 100-4M

DETAILS



## WICK® 100-4M

	Part#	Description
A	71WICK100-4HMB	WICK100-4M All-position Fire Pump c/w carrying base
B	71WICK100-4HMBV	WICK100-4M All-position Fire Pump c/w carrying base, vertical mount discharge
C	71WICK100-4HMBP	WICK100-4M All-position Fire Pump c/w carrying base, mounted hand primer

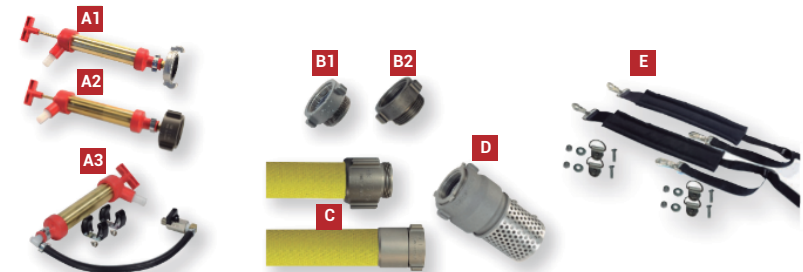

## OPTIONAL

	Part#	Description
A1	70FLHPPQC	Hand Primer QC
A2	70FLHPPPS	Hand Primer NPSH
A2	70FLHPPNH	Hand Primer NH
A3	71W104-PRIMEKIT	Hand Primer kit for WICK® 100-4H
B1	70FL15TPPS	Thread protector 1 1/2" / 38mm
B2	6124NM24PF	Adaptor .. 1 1/2" / 38mm NH Male x 1 1/2" / 38mm NPSH Female
C	70FL15DLP10	Draftlite HP suction hose .. 1 1/2"/38mm x 10'/3M c/w NPSH *
D	70FLFV15PF	Foot Valve / Strainer (Alum) 1 1/2"/38mm Female NPSH *
E	71W104-HMBPACK	Backboard padded straps kit for Wick 100-4HM pump

\* See website for complete listing of accessory and related products

## BID SPECIFICATION

- | The portable fire pump must have a Honda model GX50, 4-stroke, 48cc engine.
- | The pump must not weigh more than 18 lbs / 8.2 Kg.
- | The 4-stroke pump must be a all position capable of operating or being carried in any position.
- | The pump must have minimum flow and pressures as shown in the performance chart.
- | The pump must come standard with a centrifugal clutch.
- | The pump must meet the emission standards of US EPA/CARB regulations.
- | The pump must come standard with a transportable back pack-style base.
- | The pump must have a detachable (bolt-on) foam-compatible single-stage pump end.
- | The pump must be available with a base-mounted hand primer and also available with a vertical mount discharge.
- | The pump must have an integral fuel tank that provides approximately 40 minutes run time.
- | The pump must be equipped with an electronic ignition.