


WEIGHT AND DIMENSIONS		
Length	33.0"	84 cm
Width	19.5"	50 cm
Height	18.5"	47 cm
Weight	123 lbs	56.7 kg
Suction	2.0" NPSH	50 mm
Discharge	1.5" NPSH	38 mm



Performance standard correction according to SAE J1349:
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg

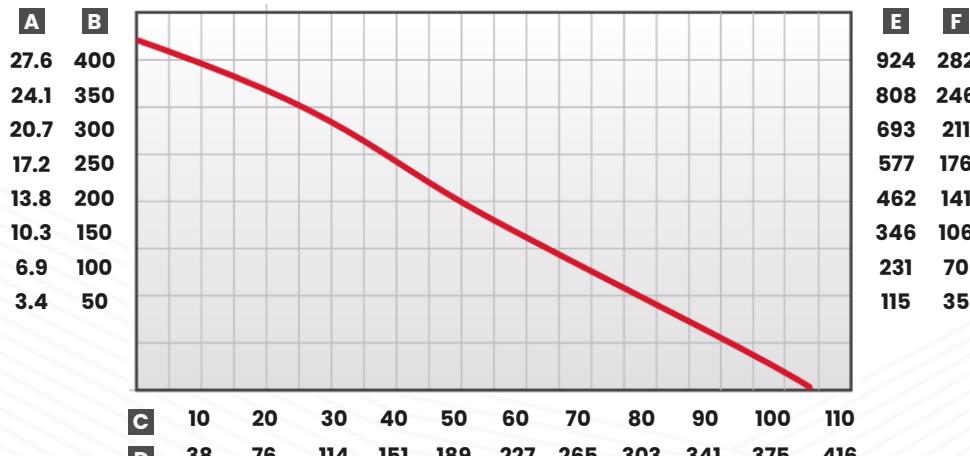

A Pressure in Bar **B** Pressure in PSI **C** Flow U.S. GPM

D Flow litters / Min. **E** Head Press. Feet **F** Head Press.

INFOREST SRL: www.inforest.com.ar
ventas@inforest.com.ar | comex@inforest.com.ar
INFOREST IBÉRICA: www.inforestiberica.com
info@inforestiberica.com

Wick XP4 – 13H Fire Pump

High-pressure fire pump – 4-stage, 4-stroke engine



QR: Use your camera or bar code scanner and download the digital PDF version

USES:

- Fire pump equipped with a 4-stroke Honda air-cooled engine with overspeed protection.
- Electric start (optional battery) and manual recoil start.
- Automotive-type air filter and external oil filter cartridge.
- 4-stage pump compatible with foam, interchangeable with the 4-stage pump and the 2-stage F200 pump to increase flow rate.
- Engine and pump coupled by a stainless-steel quick-release clamp system.
- Maintenance-free throttle.
- Standard pressure gauge and discharge adapter.
- Optional tubular or profile frame for vehicle mounting.
- Includes manual primer and pressure gauge.
- Optional: check valve.

ENGINE

Model Honda GX390	4-stroke; 13 HP @ 3600 rpm*
Oil filter	Cartridge type
Fuel tank capacity	6.5 lts / 1.7 US Gal
Ignition	Electronic

*Net output is 11.7 HP @ 3600 rpm.
Due to mass production, this value may vary slightly.

WICK® XP4 - 13H
 (HORIZONTAL SPEED ACCELERATOR MODEL, PROFILE FRAME)

	Part No.	Description
A	71WK4203-13HC	WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, profile frame for vehicle mounting.
B	71WK4203-13HT	WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, tubular frame for easy transport.
C	71WK4203-13HCH	WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, horizontal throttle accelerator, profile frame.
D	71WK4203-13HCM1	WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, auxiliary fuel tank, exhaust gas primer, profile frame.

OPTIONAL

	Part No.	Description
A	70FL15CVPPS	Poppet check valve.
B	70FLHPPPS	Poppet check valve with 25 mm / 1" side outlet.
C	70FLPFT5	25 L / 6.6 U.S. gallon fuel tank.
D	70FLPFL-M	Complete fuel line for Mercury tank.
E	70FL15TPPS	1½" NPSH thread protector.
F	70FL20TPPS	2" NPSH thread protector.
G	70FL15DLPS10	Reinforced suction hose, high pressure Draftlite 2" / 51 mm x 10' NPSH.
G	70FLFV15PF	Foot valve with female filter 2" / 51 mm NPSH.
N/A	71W42-13HRFT	Remote fuel connection kit for 13 HP GX390 Honda engine.

TECHNICAL SPECIFICATIONS

- Honda GX390 engine with overspeed protection.
- Electric start engine with optional battery and manual recoil start system as backup.
- Interchangeable 4-stage foam-compatible pump, also compatible with 2-stage pumps for higher flow rate.
- Integrated throttle control, low-maintenance design for belt/pulley operation.
- Allows transmission belt control without removing the pump or flange.
- Throttle assembly mounted with a single stainless-steel clamp, featuring a safety lock.
- Full wrap-around frame, anti-vibration and low-profile design for easy handling or vehicle mounting.
- The pump delivers minimum flow and pressure as shown in the performance chart.



#details