



2026

**PRODUCT**

**CATALOG**





|                                              |         |                                           |         |
|----------------------------------------------|---------|-------------------------------------------|---------|
| ▶ INDEX                                      | PAGE 2  |                                           |         |
| ▶ INTRODUCTION                               | PAGE 6  |                                           |         |
| ▶ WILDFIRE                                   | PAGE 13 |                                           |         |
| ▶ WATER EQUIPMENT                            | PAGE 14 |                                           |         |
| 1" Plastic Nozzle                            | Page 15 | Inforest nozzle 360                       | Page 44 |
| 1.5" Plastic Nozzle                          | Page 16 | Inforest nozzle 366                       | Page 45 |
| 25mm water wall nozzle                       | Page 17 | Inforest nozzle 560                       | Page 46 |
| Adaptors and Couplings                       | Page 18 | Inforest reel V3                          | Page 47 |
| Collapsible water tank                       | Page 19 | IRIS: Standalone Extinguishing Module     | Page 48 |
| Dismountable Australian water tank           | Page 20 | Light water backpack                      | Page 50 |
| Fast attack equipment Argentina              | Page 21 | Mandrel Service                           | Page 52 |
| Fast attack equipment Madrid                 | Page 23 | Mapache extinguishing backpack            | Page 53 |
| Fire Break II percolating hose               | Page 27 | Myti-Flo® hose                            | Page 56 |
| Fire hose washer                             | Page 28 | Portable fire attack kit                  | Page 57 |
| FireBoss® hose                               | Page 29 | Portable hose washer                      | Page 58 |
| Fireflyer helicopter water tank              | Page 30 | Quick-release water backpack              | Page 59 |
| Fixed jet nozzle                             | Page 31 | Rigid extinguishing Backpack              | Page 61 |
| FLD forestry dry hose                        | Page 32 | Self-protection nozzle                    | Page 62 |
| Floating pump kit                            | Page 33 | Self-supporting water tank                | Page 64 |
| Foam backpack                                | Page 34 | Semi-rigid hose for reel                  | Page 65 |
| Foldable water tank                          | Page 35 | Skid unit "Madrid" - 4 stage pump         | Page 66 |
| ForestGuard II dry hose                      | Page 36 | Sprinklers and injectors                  | Page 68 |
| Halos W-EBD Wildfire escape breathing device | Page 37 | Tipsa Armtex one hose                     | Page 69 |
| Hose reel                                    | Page 39 | Triton inflatable tank                    | Page 70 |
| Hose splitters and water thieves             | Page 40 | Water backpack accesories and spare parts | Page 72 |
| Inforest nozzle 301                          | Page 42 | WICK® 100M Fire Pump                      | Page 73 |
| Inforest nozzle 309                          | Page 43 | WICK® 100-4H Fire Pump                    | Page 75 |
|                                              |         | WICK® 100-4M Fire Pump                    | Page 77 |
|                                              |         | WICK® 250 Fire Pump                       | Page 79 |



|                              |          |
|------------------------------|----------|
| WICK® SI 250 Fire Pump       | Page 81  |
| WICK® 375 Fire Pump          | Page 83  |
| WICK® FT-200 Fire Pump       | Page 85  |
| WICK® FT-200 4B Fire Pump    | Page 87  |
| WICK® XP2 – 18B Fire Pump    | Page 89  |
| WICK® XP4 – 13H Fire Pump    | Page 91  |
| WICK® XP4 – 14B Fire Pump    | Page 93  |
| WICK® XP4 – 18B Fire Pump    | Page 95  |
| WICK® XP4 – 23B Fire Pump    | Page 97  |
| WICK® W4 Pump Head           | Page 99  |
| WICK® Ultraflo 18B Fire Pump | Page 101 |
| WICK® Ultraflo 23B Fire Pump | Page 103 |
| Wick Fire Pack               | Page 105 |

## ► TOOLS

|                                              |          |
|----------------------------------------------|----------|
| Aluminum fire swatter with rigid handle      | Page 108 |
| Aluminum fire swatter with telescopic handle | Page 109 |
| Ave brush hook                               | Page 110 |
| Pulaski axe                                  | Page 111 |
| Firefighter axe – Light Model                | Page 112 |
| Big John Pulaski                             | Page 113 |
| Bowie 12"                                    | Page 114 |
| Bowie 20"                                    | Page 115 |
| Derki combined rake                          | Page 116 |
| Digital anemometer                           | Page 117 |
| Double-bit axe with fiberglass handle        | Page 118 |
| Drip torch – 1 Liter                         | Page 119 |
| Drip torch – 5 Liter                         | Page 120 |
| Fire rake                                    | Page 121 |
| McLeod fire rake                             | Page 122 |

|                                             |          |
|---------------------------------------------|----------|
| Fire swatter                                | Page 123 |
| Firebroom rake                              | Page 124 |
| Forestry wrench                             | Page 125 |
| Hilara wildland hoe                         | Page 126 |
| Shrubbing tool                              | Page 127 |
| Simple fire swatter                         | Page 128 |
| Square hoe                                  | Page 129 |
| Triangle hoe                                | Page 130 |
| Wildland Fire Shovel with wooden handle     | Page 131 |
| Wildland Fire Shovel with fiberglass handle | Page 132 |
| Witch Swatter                               | Page 133 |
| Zonda 2T Blower                             | Page 134 |
| Zonda 4T Blower                             | Page 136 |

## ► BAGS AND BACKPACKS

|                                           |          |
|-------------------------------------------|----------|
| Accessory pocket                          | Page 139 |
| Backpack 14 L – Trekking                  | Page 140 |
| Backpack 30 L – Plan                      | Page 141 |
| Backpack 30 L – Trekking                  | Page 142 |
| Backpack 60 L – Trekking                  | Page 143 |
| Chest harness for communication equipment | Page 144 |
| Collapsible hose-carrying backpack        | Page 145 |
| Day Pack ES                               | Page 146 |
| Day Pack CR                               | Page 149 |
| Peto chest harness – Spain                | Page 152 |
| Rigid aluminum forestry backpack          | Page 153 |
| Rigid forestry backpack with pipe         | Page 154 |



## PERSONAL PROTECTION

### FIRE RETARDANT CLOTHING

|                                      |          |
|--------------------------------------|----------|
| Bullard PXS helmet                   | Page 157 |
| Chainsaw chaps                       | Page 158 |
| Dual X5 safety goggles               | Page 159 |
| Enduro pro headlamp                  | Page 160 |
| EURO XV fireproof hood               | Page 161 |
| Euro XV firefighter footwear         | Page 162 |
| Euro XV wildland 2-layer jacket      | Page 163 |
| Euro XV wildland bandana             | Page 166 |
| Euro XV wildland fire overall        | Page 167 |
| Euro XV wildland fire pants          | Page 170 |
| Euro XV forestry glove - closed cuff | Page 173 |
| Euro XV forestry glove - open cuff   | Page 175 |
| Euro XVI wildland 4-layer jacket     | Page 177 |
| Euro XVI Wildland Fire Suit          | Page 180 |
| EURO XVI firefighter footwear        | Page 185 |
| Everest AF goggles                   | Page 187 |
| Fireproof collective shelter         | Page 188 |
| Fireproof curtain                    | Page 189 |
| Fireproof skirt                      | Page 190 |
| Forest pants belt                    | Page 191 |
| FS6 Individual fireproof shelter     | Page 192 |
| PRO wildland fire gloves             | Page 193 |
| Tactical belt with metal anchor      | Page 194 |
| Technical rescue suit                | Page 195 |
| Sicor EOM Wildland Helmet            | Page 198 |
| Sicor VFR EVO Urban Helmet           | Page 200 |

### PAGE 155

### PAGE 156

|                              |          |
|------------------------------|----------|
| Steel Pro Zex safety goggles | Page 201 |
| Structural Glove             | Page 202 |
| Univet 611 Safety Goggles    | Page 203 |
| Wildland mask                | Page 204 |

### ▶ WORKWEAR

|                                  |          |
|----------------------------------|----------|
| Andes Soft Pants                 | Page 206 |
| Chainsaw Chaps                   | Page 207 |
| Dryas grip cut-resistant gloves  | Page 208 |
| Dryas shell cut-resistant jacket | Page 209 |
| Euro XV 1-layer work jacket      | Page 211 |
| Euro XV work pants               | Page 213 |
| Euro XVI 1-layer work shirt      | Page 215 |
| Euro XVI 2-layer work shirt      | Page 217 |
| Euro XVI work pants              | Page 219 |
| Euro XVI work overall            | Page 222 |
| Extrication gloves               | Page 224 |
| Technical vest                   | Page 225 |

### PAGE 205

### FREE TIME

|                                 |          |
|---------------------------------|----------|
| Helsinki model softshell jacket | Page 228 |
| Micro - fleece jacket           | Page 229 |
| Micro - fleece vest             | Page 230 |
| OSLO model softshell jacket     | Page 231 |

### PAGE 227

## STRUCTURAL FIRE

### WATER EQUIPMENT

|             |          |
|-------------|----------|
| Foam nozzle | Page 234 |
|-------------|----------|

### PAGE 232

### PAGE 233

|                                 |          |
|---------------------------------|----------|
| Hose reel                       | Page 235 |
| Hose washer                     | Page 236 |
| Inforest 360 nozzle             | Page 237 |
| Inforest 366 nozzle             | Page 238 |
| Inforest V3 hose reel           | Page 239 |
| Professional firefighter's hose | Page 240 |
| Storz adapters and reducers     | Page 241 |
| Semirigid hose for reel         | Page 243 |
| Universal adjustment wrench     | Page 244 |
| Whitworth adapters and reducers | Page 245 |

## ► **TOOLS**

## **PAGE 246**

|                                        |          |
|----------------------------------------|----------|
| 8-in-1 rescue tool                     | Page 247 |
| BearTrap multifunction light           | Page 248 |
| Firefighter axe with fiberglass handle | Page 249 |
| Forcible entry Halligan bar            | Page 250 |
| Forced entry axe                       | Page 251 |
| Halligan fiberglass hook               | Page 252 |
| Hungarian Pike Pole                    | Page 253 |
| Multipurpose hatchet                   | Page 254 |
| Pike Pole                              | Page 255 |
| PolyTac 90 X flashlight                | Page 256 |
| Portable Scene Light                   | Page 257 |
| Portable Scene Light II                | Page 258 |
| Splithammer axe with fiberglass handle | Page 259 |
| Telescopic Pike Pole                   | Page 260 |

## **RESCUE**

## **PAGE 261**

### ► **BAGS AND BACKPACKS**

### **PAGE 262**

|                          |          |
|--------------------------|----------|
| Big trauma bag           | Page 263 |
| Large first aid backpack | Page 264 |
| Small first aid backpack | Page 265 |
| Small trauma bag         | Page 266 |

### ► **IMMOBILIZATION AND TRANSFERS**


### **PAGE 267**

|                                       |          |
|---------------------------------------|----------|
| Adult plastic spine board             | Page 268 |
| Basket-type rescue stretcher          | Page 269 |
| Corrugated plastic splint set         | Page 270 |
| Fastening straps                      | Page 271 |
| Kendrick extrication device           | Page 272 |
| Lateral head immobilizer              | Page 273 |
| Multi-size flat cervical collar       | Page 274 |
| Multi-size pediatric cervical collar  | Page 275 |
| Pediatric immobilizer                 | Page 276 |
| Pediatric kendrick extrication device | Page 277 |
| Seat belt cutter                      | Page 278 |
| Semi-rigid splint set                 | Page 279 |
| Spider harness                        | Page 280 |
| Vacuum mattress                       | Page 281 |
| Vacuum splint set                     | Page 282 |

## **Final**

## **Page 283**



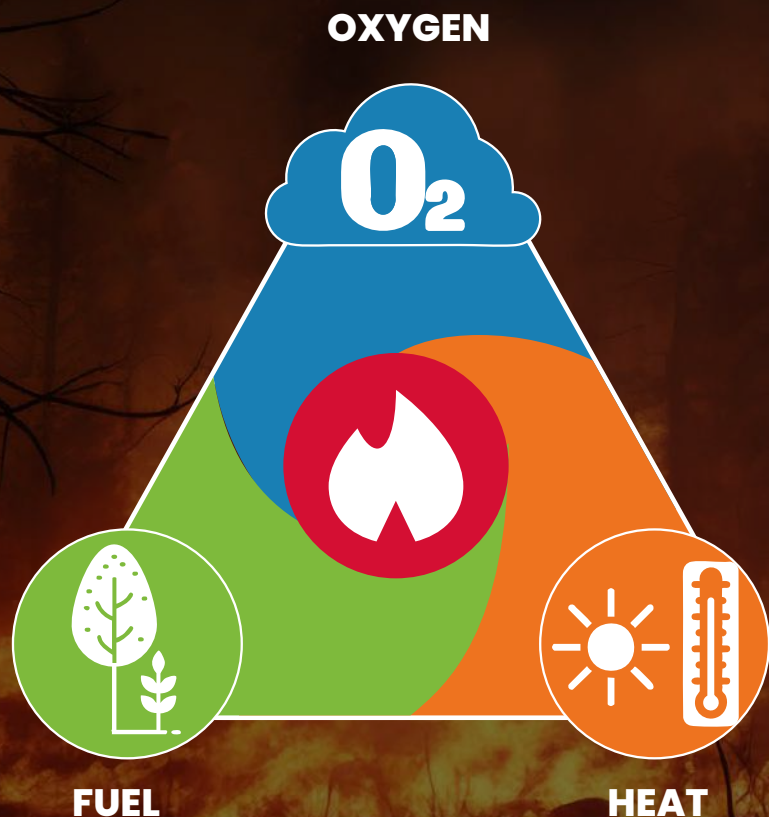


Fire is a chemical reaction that can only be sustained when three elements coexist:

$O_2$  oxygen, fuel and heat.

This balance, represented by the **Fire Triangle**, explains how wildfires start and are sustained. Breaking any one of its sides means interrupting the fire.



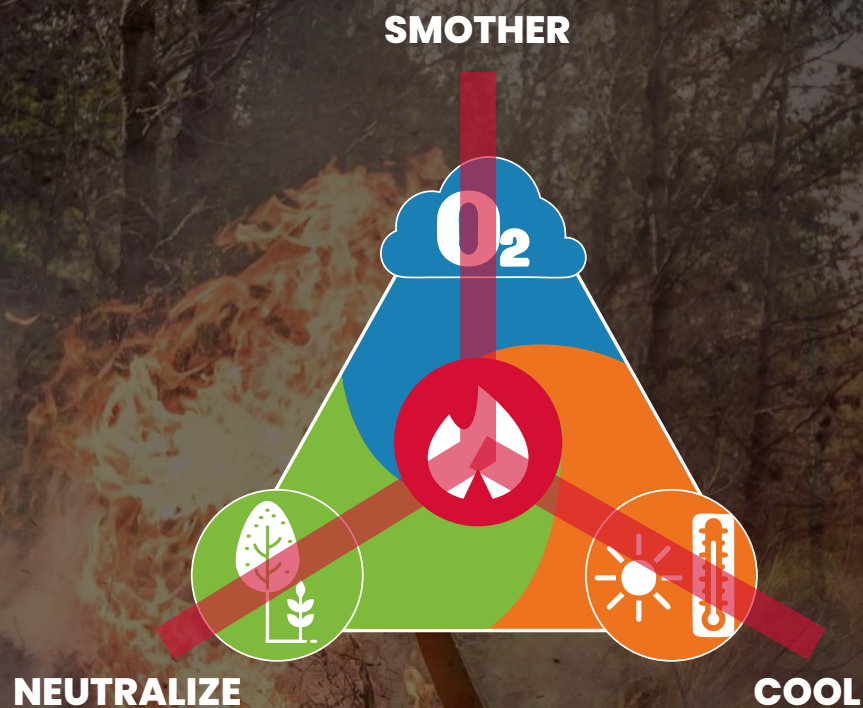

Basic firefighting techniques aim to eliminate one of the three components of fire:

**Cooling:** reducing temperature by applying water or foam.

**Neutralizing:** removing or eliminating the fuel.

**Smothering:** limiting the oxygen that feeds the flames.

These actions are carried out using **hand tools and portable pumps**, adapted to each terrain and type of fuel.






The **direct method** acts on the fire line using tools such as **fire beaters, backpack pumps, and portable pumps**.

The **indirect method** is applied at a distance, creating **fuel-free control lines** or using **prescribed fire** to contain the wildfire.

Both methods **complement each other** depending on fire intensity and environmental conditions.

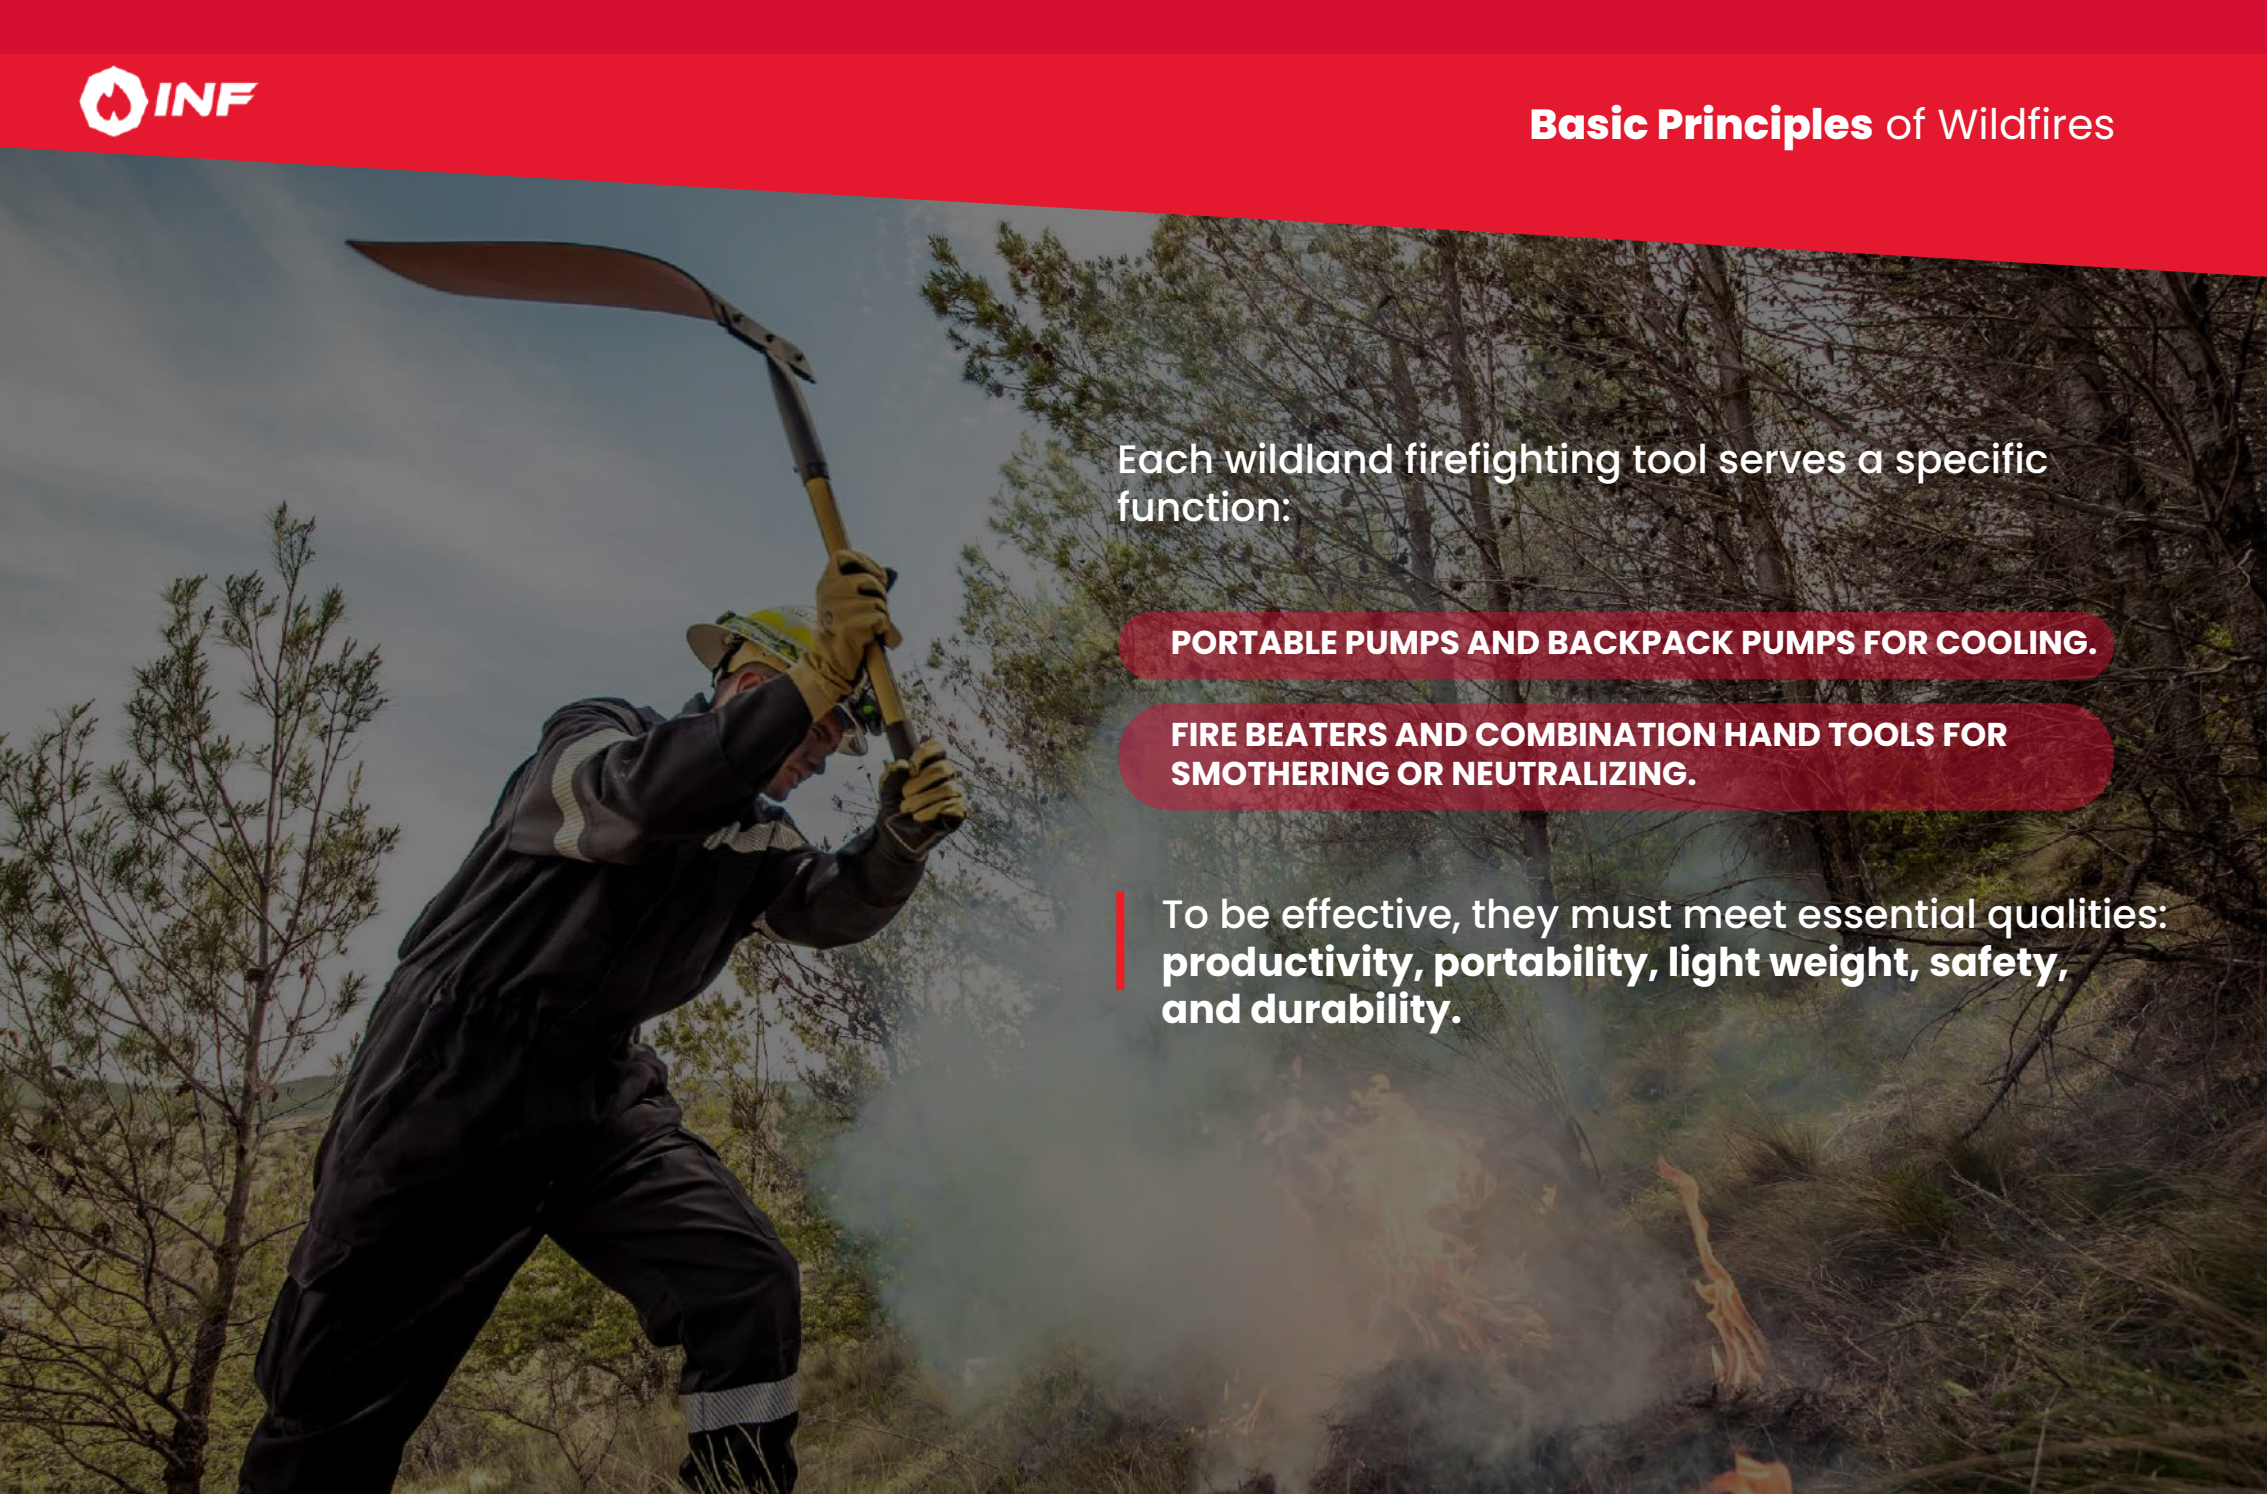

A full-page background image showing a wildland firefighter in a dark protective suit and yellow helmet, using a large curved blade tool (likely a Pulaski) to clear vegetation. The firefighter is positioned on the left side of the frame, leaning forward. The background consists of a dense forest of tall, thin trees under a cloudy sky. In the lower right foreground, there is a small fire with smoke rising from it.


Each wildland firefighting tool serves a specific function:

**PORTABLE PUMPS AND BACKPACK PUMPS FOR COOLING.**


**FIRE BEATERS AND COMBINATION HAND TOOLS FOR SMOTHERING OR NEUTRALIZING.**

To be effective, they must meet essential qualities: **productivity, portability, light weight, safety, and durability.**

# ¿Where are we?

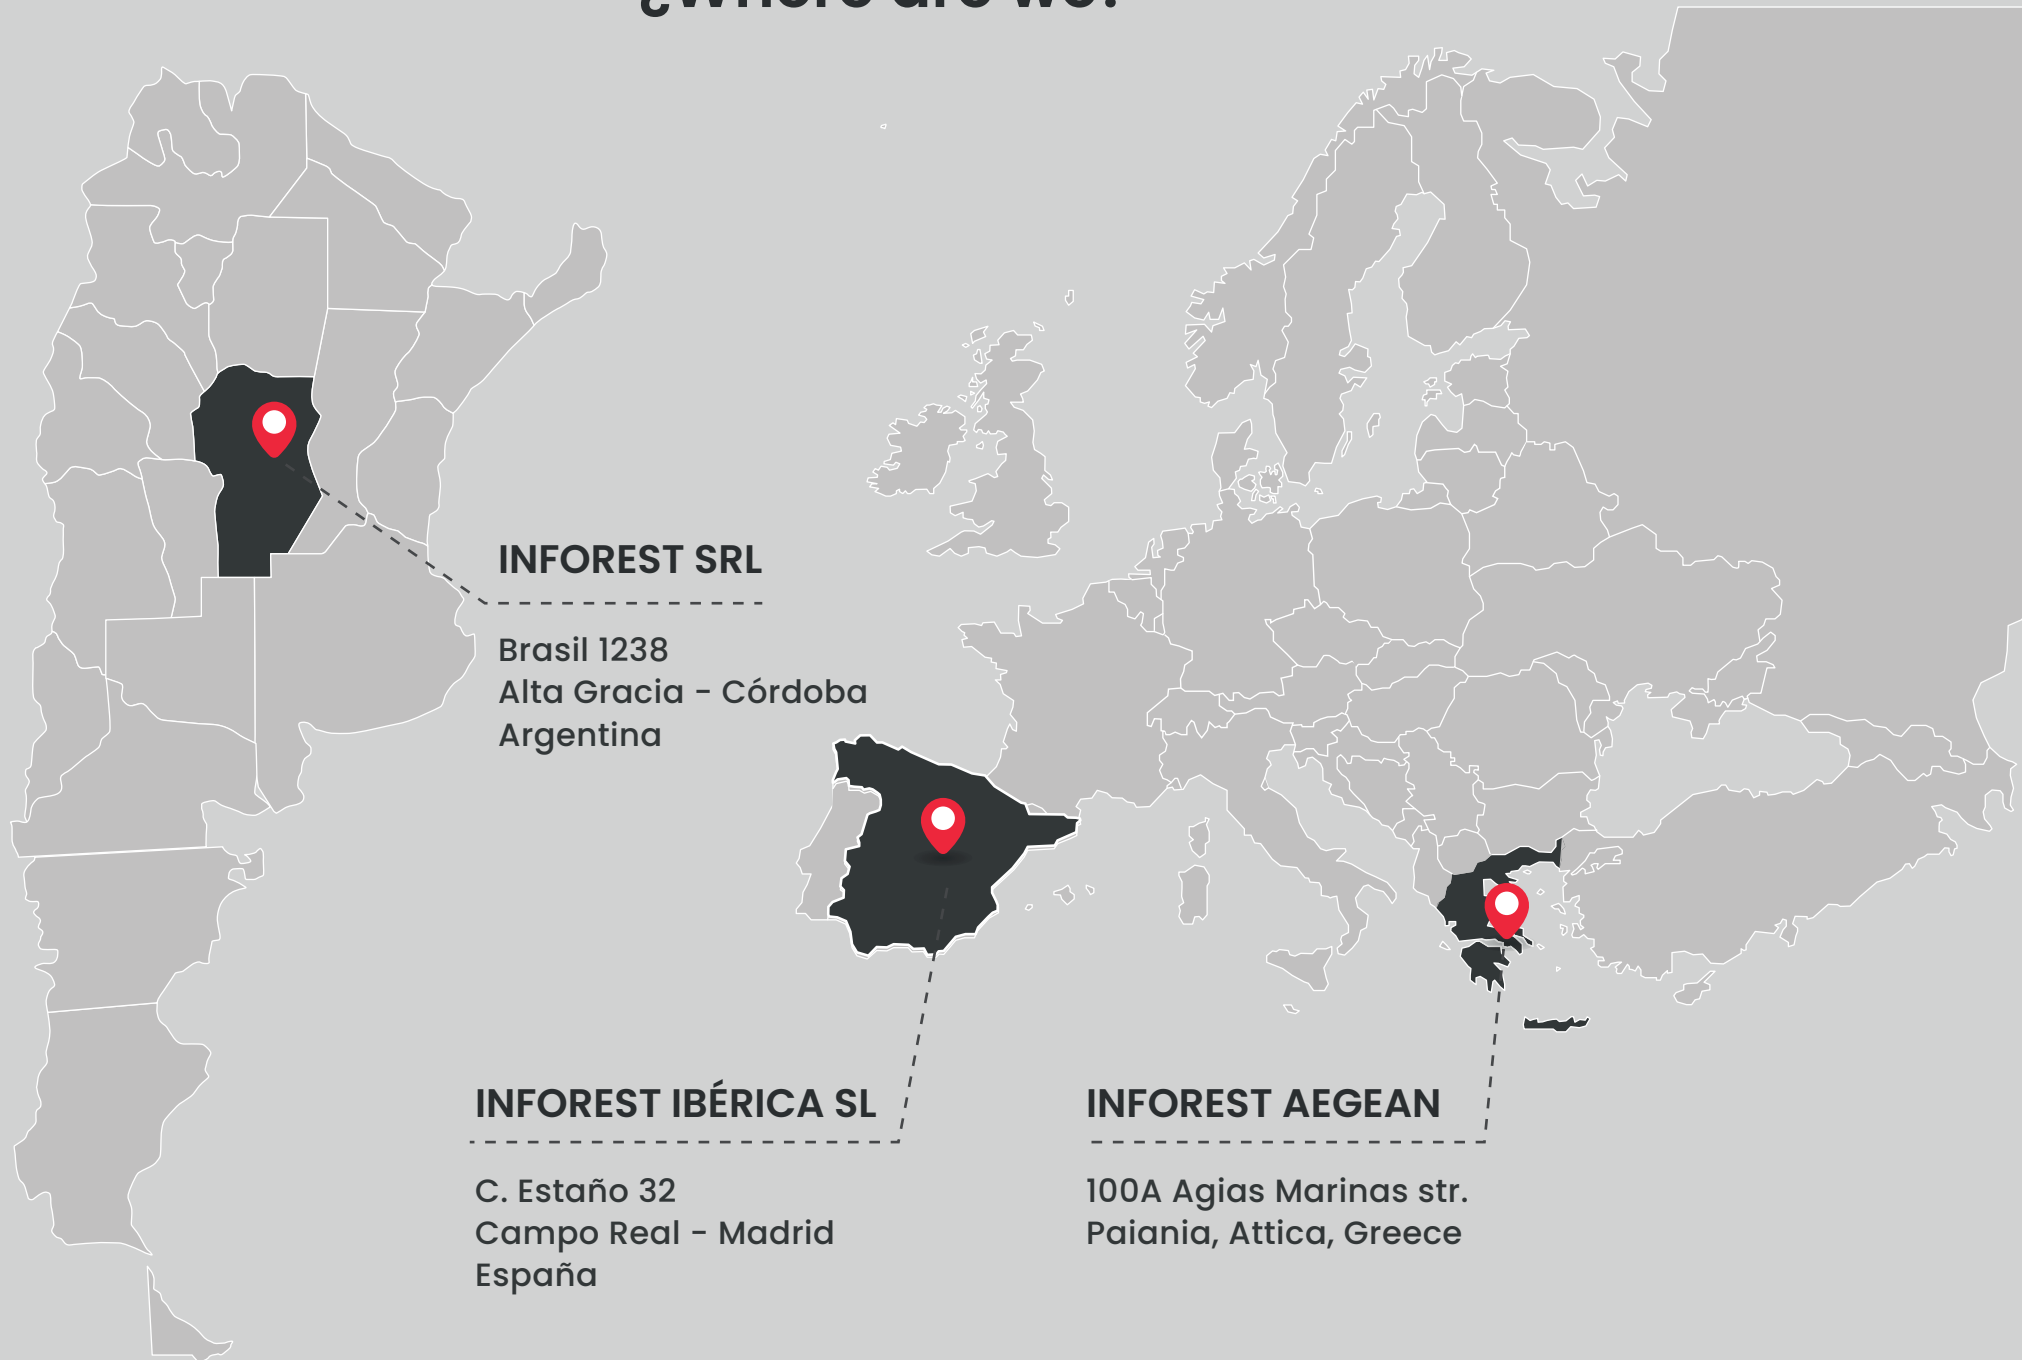



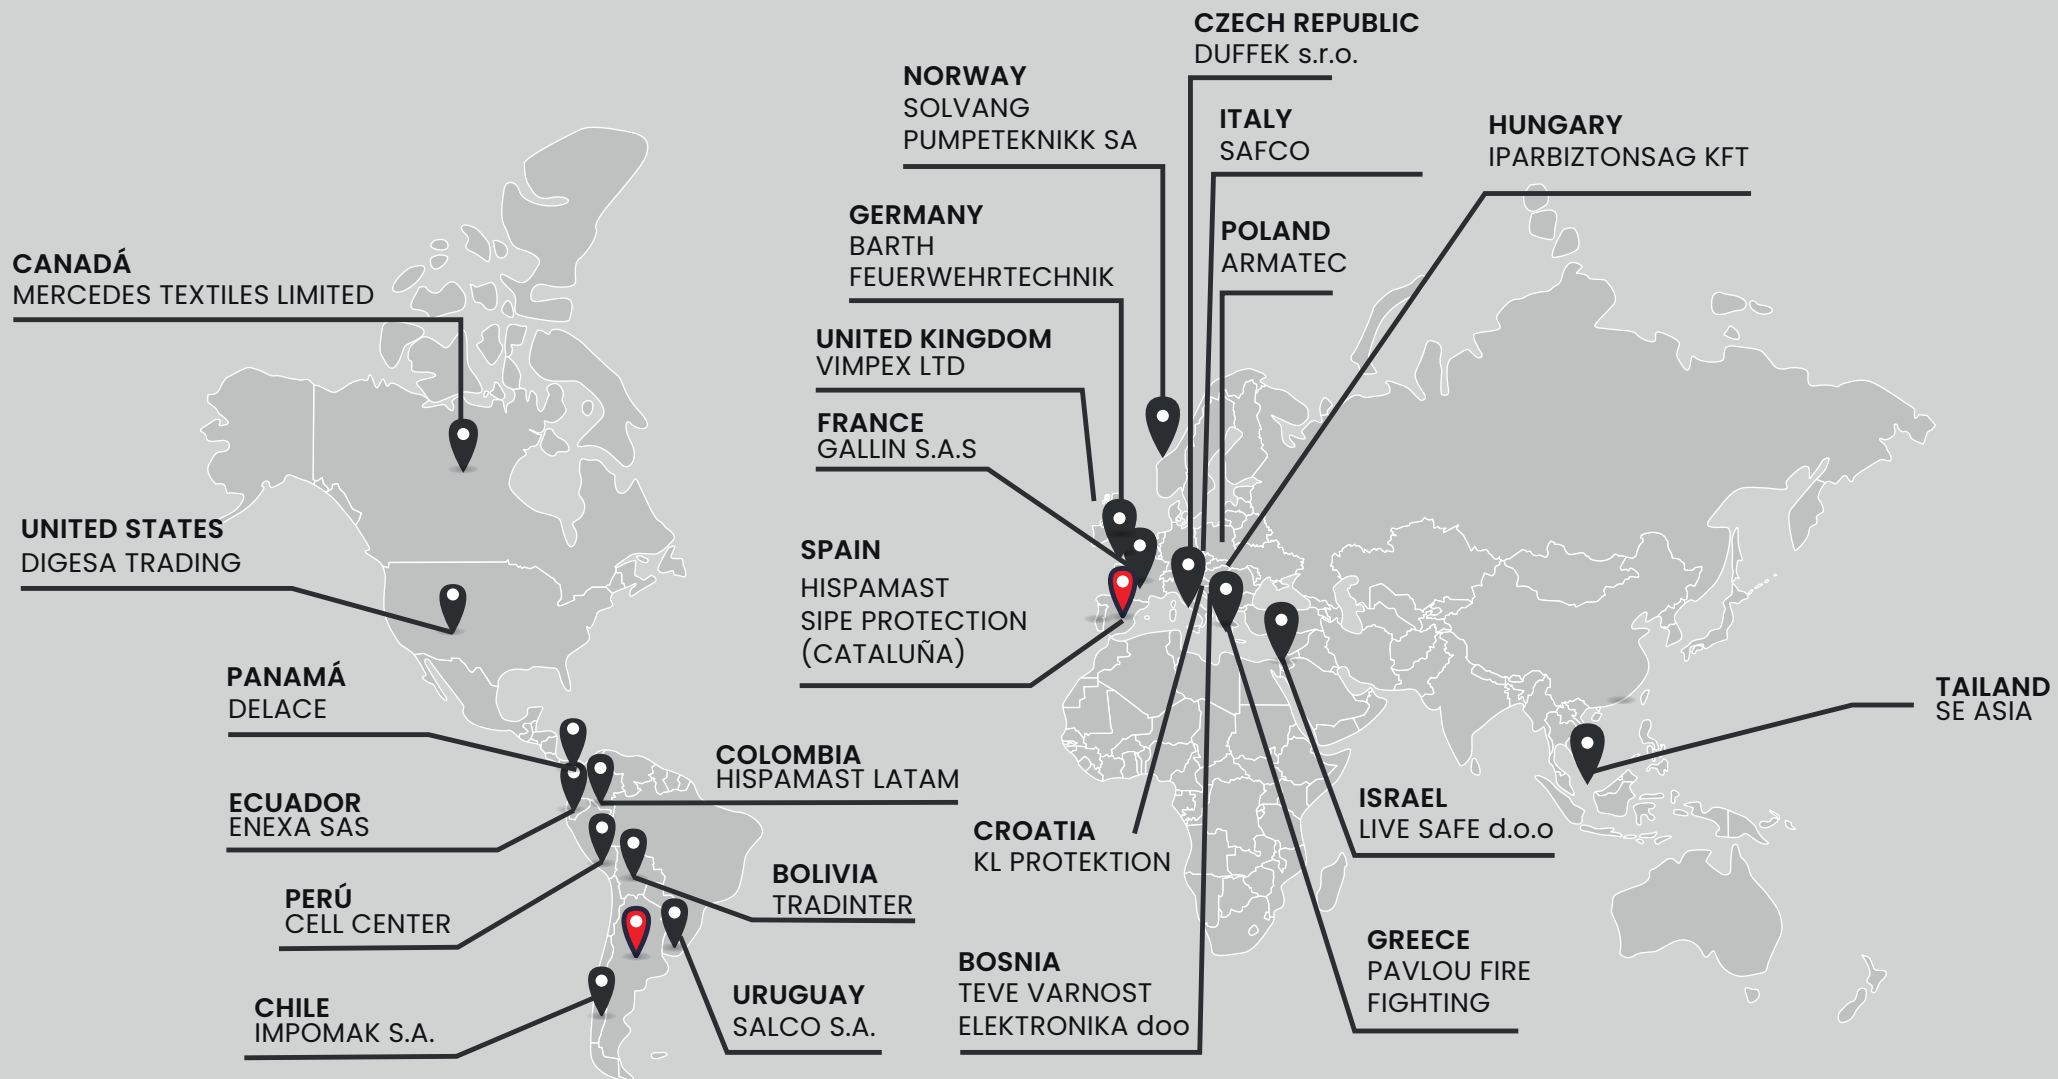




# MASTER DISTRIBUTION

In Latam and Europe



**MERCEDES  
TEXTILES LIMITED**

Innovación a su disposición.

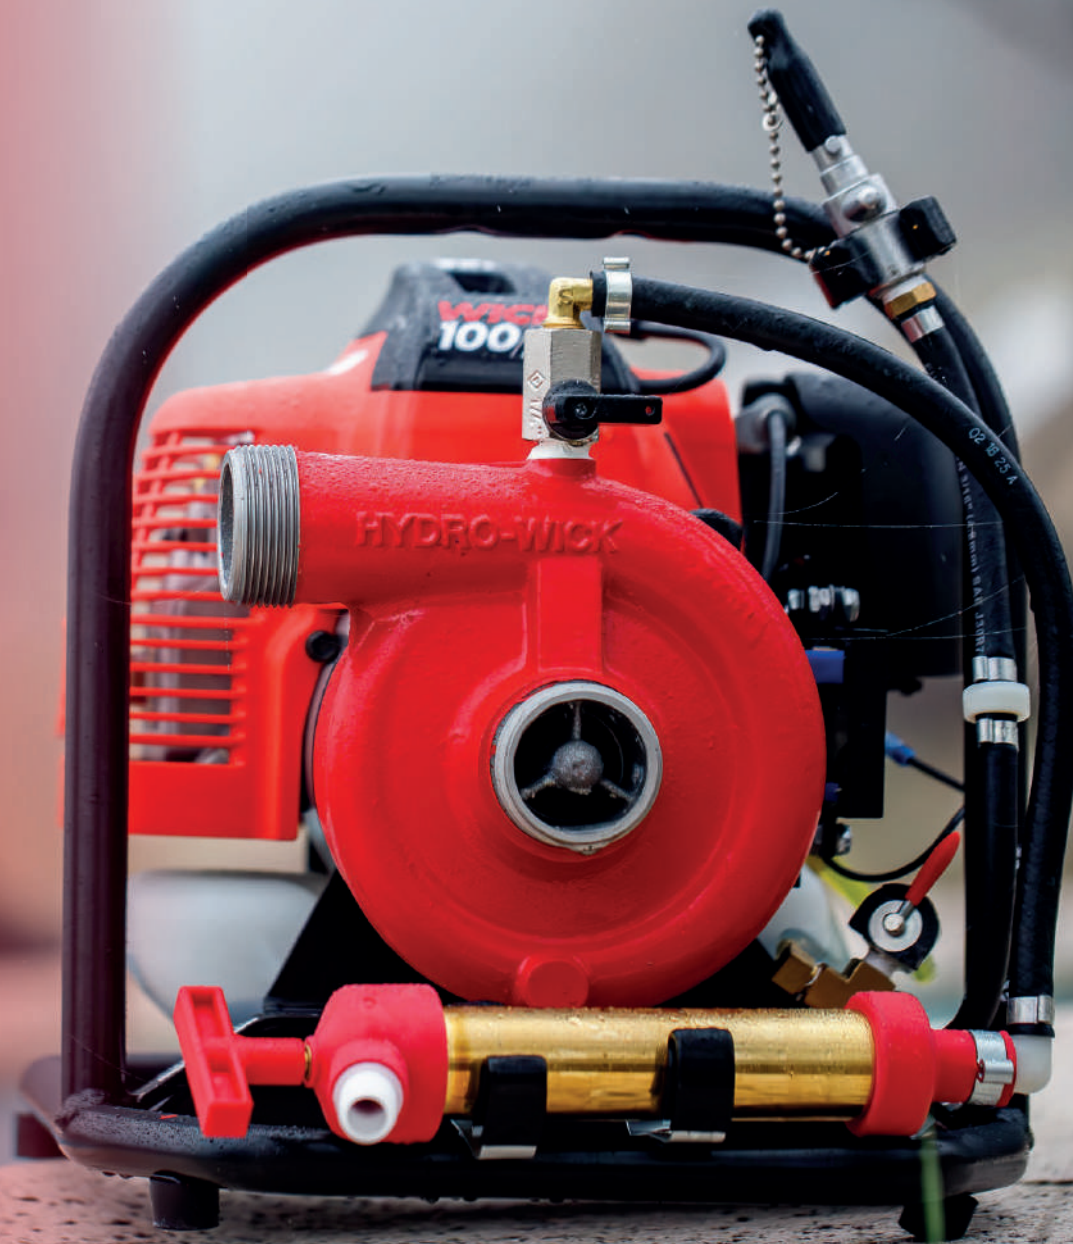



# WILDFIRE

## INFOREST SRL

Instagram @inforest\_incendiosforestales Facebook Inforest WhatsApp +54 (0) 3547-430529/406693  
Email ventas@inforest.com.ar comex@inforest.com.ar Website www.inforest.com.ar

## INFOREST IBÉRICA

Instagram @inforestiberica Facebook Inforest WhatsApp +34 681 314646  
Email info@inforestiberica.com Website www.inforestiberica.com





# PERSONAL PROTECTION

## ► FIRE RETARDANT CLOTHING

### INFOREST SRL

📱 @inforest\_incendiosforestales 🌐 Inforest ☎ +54 (0) 3547-430529/406693  
✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

### INFOREST IBÉRICA

📱 @inforestiberica 🌐 Inforest ☎ +34 681 314646  
✉ info@inforestiberica.com 🌐 www.inforestiberica.com





# 1" Plastic Nozzle

- Full Jet / Fog Nozzle
- Lightweight, durable, corrosion-resistant, and cost-effective forestry nozzle.
- Allows water application in full jet, spray, or fog modes.
- Made of high-quality, high-resistance polypropylene, this nozzle provides excellent durability under high temperatures and corrosive conditions.

## NOMINAL FLOW RATES:

- 1" (25 mm): discharge up to 83 LPM

## INLET:

- 1" (25 mm) BSP



QR: Use your camera or bar code scanner and download the digital PDF version



## 1.5" Plastic Nozzle

Full Jet / Fog Nozzle

Lightweight, durable, corrosion-resistant, and cost-effective forestry nozzle.

Allows water application in full jet, spray, or fog modes.

Made of high-quality, high-resistance polypropylene, this nozzle provides excellent durability under high temperatures and corrosive conditions.

### NOMINAL FLOW RATES:

1.5" (38 mm): discharge up to 284 LPM

### INLET:

1.5" (38 mm) BSP



QR: Use your camera or bar code scanner and download the digital PDF version





## 25mm Water wall nozzle



QR: Use your camera or bar code scanner and download the digital PDF version

— The curtain nozzle is designed to reduce weight and water droplet size, optimizing its heat absorption capacity and creating a protective water curtain against advancing flames.

— As water passes through the fitting and body, it strikes a front shield with a cycloidal shape. Through the upper slot, located at the junction of the body and the shield, the water exits forming a protective curtain.

— The discharge volume and curtain formation depend on water pressure. Optimal operating pressure: 16 bar. Fitting: 1" Barcelona male coupling according to UNE 23400 standard. Consumption: 120 L/min.

— Includes a "Y" filter with PN16 mesh screen.

### TECHNICAL SPECIFICATIONS:

- **Material:** High-strength stainless-steel shield, BCN (1") male UNE 23.400 (aluminum).
- Optimal operating conditions:
  - **Working pressure:** 16 bar.
  - **Hose:** 10 to 20 m, 25 mm Barcelona UNE 23.00 coupling.
  - **Flow rate:** 120 L/min
  - **Curtain width:** 11 meters.
  - **Curtain height:** 4,5 meters.
  - **Weight:** 900 gr.

*Under these conditions, the curtain dimensions, flow rate, and droplet size are optimized for maximum protection and heat absorption during self-protection maneuvers.*



# Adaptors and Couplings



QR: Use your camera or bar code scanner and download the digital PDF version

## COUPLINGS CAN BE:

- Threaded couplings: NPSH and BSP.
- Quick couplings: Storz or QC (Quick Connect).

### AVAILABLE ADAPTORS

- We offer adaptors designed to ensure compatibility between different coupling standards. This guarantees efficient and effective joint operation, maintaining a continuous water flow without issues.

- 1 CamLock quick coupling
- 2 CamLock quick coupling
- 3 NPSH/QC tandem adaptor
- 4 Male thread adaptor 2" to female thread 1.5" NPSH
- 5 Thread protector
- 6 Female thread cap 1.5"
- 7 Female thread adaptor to Storz
- 8 Male thread adaptor to Storz







# Collapsible water tank



QR: Use your camera or bar code scanner and download the digital PDF version

## USES:

- Easy to assemble and transport. Designed to store water for supply or direct firefighting operations in remote or hard-to-access areas.
- Allows large volumes of water to be available without relying on tanker trucks.
- Closed tanks maintain stored water in optimal conservation conditions and free from contamination.

## DESIGN AND MATERIALS

- Constructed with polyester fabric coated with PVC.
- Can be fitted with the necessary connections for filling or discharge using portable fire pumps.

## CAPACITY

- Tanks are available in capacities ranging from 500 to 30,000 liters of storage.



# Dismountable Australian Water Tank

## USES

—  
Ideal for storing large quantities of water.

## DESIGN AND MATERIALS

—  
Dismountable and reusable, it can be installed in different locations and moved whenever necessary.

—  
Easy to handle. It does not require the use of floors, fixed structures, or specialized labor for installation.

—  
Built with a modular and transportable steel structure, featuring an electro-galvanized sheet metal inner lining.

—  
Inner PVC canvas liner guarantees waterproofing. The material can be repaired in case of cuts or tears.

—  
Waterproof PVC liner (600 microns thick) that withstands temperatures down to -20°C.

## TECHNICAL SPECIFICATIONS

|                  |                            |
|------------------|----------------------------|
| Capacity         | from 15,000 L to 100,000 L |
| Number of panels | Depends on tank capacity   |
| Height           | 1,25 m                     |
| Outlet           | 3" female thread with cap  |



—  
QR: Use your camera or bar code scanner and download the digital PDF version





## Fast attack equipment Argentina



QR: Use your  
camera or bar  
code scanner  
and download  
the digital PDF version

### USES:

The INFOREST rapid attack unit stands out for its functionality, allowing access to confined areas where larger vehicles cannot reach. Designed for combating fires in their early stages, it provides an effective response for various emergency situations.

Built with a polyethylene (PE) tank reinforced with an internal steel structure, it offers a lightweight unit (approximately 130 kg) and a capacity of up to 750 liters, with 15 liters of foam storage, demonstrating great strength and incorporating lighter and more durable materials. Due to its compact dimensions and lightweight design, the Rapid Attack Unit is ideal for installation on any utility vehicle.

Its hoses and pipes are made of stainless steel.

The system includes the INFOREST hose reel, operated manually with a 25-meter delivery hose and an adjustable 1" nozzle. Compatible with different types of pumps such as WICK 100-4H (4-stroke engine), WICK 100M (2-stroke engine), and WICK 250 (4-stroke engine). Each pump features its own suction hose and quick connectors, with sufficient capacity and pressure for efficient and precise water or foam spraying.

It can be equipped with various nozzle options: fog/stream, fixed or adjustable flow.

### DISCHARGE OUTLET:

Includes a 1.5" discharge outlet to connect hoses; the pump's pressure output allows coupling up to three hoses with excellent pressure and flow.



### TANK:

The tank comes with integrated tool compartments, a manual lid, a suction hose, a foot valve, and standard accessories.



Pump  
Mercedes Textiles



### PUMP:

Equipped with Mercedes Textiles centrifugal pumps, models WICK 100-4H (4-stroke), WICK 100M (2-stroke), and WICK 250 (4-stroke).



We use INFOREST 360° adjustable nozzles, allowing up to 30 minutes of autonomy. Foam or retardant can also be applied through the integrated dosing system in the tank.

### HOSE REEL:

The system includes the INFOREST manual hose reel, with a 25-meter hose and a manual rewind handle. It features an integrated safety locking system and an ergonomic reel handle.



### NOZZLE:

Available with different options: fog/stream or fixed and adjustable flow.





# Fast attack equipment Madrid



QR: Use your camera or bar code scanner and download the digital PDF version

The “Madrid” Fast attack equipment is designed to be mounted on Pick-Up or chassis-type vehicles and is intended for professional firefighting brigades. It features a centrifugal pump with up to 26 bar pressure and a maximum flow rate of 390 l/min.

The motor pump assembly is mounted on a specially designed frame that adapts to the water tank.

The frame is made of folded steel sheet and treated with cataphoresis coating for corrosion protection.

INCLUDES:

|                  |                                                                  |
|------------------|------------------------------------------------------------------|
| Motor            | Gasoline 14 HP                                                   |
| Centrifugal Pump | 390l/min / up to 26bar.                                          |
| Water Tank       | 500 l capacity, made of reinforced composite polyester material. |


BRIGGS AND STRATTON 14HP ENGINE




|                 |                                                                                                                                                                         |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description     | Equipped with a 4-stroke engine featuring overspeed protection. It also includes an electric start (optional battery) and a manual recoil start system.                 |
| Power           | 14 HP.                                                                                                                                                                  |
| Characteristics | Air-cooled.<br>Cyclonic-type air filter.<br>Engine and pump coupled with a quick-release stainless steel system.<br>Automatic low-pressure shutoff for pump protection. |

|                     |                                                                                                          |
|---------------------|----------------------------------------------------------------------------------------------------------|
| Description         | Four-stage centrifugal pump that enhances flow and pressure performance. Compatible with foam agent use. |
| Material            | Parts made of aluminum.<br>Pressure-cast housing with oil immersion mechanism.                           |
| Maximum Pressure:   | 26 bar (380psi)                                                                                          |
| Maximum Speed       | Speed increaser                                                                                          |
| Dimensions          | 280 x 280 x 280mm                                                                                        |
| Suction             | Ø50mm (2"NPSH)                                                                                           |
| Maximum Flow Rate   | 390l/m                                                                                                   |
| Power Consumption   | n/dHp                                                                                                    |
| Maximum Temperature | +60°C                                                                                                    |
| Weight              | 6,7 kg                                                                                                   |
| Outlet              | Ø38mm (1,5" NPSH)                                                                                        |

WICK FSP4200 PUMP

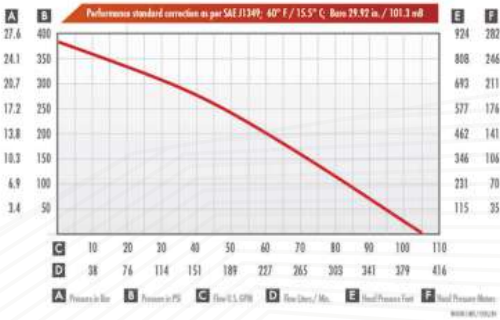



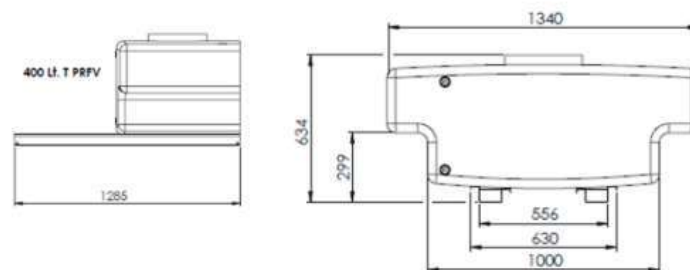


## T-SHAPED TANK

Its monolithic block provides excellent resistance to internal pressure and external impacts, thanks to its efficient structure that perfectly integrates the chemical and mechanical bonding of its parts.

The bottom features a special design compatible with forklift use, allowing quick installation and removal of the kit. Additionally, for greater safety, it includes two high-density polyurethane reinforcements that help withstand the stresses applied when the kit is in operation.

The top section includes a manhole opening for inspection and maintenance throughout the tank's service life.

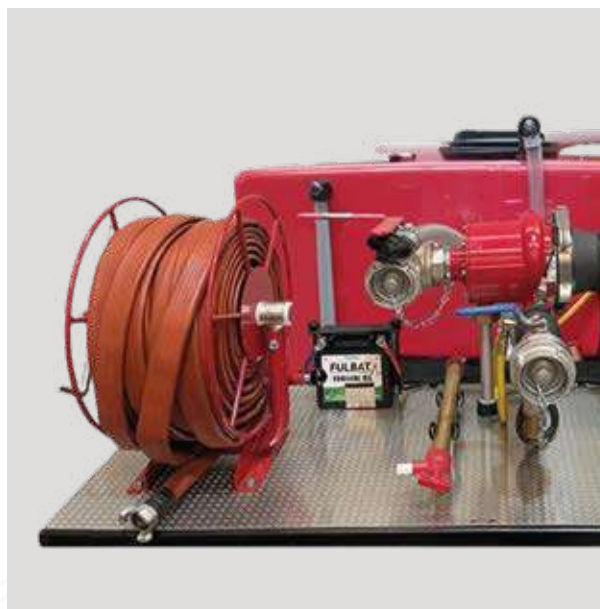

## INCLUDED COMPONENTS:

- Overflow vent.
- Feed pipe for the pump.
- Tank filling pipe.
- Optical water level indicator on the tank.
- Drain pipe with valve.

## MATERIALS:

- Monolithic composite material reinforced with 6.5 mm thick polyester.
- Flame resistant.

## TECHNICAL SPECIFICATIONS:

500-liter capacity.

## LOW-PRESSURE KIT EQUIPMENT

Rod-type hose reel, strong and lightweight, for storage and transport of flat hoses. Feed system.



Four sections of 3-layer flexible hose, 25 mm in diameter and 20 m long per section, with 25 mm aluminum stamped Barcelona couplings at both ends.



One INFOREST adjustable flow nozzle, model 366. Allows adjustment from fog to full stream with just a quarter turn of the nozzle.  
Inlet: 1" (25 mm)  
Selectable flow rates: 19–37–90–150 LPM



## WARRANTY AND CERTIFICATIONS

### WARRANTY

The INFOREST Low-Pressure Unit is covered by a minimum 2-year warranty from the start-up date and 10 years for the tank.

### STANDARDS

The tank complies with the following standards:  
> DIN 53438 – 3: Classification F1/37 m/m

### SAFETY AND HEALTH

- The engine's hot parts are protected against accidental direct contact.
- Controls and operating mechanisms are easily accessible from the operator's position, standing at the rear of the pick-up vehicle where the unit is installed.
- The engine's exhaust outlet is oriented to direct gases away from the operator.
- Each unit is supplied with an operator's manual in Spanish, including safety guidelines, precautions, required PPE, and maintenance schedules.

### DOCUMENTATION

The unit is delivered with the following documentation:

- CE conformity certificate
- Warranty certificate
- User and maintenance manual
- Spare parts catalog





## Fire Break II percolating Hose

Available in 1" and 1.5"

- Premium single-jacket fire hose, fully synthetic, durable, and lightweight. Its patented Hydra-Wick® self-wetting process produces an effect that keeps the outer jacket moist.
- Its Mertex® lining provides low friction for maximum flow and superior adhesion.
- Resistant to chemical products, petroleum derivatives, ozone, UV rays, hydrolysis, decomposition, and mold. Remains flexible down to -55°C (-65°F).
- Can be used with quick-connect and threaded couplings.
- Meets all performance requirements of NFPA 1961, ULC S519.1, and Underwriter's Laboratories & Factory Mutual.




QR: Use your camera or bar code scanner and download the digital PDF version

### TECHNICAL SPECIFICATIONS – 1" DIAMETER:

|                  |         |
|------------------|---------|
| LENGTH           | 30 mts. |
| BURST PRESSURE   | 900 PSI |
| WORKING PRESSURE | 300 PSI |

### TECHNICAL SPECIFICATIONS – 1.5" DIAMETER:

|                  |          |
|------------------|----------|
| LENGTH           | 30 mts   |
| BURST PRESSURE   | 1000 PSI |
| WORKING PRESSURE | 300 PSI  |

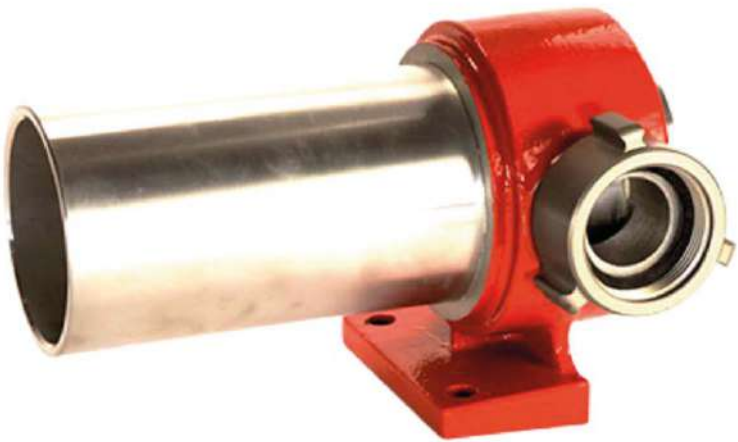

## Fire hose Washer

### USES:

Specifically designed for cleaning hoses used in forestry and municipal applications. It is a compact, simple, and highly effective tool.

### DESIGN AND MATERIALS:

- The angled water jets are designed to clean effectively and facilitate hose movement through the washer.
- Cleans 38 mm (1 1/2") hoses with quick-connect or threaded couplings, and 76 mm (3") hoses with threaded couplings only.



QR: Use your camera or bar code scanner and download the digital PDF version





## FireBoss® Hose

### USES

Wildland fire hose, resistant and lightweight.

### DESIGN & MATERIALS

- Single-jacket construction, fully synthetic and abrasion-resistant.
- PermatekTMhp treatment against corrosion, moisture absorption, and mildew.
- Mertex® lining, producing extremely low friction loss for maximum flow and superior adhesion for long service life.
- Resistant to most chemicals, petroleum derivatives, ozone, UV exposure, hydrolysis, decomposition, and mildew.
- QC couplings.

### CERTIFICATIONS

- Meets or exceeds all performance requirements of NFPA 1961, Underwriter's Laboratories & Factory Mutual.
- Meets or exceeds all performance requirements of U.S.D.A. Specification 5100-187C Type II.



QR: Use your camera or bar code scanner and download the digital PDF version

| Specification | Hose Diameter |     | Coupling Size |     | Weight 100' (30.5 m) Without Coupling |     | Coil Diameter 100' (30.5 m) |      | Service/Working Pressure |      | Test Pressure |      | Burst Pressure |      |
|---------------|---------------|-----|---------------|-----|---------------------------------------|-----|-----------------------------|------|--------------------------|------|---------------|------|----------------|------|
|               | Pulg.         | mm. | Pulg.         | mm. | Libras                                | kg. | Pulg.                       | cm.  | PSI                      | kPa  | PSI           | kPa  | PSI            | kPa  |
| 750           | 1.00          | 25  | 1 5/32        | 29  | 9.0                                   | 4.1 | 17.0                        | 43.2 | 300                      | 2070 | 600           | 4140 | 1000           | 6900 |
| 751           | 1.50          | 38  | 1 11/16       | 43  | 13.5                                  | 6.1 | 17.0                        | 43.2 | 300                      | 2070 | 600           | 4140 | 1000           | 6900 |

### TECHNICAL FEATURES – 1" DIAMETER

Length: 30 m  
Burst pressure: 1000 PSI  
Working pressure: 300 PSI

### TECHNICAL FEATURES – 1.5" DIAMETER

Length: 30 m  
Burst pressure: 1000 PSI  
Working pressure: 300 PSI



# Fireflyer Helicopter Water Tank



Scan the QR code and find more information about our product.

Aerodynamic PVC tank for helicopter transport.

USES:

Aerial transport of water, firefighting foam, and potable water to remote areas by helicopter, for wildland firefighting and emergency operations.

DESIGN AND MATERIALS

- Made of high-strength PVC-coated fabric
- Flexible, compact container
- 100 mm (4 in) fill opening
- Shut-off valve at the outlet
- Hose with standard G.T.H. connection and O-ring for secure coupling
- Pear-shaped ring designed to withstand rotation caused by wind during aerial transport

WEIGHT AND DIMENSIONS

| MODEL: FP60  |                     |
|--------------|---------------------|
| Capacity     | 72 U.S. Gal / 273 L |
| Full weight  | 612 lb / 278 Kg     |
| Empty weight | 13.0 lb / 5.9 kg    |

| MODEL: FP110 |                      |
|--------------|----------------------|
| Capacity     | 132 U.S. Gal / 500 L |
| Full weight  | 1115 lb / 507 Kg     |
| Empty weight | 17.0 lb / 7.7 kg     |





## Fixed Jet Nozzle

**USES:**


- 1.5" nozzle with a stable and solid water jet.
- The pressure and stability of the water help reduce operator movement.

**NOZZLE AND OUTLET ORIFICE:**

- Aluminum nozzle
- Interchangeable nozzle head
- Changeable outlet orifice: 1/4", 3/8", and 1/2"
- Inlet: 1.5" (38 mm) BSP




QR: Use your camera or bar code scanner and download the digital PDF version

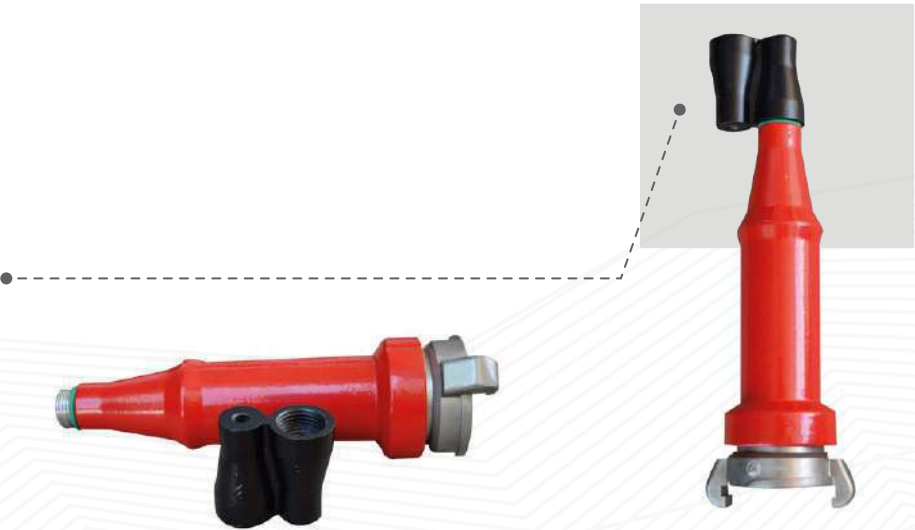



QR: Use your camera or bar code scanner and download the digital PDF version

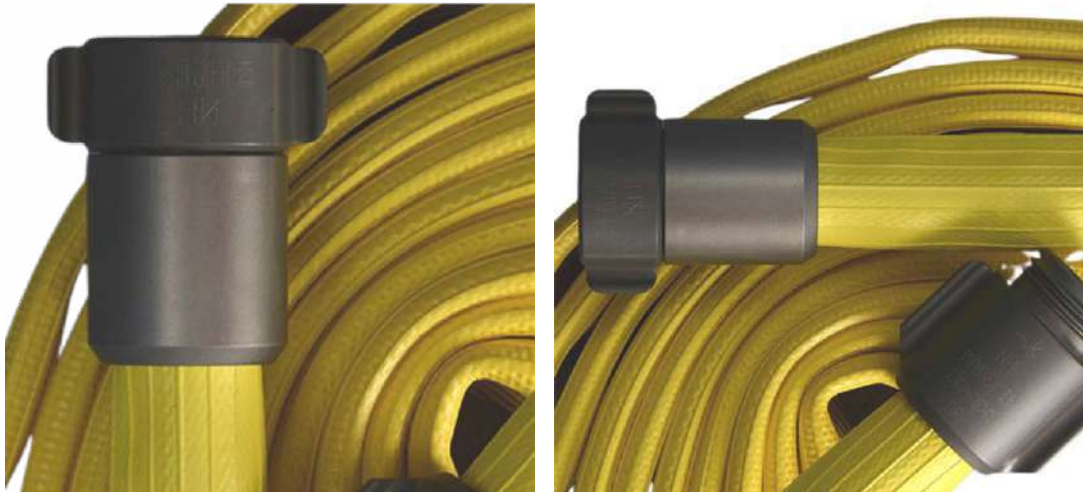

## FLD Forestry Dry Hose

A rubber-covered, layflat hose for forestry fire fighting

### TECHNICAL SPECIFICATIONS:

- Rubber-coated flat hose, specifically designed for wildland firefighting use.
- Available in 3/4" (19 mm) option for increased flexibility.
- Exceeds performance requirements of NFPA 1961 and UL standards.
- Available with both GHT and Baby Merlug® 3/4" QC (patented) fittings.
- The hose is woven with high-quality synthetic yarns and encapsulated in a nitrile rubber matrix. This combination provides strength and flexibility at low temperatures, as well as resistance to abrasion, oils, fuels, chemicals, and offers low pressure loss due to friction.
- Can be used with quick-connect and threaded couplings.
- Exceeds the performance requirements of NFPA 1961 and UL standards.

| HOSE SPEC. | TRADE SIZE |     | BOWL SIZE |     | WEIGHT UN-COUPLED 50' (15.2M) |     | COIL DIAMETER 50' (15.2M) |      | SERVICE PRESSURE |      | PROOF PRESSURE |      | BURST PRESSURE |      |
|------------|------------|-----|-----------|-----|-------------------------------|-----|---------------------------|------|------------------|------|----------------|------|----------------|------|
|            | In.        | mm. | In.       | mm. | Lbs.                          | In. | In.                       | mm.  | PSI              | kPa  | PSI            | kPa  | PSI            | kPa  |
|            | 3/4        | 19  | 1         | 25  | 5,5                           | 2,5 | 12                        | 30,5 | 300              | 2070 | 600            | 4140 | 900            | 6200 |
|            | 1          | 25  | 1 3/16    | 30  | 7                             | 3.2 | 12,5                      | 31,8 | 300              | 2070 | 600            | 4140 | 900            | 6200 |
|            | 1½         | 38  | 1 3/4     | 44  | 11                            | 5   | 12,5                      | 31,8 | 300              | 2070 | 600            | 4140 | 900            | 6200 |





## Floating Pump Kit



Scan the QR code  
and find more  
information about  
our product.

The kit, consisting of a floating pump and discharge hose, with an optional water tank, allows deploying the pump over a water source (pool, tank, or river) for direct fire suppression.

The pump provides high pressure, exceeding 13 bar, and is easy to operate as it is self-priming and draws water directly from its bottom without the need for large hoses. It has sufficient pressure to operate with hose lengths exceeding 200 meters.

Self-supporting water tanks: capacities of 1,000 / 5,000 / 10,000 liters.

### COMPONENTES:

FT-200-4B Pump: High-pressure floating pump with a 2- or 4-stroke engine.

Performance: Maximum pressure: 13 bar / Maximum flow rate: 300 liters per minute.

50 meters of hose.

Flow-adjustable nozzle.



## Foam Backpack



QR: Use your camera or bar code scanner and download the digital PDF version

PVC canvas bag with heat-sealed seams, reinforced bottom, and internal baffle. The filling port has a diameter of 120 mm. At the bottom, it features a 1/2" threaded outlet connection.

Its empty dimensions are 50 cm wide by 61 cm high, with a total capacity of 20 liters. It also includes a padded harness with adjustable straps for added comfort, and a top handle for easy transport.



|            |            |
|------------|------------|
| Material   | PVC        |
| Capacity   | 20 l       |
| Dimensions | 50 x 61 cm |
| Weight     | 0,920 kg   |



## Foldable water tank

### USES:

- Designed for storing water intended for supply or direct firefighting operations in remote or hard-to-access areas where resupply options are limited.
- Easy to assemble and transport.
- Allows the availability of large water volumes without relying on tanker trucks.
- Can be interconnected for structural firefighting operations, serving as a water source for all fire engines.
- Enables refilling from any type of mobile tank or water tender, providing greater operational autonomy.

### DESIGN AND MATERIALS

- Built with an aluminum frame and hinges that allow folding.
- The liner is made of polyester fabric coated with PVC.
- Can be fitted with the necessary connections for portable fire pumps for filling or discharge.
- Top-open design allows refilling with Bambi Buckets.
- The liner is supported at the upper edge of the aluminum frame using a 5 mm multifilament rope.

### CAPACITY

- Capacity 10,000 liters: 4 m long × 3 m wide × 0.75 m high.
- Capacity 5,000 liters: 2.6 m long × 2 m wide × 1 m high.
- Storage capacity ranges from 1,000 to 10,000 liters.



QR: Use your camera or bar code scanner and download the digital PDF version





## ForestGuard II Dry Hose

Available in 1" and 1.5"

USES:

Hose for forestry use, fully synthetic, non-self-wetting, approved by ULC.

DESIGN AND MATERIALS

Single-jacket, synthetic fire hose resistant to chemical products, petroleum derivatives, ozone, UV rays, hydrolysis, decomposition, and mold.

Remains flexible down to -55°C (-65°F).

Lightweight, durable, and versatile, with Mertex® lining that reduces friction loss.

Available with Permatek HPTM treatment for abrasion, moisture, and mold resistance.

Can be used with quick-connect and threaded couplings.

CERTIFICATIONS

Meets all performance requirements of NFPA 1960 (1961), Canadian Standard ULC S518.1.11, Factory Mutual, and USDA Specification 5100-187C Type 1 for 1" (25 mm) and 1½" (38 mm) hoses.



QR: Use your camera or bar code scanner and download the digital PDF version

TECHNICAL SPECIFICATIONS  
1" DIAMETER:

|                  |          |
|------------------|----------|
| LENGTH           | 30 mts   |
| BURST PRESSURE   | 1000 PSI |
| WORKING PRESSURE | 300 PSI  |

TECHNICAL SPECIFICATIONS  
1.5" DIAMETER:

|                  |          |
|------------------|----------|
| LENGTH           | 30 mts.  |
| BURST PRESSURE   | 1000 PSI |
| WORKING PRESSURE | 300 PSI  |

| HOSE SPEC. | TRADE SIZE |     | BOWL SIZE |     | WEIGHT UN-COUPLED 100' (30.5M) |     | COIL DIAMETER 100' (30.5M) |      | SERVICE PRESSURE |      | PROOF PRESSURE |      | BURST PRESSURE |      |
|------------|------------|-----|-----------|-----|--------------------------------|-----|----------------------------|------|------------------|------|----------------|------|----------------|------|
|            | In.        | mm. | In.       | mm. | Lbs                            | Kg. | In.                        | Cm.  | PSI              | kPa  | PSI            | kPa  | PSI            | kPa  |
| 704        | 1          | 2,5 | 1 5/32    | 29  | 8                              | 3,6 | 14                         | 35,6 | 300              | 2070 | 600            | 4140 | 1000           | 6900 |
| 705        | 1,5        | 38  | 1 11/16   | 43  | 11,8                           | 5,4 | 14                         | 35,6 | 300              | 2070 | 600            | 4140 | 1000           | 6900 |



# Halos W-EBD – Wildfire Escape Breathing Device

Ultralight, compact open-circuit compressed air system designed for integration into water backpacks.



Scan the QR code and find more information about our product.

## USOS:


- Escape from wildland fires
- Evacuation in contaminated atmospheres
- Firefighting and rescue operations
- Ground emergencies – short-duration air supply
- Reusable autonomy for training. Can be used in training sessions and drills, allowing frontline personnel to become familiar with the equipment under controlled conditions without consuming additional resources.

## DESIGN AND MATERIALS

- Storage Cylinder
- Built with Type 3 or higher composite materials:
  - Internal aluminum liner
  - Full carbon fiber overwrap
- Design focused on:
  - High pressure resistance
  - Weight reduction
  - Ergonomics during extended use
- Compact design compatible with standard wildland firefighting backpack pockets
- Regulation System
- Two-stage configuration:
  - First stage: high-pressure regulator connected to the cylinder
  - Second stage: demand-type metering valve

## Functional design oriented toward stable air delivery in any position (upright, tilted, or crawling) and optimized air consumption

- The interconnection is made via a medium-pressure flexible hose, allowing full head rotation without restricting movement
- The valve design is optimized to:
  - Prevent accidental free flow
  - Minimize inhalation resistance under physical exertion
- The user interface consists of a food-grade/medical-grade silicone ergonomic mouthpiece, designed to ensure a firm, stable bite under physical stress

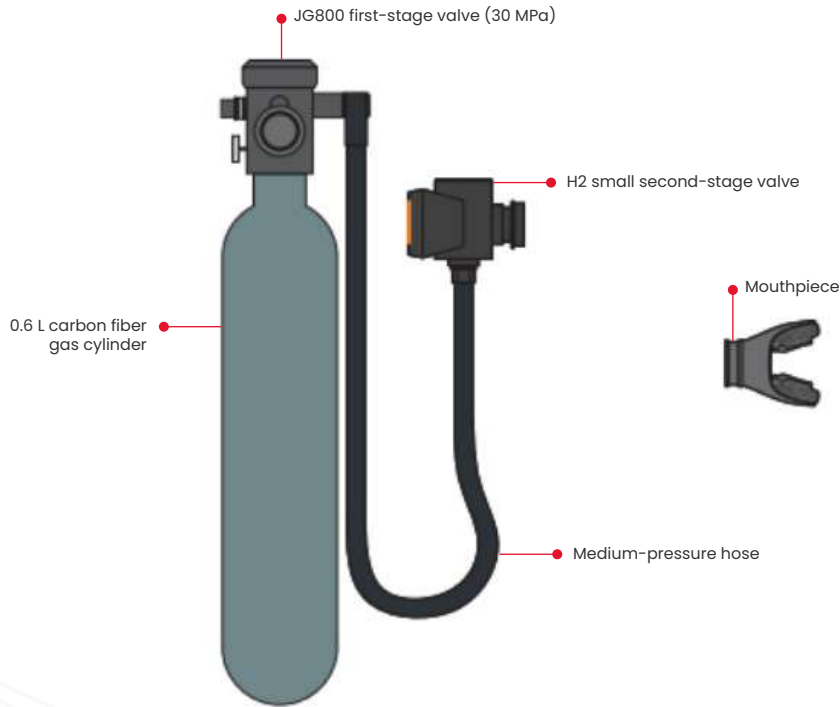

TECHNICAL SPECIFICATIONS

| PARAMETER                    | VALUE / REQUIREMENT                        |
|------------------------------|--------------------------------------------|
| Cylinder capacity            | 0,55 – 0,65 L                              |
| Service pressure             | ≥ 300 BAR / 4,500 PSI / 30 MPa             |
| Cylinder weight (empty)      | Max. 0,84 kg                               |
| Outer diameter               | Max. 78 mm                                 |
| Total length (without valve) | Max. 253 mm                                |
| Breathing autonomy           | Min. 70 breaths / 5–8 minutes              |
| Regulation                   | Two-stage system (high pressure + demand)  |
| Overpressure safety          | Burst disc or anti-explosion valve         |
| Refill compatibility         | 8 mm male Quick Connect / Firefighter SCBA |
| Certifications               | DOT, EN, ISO or aviation/diving equivalent |

COMPONENTES

- JG800 first-stage valve (30 MPa)
- 0.6 L carbon fiber gas cylinder
- Medium-pressure hose
- H2 small second-stage valve
- Mouthpiece





## Hose Reel

Designed to roll hoses on the ground easily, quickly, and comfortably. Compatible with hoses up to 75 mm (3") in diameter and a maximum length of 30 m (100 ft). Hoses can be rolled in a Dutch style or folded individually in approximately 10 seconds, optimizing the process and making the operator's work easier.

### DESIGN:

The magnetically attached handle to the rolling fork ensures effortless hose release when tightly rolled and folded in the center.

Its foldable support foot provides quick and safe parking in the work area, offering stability during use.

The non-pneumatic tires ensure the roller requires no maintenance, offering greater durability and operational efficiency.

### ACCESSORIES:

- Extendable handle.
- Support stand to assist in hose removal.
- Support foot (optional).
- Adjustable hose guide for hoses with couplings.

### TECHNICAL SPECIFICATIONS:

|                              |                     |
|------------------------------|---------------------|
| MATERIAL                     | Steel               |
| DIMENSIONS (WITHOUT HANDLE): | 1.400 x 430 mm.     |
| DIMENSIONS (WITH HANDLE):    | 750 x 430 x 210 mm. |
| WEIGHT:                      | 11.6 kg.            |



QR: Use your camera or bar code scanner and download the digital PDF version



# Hose splitters and water thieves

## HOSE SPLITTERS

Hose splitters, available with or without a shut-off valve, allow full control of water flow. They are ideal for dividing one hose line into two or combining two lines into one, ensuring efficient water distribution as needed.

### MANUFACTURING AND CHARACTERISTICS:

- Hose splitters are made of aluminum alloy, providing high strength. They withstand tandem working pressures and are highly resistant to corrosion, ensuring durability and performance under demanding conditions.



QR: Use your camera or bar code scanner and download the digital PDF version



# Hose Splitters and Water Thieves

## WATER THIEVES

Water thieves are used to connect to a hose line and extract water for various uses, such as supplying smaller hoses for firefighting, sprinklers, filling backpack tanks, among others. They are available in versions with or without a shut-off valve and with or without a bypass hose, adapting to different operational needs.



QR: Use your camera or bar code scanner and download the digital PDF version







## Inforest Nozzle 301

### USES:

1" nozzle with a simple and durable design, resistant to high temperatures and impacts. It features a rotating head that allows easy adjustment of the flow rate and the desired stream or spray pattern by simply turning the nozzle.

### CONSTRUCTION:

The nozzle is made of anodized aluminum, providing high strength and durability. It requires minimal maintenance, ensuring prolonged and efficient use.

### INLET AND FLOW RATE:

- Inlet: 1" (25 mm) BSP
- Approximate flow rate ranges from 37 to 115 LPM, with a 1" capacity that ensures excellent performance during operation.

### ROTATING NOZZLE:

Equipped with a rotating head that allows varying the flow according to the type of stream or mist required, providing greater versatility in use.



QR: Use your camera or bar code scanner and download the digital PDF version



## Inforest Nozzle 309

### USES:

1" nozzle with a simple and durable design, resistant to high temperatures and impacts. It features a rotating head that allows easy adjustment of the flow rate and the desired stream or spray pattern by simply turning the nozzle.

### CONSTRUCTION:

The nozzle is made of anodized aluminum, providing high strength and durability. It requires minimal maintenance, ensuring prolonged and efficient use.

### INLET AND FLOW RATE:

- Inlet: 1" (25 mm) BSP
- Approximate flow rate ranges from 37 to 115 LPM, with a 1" capacity that ensures excellent performance during operation.

### ROTATING NOZZLE:

Equipped with a rotating head that allows varying the flow according to the type of stream or mist required, providing greater versatility in use.



QR: Use your camera or bar code scanner and download the digital PDF version



QR: Use your camera or bar code scanner and download the digital PDF version

# Inforest Nozzle 360

## USES:

The 1" nozzle with shut-off and adjustable flow offers up to 4 different flow settings, allowing greater effectiveness in various applications. Its design optimizes water use, minimizing breakage caused by jet impact.

Thanks to its adjustment capability, it can switch from a fine mist to a full jet with a simple ¼-turn of the nozzle. Its resistance to pressures up to 40 BAR makes it ideal for use on high-pressure hose lines and reels.

## CONSTRUCTION:

The nozzle is made of anodized aluminum, providing high strength and durability. Key components such as the shut-off valve and rotating teeth are made of stainless steel, ensuring excellent corrosion resistance. Thanks to these materials, the nozzle requires minimal maintenance and guarantees optimal performance over time, even under demanding conditions.

## INLET:

- Inlet: 1" (25 mm) BSP
- Selectable flow rates: 19–37–90–150 LPM







## Inforest Nozzle 366



QR: Use your camera or bar code scanner and download the digital PDF version

### USES:

The 1.5" nozzle with shut-off and adjustable flow offers up to 4 different flow settings, allowing greater effectiveness in various applications. Its design optimizes water use, minimizing breakage caused by jet impact.

Thanks to its adjustment capability, it can switch from a fine mist to a full jet with a simple ¼-turn of the nozzle. It is also designed for use with hoses in extinguishing and cooling operations.

### CONSTRUCTION:

Made of anodized aluminum, this structure allows efficient application of AFFF-type foam. Its design requires minimal maintenance, as the shut-off valve, stainless steel rotating teeth, and all components are highly resistant to corrosion.

### INLET AND FLOW RATE:

- Inlet: 1.5" (38 mm) BSP
- Selectable flow rates: 115–230–360–475 LPM



# Inforest Nozzle 560

## High-Pressure Trigger Nozzle

### USES:


Wildland firefighting and fire control operations, for tasks requiring a high-pressure jet with immediate flow shut-off via trigger.

### DESIGN AND MATERIALS

- Pistol-style design with ergonomic grip and shut-off trigger
- High-strength alloy construction
- A system of rotating teeth made of stainless steel for jet generation
- Suitable for high pressure (PN40)
- Components engineered for continuous operation and intensive use
- Enhanced durability and wear resistance
- Inlet: 1 in (25 mm) BSP
- Selectable flow rates: 19, 37, 90, 150 LPM



Scan the QR code and find more information about our product.

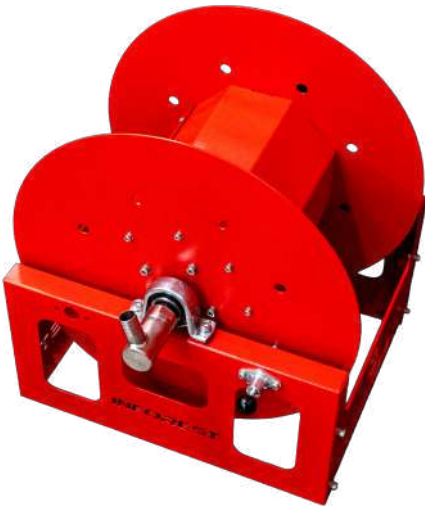

## Inforest Reel V3

### DESIGN AND FEATURES

The practicality of the INFOREST reel is based on its simple and functional design. It incorporates efficient devices, such as the multi-position automatic locking system, which facilitates operation and ensures safe and efficient handling during use.

The compact INFOREST reel system allows for the incorporation of up to 50 m of hose reel for hoses up to 1". Thanks to the axle mounted on bearings, smooth and continuous movement is achieved, minimizing physical strain when operating the manual crank. Additionally, upon request, a pneumatic or electric motor can be incorporated, further facilitating hose retrieval.

### MATERIAL

- The INFOREST reel features a textured baked polyester powder-coated finish, ensuring high durability even under adverse weather conditions, providing resistance to wear and corrosion over time.

### TECHNICAL SPECIFICATIONS:

|         |          |
|---------|----------|
| WEIGHT: | 24 Kg.   |
| WIDTH:  | 65 cm.   |
| LENGTH: | 54 cm.   |
| HEIGHT: | 58,5 cm. |



QR: Use your camera or bar code scanner and download the digital PDF version





# IRIS: Standalone Extinguishing Module

## USES

Modular helitransportable system designed for wildland fire suppression operations.

## TECHNICAL SPECIFICATIONS

Air and ground transport capability: modular, compact design adaptable to various helicopters and pickup trucks.

Rapid crew deployment: designed for 5–6 firefighters during the critical first hours of the fire.

Immediate water autonomy: fixed main tank of 400 l allows operations to begin without waiting for resupply.

It features an inflatable tank with a capacity of 3,000 liters.  
A folding system for mounting the upper tank

Integrated portable pumps (primary and secondary): ensure pressure, continuous flow, and the ability to form relay pumping chains.

Independent leveling system: ensures stability and safe operation on uneven terrain.

Removable caps

## FEATURES

Built-in lighting and beacon system (customizable per client request).



● Complete wildland equipment set\*

### OPERABLE AS A BASE STATION:

Generator, option to add solar panels, radios, compressor, weather instrumentation.

### CONFIGURABLE STORAGE:

Space for accessories, fuel, meals/lunchboxes, or other customer-specific needs.

### COMPONENTS

- WICK XP4 -13 PUMPER
- WICK 100M - FIRE PUMPER
- Fixed 450-liter Tank (FRP)
- Auxiliary Refill Tank
- 10 Hoses of 25 meters each

### CUSTOMIZABLE SETUP:

Configurable options tailored to the specific needs of each brigade or client.

### TOOLS:

- Short hose (fire swatter): 3 units
- Derki combination rake: 2 units
- Pulaski Tool: 1 unit
- McLeod Rake: 1 unit
- Wildland shovel: 1 unit
- Drip torch 5l: 1 unit
- Drip torch 1l: 1 unit
- INFOREST traditional connection water backpacks: 3 units
- First Aid Kit

### COLOR:

Standard: red and black. Custom colors available upon request.

- Nozzle kit: fixed stream + inforest 360 nozzle
- Electric generator
- Battery
- Radio Charging Dock
- Area lights (cool white led)
- Strobe lights



|             |                                       |                           |                                     |
|-------------|---------------------------------------|---------------------------|-------------------------------------|
| Dimensions: | Height 1350 x Width 1450 x Depth 1300 |                           |                                     |
| Weight:     | Structure only:                       | Structure with equipment: | Structure with equipment And water: |
|             | 300 KG                                | 460 KG                    | Approx. 860 kg                      |



QR: Use your camera or bar code scanner and download the digital PDF version

## Light Water Backpack

This is a water backpack designed for wildland firefighting.

### DESIGN AND MATERIALS

It consists of a highly resistant PVC bag with an internal baffle system.

Following our ongoing drive for improvement, we developed a quick-connect valve with a 1/4 turn at the bag outlet, allowing the hose to be attached or removed even when the bag is full without losing its contents.

**HOSE:** The anti-kink hose includes internal stainless-steel fittings suitable for use with foam and retardant.

**DOUBLE-ACTION NOZZLE:** Made of stainless steel, this double-action nozzle can be used from a full jet with a reach of 12 meters to a mist with a reach of 3 meters.

The materials used in its manufacture are resistant to corrosion and the buildup of mineral residues.

### TECHNICAL SPECIFICATIONS

|                          |                              |
|--------------------------|------------------------------|
| Capacity                 | 18 a 20 liters               |
| Dimensions               | 610 mm x 500 mm              |
| Approx. Range            | 12 m full jet – 3 m mist jet |
| Maximum Discharge Volume | 125 cm³                      |
| Dry Weight               | 2 kg                         |
| Nozzle                   | Double Action                |



## DOUBLE-ACTION NOZZLE

- The nozzle has been redesigned to reduce weight and improve aesthetics and ergonomics, adding a movable handle on the main body to enhance grip.
- The tip has also been redesigned, achieving a significant improvement in the water jet and the resulting spray.
- The nozzle can be used with a full jet reaching up to 12 meters or as a mist with a reach of 3 meters.

## HOSE

- The anti-kink hose includes internal stainless-steel fittings suitable for the use of foam and retardant.



The padded harness is easily adjustable to distribute weight evenly. Along with attachment straps for communication equipment and carabiners for hanging the nozzle, it allows hands-free operation and full freedom of movement for climbing, jumping, and walking across any terrain.





## Mandrel Service

### BY BINDING

The binding service guarantees a secure coupling on hoses, generally of the Storz type, from 1" diameter and up, with no limitations on the size of the coupling to be bound.

The procedure is performed with stainless materials. However, when inserting the tail of the coupling inside the hose, the water passage section is reduced compared to the hose diameter, which results in greater pressure and flow loss.

### BY EXPANSION RING

The mandrel service is carried out using copper alloy expansion rings, available for hose diameters of 1", 1 1/2", 1 3/4", 2", and 2 1/2".

The expansion ring method provides the best flow rate and pressure for water passing through the hose, as it does not reduce the passage section.



QR: Use your camera or bar code scanner and download the digital PDF version



**INFOREST SRL:** [www.inforest.com.ar](http://www.inforest.com.ar)  
[ventas@inforest.com.ar](mailto:ventas@inforest.com.ar) | [comex@inforest.com.ar](mailto:comex@inforest.com.ar)  
**INFOREST IBÉRICA:** [www.inforestiberica.com](http://www.inforestiberica.com)  
[info@inforestiberica.com](mailto:info@inforestiberica.com)

# Mapache extinguishing Backpack

Water backpack with a square design that maintains its shape even during and after filling.



Scan the QR code and find more information about our product.

## INCLUDES

- Water backpack
- Double-action stainless steel nozzle
- Quick-connect bronze coupling
- Side pockets for torches or water bottles
- Padded waist belt
- Front pocket
- Reflective trim
- Top-loading fill cap
- Capacity: **25 liters maximum**

## DESIGN AND MATERIALS

The only flexible fire suppression backpack on the market, with a square design and top-loading system. It allows:

- Being filled by a single person thanks to the top-loading design.
- Maintaining its shape during and after filling.

- Developed to provide comfort during long working shifts, it incorporates functional improvements that optimize ergonomics, equipment organization, and field safety.
- Internal water bag fitted with internal anti-surge baffles.
- Made of polyamide fabric (Nylon) with PU coating, resistant to wear and abrasion, with flame-retardant properties under NFPA 701 Standard. It features plastic trims with reflective material at main seams for greater visibility.





## POCKETS

- Fully enclosed front pocket with flap and zipper for safe transport of hose and nozzle.
- Wing-style side pockets with internal zippered pocket for batteries or other items.

## NOZZLE TRANSPORT

- MOLLE system on the sides and hip belt that allows adjusting the position of the removable carabiner according to user preference.
- Lateral velcro strap for transporting the double-action nozzle on the side of the backpack.

## ADJUSTMENT SYSTEM

- Three adjustable fastening systems:
  - Abdominal belt
  - Chest adjustment
  - Adjustable shoulder straps
- All sliders feature ergonomic pulls. The straps incorporate velcro to secure loose ends and avoid interference during use.

## WATER BAG

- Heavy-duty PVC inner liner with wave breakers. Easily replaceable without tools. Top-loading opening with filter and handles to facilitate filling.

## AVAILABLE COLORS:



| DIMENSIONS | Full      | Empty  |
|------------|-----------|--------|
| Height     | 600 mm    | 600 mm |
| Width      | 300 mm    | 470 mm |
| Depth      | 250 mm    | 180 mm |
| Capacity   | 25 liters |        |

|                                              |        |
|----------------------------------------------|--------|
| Backpack only weight                         | 1.8 kg |
| Complete backpack weight with lance and hose | 2.8 kg |



- Stainless steel nozzle, low-maintenance, redesigned to reduce weight and improve aesthetics and ergonomics. Features a mobile handle on the main tube for easier grip.
- The tip has also been redesigned, achieving improvements in both full jet and mist spray.
- The materials used in its manufacture are not susceptible to corrosion or limescale buildup.
- The nozzle maintains its double-action system, allowing selection between a full jet with a range of up to **12 meters** and a mist with a range of up to **3 meters**.

- Anti-kink hose featuring internal stainless steel studs, allowing it to be used with foam concentrate and fire retardant.



# Myti-Flo® Hose

## USES

Wildland fire hose, resistant and lightweight.

## DESIGN & MATERIALS

- Single-jacket, fully synthetic.
- Mertex lining: provides low friction loss for maximum flow and superior adhesion for long service life.
- Permatek HP treatment for abrasion resistance, moisture absorption reduction, and mold protection.
- Resistant to chemicals, petroleum-based products, ozone, UV exposure, hydrolysis, decomposition, and mildew.
- Remains flexible down to -55°C (-65°F).
- GHT couplings.
- Used together with a water thief.

## CERTIFICATIONS

Meets or exceeds all performance requirements of NFPA 1961, Underwriters Laboratories & Factory Mutual.



QR: Use your camera or bar code scanner and download the digital PDF version

| Espec. | Hose Diameter |     | Coupling Size |     | Weight 50' (15.2 m) Without Coupling: |     | Coil Diameter 50' (15.2 m): |      | Service/Test Pressure: |      | Proof Pressure: |      | Burst Pressure: |      |
|--------|---------------|-----|---------------|-----|---------------------------------------|-----|-----------------------------|------|------------------------|------|-----------------|------|-----------------|------|
|        | Pulg.         | mm. | Pulg.         | mm. | Lb                                    | kg. | Pulg.                       | cm.  | PSI                    | kPa  | PSI             | kPa  | PSI             | kPa  |
| 719    | 3/4           | 19  | N/A           | N/A | 1.7                                   | 0.8 | 8.0                         | 20.3 | 250                    | 1725 | 500             | 3450 | 750             | 5175 |





## Portable Fire Attack Kit



Scan the QR code  
and find more  
information about  
our product.

The portable fire attack kit is a practical solution with great autonomy for hard-to-reach areas.

### COMPONENTS:

Wick 100-4H motor pump (4-stroke, 1 stage) with a maximum pressure of 7 bar / 265 liters per minute.

Inflatable water tank available in 340l / 410l / 570l / 1120l

### Available hoses:

50 m Forestguard II 1.5 (38 mm)

25 m Forestguard II 1 (25 mm)

25 m Firebreak II 1.5 (38 mm)

25 m Firebreak II 1 (25 mm)

Suction hose + Valve with filter

Adjustable flow 360 nozzle

Wick 100 M Portable Pump (2-stroke or 4-stroke engine). Max pressure: 7 bar Max flow: 265 liters per minute

Or Wick 250 Portable Pump. Pressure: 12 bar / 340 liters per minute



QR: Use your camera or bar code scanner and download the digital PDF version

## Portable Hose Washer

Designed to clean hose lines in a simple, efficient, and effective way before leaving the work area. The washer uses water supplied by a pump, connected via a standard 1.5" inlet, and is powered by a 28V interchangeable standard battery compatible with Milwaukee or Genesis brands. This device does not require any special accessories.

### USES:

The device is equipped with two long-bristle brushes, independently powered by motors. The bristles, along with the fixed spacing between the brushes, maintain constant pressure on the hose surface, ensuring optimal cleaning.

When the hose is inserted into the washing channel, the bristles catch the coupling, and the brushes automatically pull the hose through the machine, allowing a single operator to use the equipment easily and efficiently.

The stainless-steel frame allows secure handling from any direction and offers a practical option for storage when not in use.

### ACCESSORIES:

- Unit with rubber wheels and retractable handle.
- Stainless steel tubular frame for easy storage, transport, and handling.
- Retractable handle.

### MATERIALS:

The exterior features a compact aluminum housing covered with double-sided diamond plates.

### TECHNICAL SPECIFICATIONS:

|             |                       |
|-------------|-----------------------|
| Dimensions: | 59 cm x 55 cm x 33 cm |
| Weight:     | 30 kg                 |

- Two rotating brushes for intensive cleaning.
- Washing channel for hoses with couplings up to 25 m.
- Extendable stabilizers.
- Four spray nozzles for washing and rinsing.







## Quick-release water backpack

The most comfortable water backpack on the market. Our design was the first to introduce this ergonomic concept, allowing long working hours and long-distance walking with minimal effort.

It consists of a highly resistant inner PVC waterproof liner that can be easily replaced without tools in case of punctures. It has a top loading cap with a filter and handles to maintain a horizontal position while filling.

The outer shell, which acts as the containment structure, is made of nylon fabric with PU coating, increasing resistance to wear and abrasion while reducing weight – maintaining the essential flame-retardant property under NFPA 701 standards.

Following our constant drive for innovation, we developed a quick-connect valve with a 1/4 turn at the outlet of the bag, allowing the hose to be removed or attached even when the bag is full without losing its contents.

**HOSE:** The anti-kink hose features internal stainless-steel fittings, suitable for the use of foam or retardant.

**DOUBLE-ACTION NOZZLE:** Made of stainless steel, this double-action nozzle can be used from full jet mode with a reach of up to 12 meters, to a mist mode with a reach of 3 meters. It was redesigned to reduce weight and improve aesthetics and ergonomics, adding a mobile handle on the main body for better grip. The tip was also modified to achieve a better water jet and spray performance.

The materials used in its manufacture are resistant to corrosion and the buildup of mineral residues.

Removable straps at the back and waist allow the nozzle position to be adjusted for user comfort.



QR: Use your camera or bar code scanner and download the digital PDF version

|                          |                              |
|--------------------------|------------------------------|
| Capacity                 | 18 to 20 liters.             |
| Dimensions               | 650 mm x 450 mm              |
| Approx. Range            | 12 m full jet – 3 m mist jet |
| Maximum Discharge Volume | 125 cm³.                     |
| Dry Weight               | 2,3 kg                       |
| Nozzle                   | Double Action                |



## DOUBLE-ACTION NOZZLE

- Stainless steel nozzle with minimal maintenance, redesigned to reduce weight and improve aesthetics and ergonomics, now featuring a movable handle on the main body for better grip.
- The tip has also been redesigned, achieving a significant improvement in water jet and spray performance.
- The new materials used in its manufacture are resistant to corrosion and buildup of mineral deposits. The nozzle remains double-action, allowing selection from a full jet with a reach of 12 meters to a mist with a reach of 3 meters.



Optional: Carry bag available for storage and transport.



**Certification  
NFPA 701 –  
Flame  
Retardant  
Property**

## HOSE

- The anti-kink hose has also been improved in composition, now incorporating internal stainless-steel fittings for foam and retardant use.



## HARNESS

- The padded, easily adjustable harness evenly distributes weight. Along with communication gear straps and carabiners to hang the nozzle, it allows hands-free operation and full movement freedom for climbing, jumping, or walking in any terrain.

## AVAILABLE COLORS YELLOW/BLUE – RED/BLUE





## Rigid extinguishing backpack



QR: Use your camera or bar code scanner and download the digital PDF version

Rigid tank extinguisher with a 17-liter capacity, equipped with a long-range nozzle (8–12 m), anti-kink hose, padded straps, and an adjustable belt for greater comfort and ease of use.

The backpack features a high-resistance tank, ideal for forest firefighting tasks. Its ergonomic design, along with a long-range nozzle, ensures high efficiency in fire suppression operations.

### DESIGN:

Its design includes a specially engineered nozzle to optimize the water jet and spray reach.

It features a simple mounting system that facilitates both cleaning and maintenance. Additionally, it includes an ergonomic tank with a hermetic locking cap and a decompression valve. The setup includes a hose holder, ideal for transport, as well as padded, adjustable straps and a waist belt for enhanced comfort.

### TECHNICAL SPECIFICATIONS

|            |            |
|------------|------------|
| Capacity   | 17,5 L     |
| Dimensions | 50 x 61 cm |

\*Not available in Argentina.



## Self-Protection Nozzle



QR: Use your camera or bar code scanner and download the digital PDF version

The self-protection nozzle was specially designed to provide safety and protection to people and assets threatened by fire in entrapment situations. It provides protection against direct contact, radiant heat, and convective heat through a water spray with foam additive that can exceed 6 meters (20 ft) in height and 10 meters (33 ft) in width.

### TECHNICAL SPECIFICATIONS


|                                                                                                 |                                                                        |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| NOZZLE BODY MATERIAL                                                                            | Manufactured in duro-aluminum, sulfuric anodized.                      |
| SHIELD MATERIAL                                                                                 | Manufactured in stainless steel.                                       |
| TANK ASSEMBLY MATERIAL                                                                          | Manufactured in aluminum.                                              |
| TANK CAPACITY                                                                                   | 9 liters.                                                              |
| TANK HANDLE TYPE                                                                                | Technopolymer.                                                         |
| TANK FILLER CAP                                                                                 | Technopolymer with particle filter and overpressure valve.             |
| WEIGHT <ul style="list-style-type: none"><li>• TANK EMPTY:</li><li>• TANK FULL (9 L):</li></ul> | <ul style="list-style-type: none"><li>• 7 Kg</li><li>• 16 Kg</li></ul> |
| DIMENSIONS                                                                                      | (L) 400 mm x (H) 320 mm x (A) 200 mm                                   |



**TECHNICAL FEATURES**

|                                                                                                   |                                                                           |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Material of lance body                                                                            | Manufactured in hard-anodized duralumin.                                  |
| Material of projection shield                                                                     | Manufactured in stainless steel.                                          |
| Material of tank assembly                                                                         | Manufactured in aluminum.                                                 |
| Tank capacity                                                                                     | 9 liters.                                                                 |
| Tank filler cap                                                                                   | Technopolymer with particle filter and overpressure valve.                |
| Weight <ul style="list-style-type: none"><li>• Tank empty:</li><li>• Tank filled (9 L):</li></ul> | 7 kg<br>16 kg                                                             |
| Dimensions                                                                                        | (L) 400 mm x (H) 320 mm x (W) 200 mm                                      |
| Connection system integrated into lance body                                                      | Racor Barcelona UNE-23400 DN25 with 360° knurled rotation.                |
| Reference pressure (RP)                                                                           | 6 bar                                                                     |
| Nominal pressure (NP)                                                                             | 16 bar                                                                    |
| Burst pressure (BP)                                                                               | +40 bar                                                                   |
| Recommended operating pressure range                                                              | 30 bar at high pressure and 12 bar at low pressure, delivering 300 l/min. |
| Geolocation system (Optional)                                                                     | Mobile geolocation system protected with fire-resistant cover.            |

| PUMP TRUCK PRESSURE | LITERS PER MINUTE | BAR |
|---------------------|-------------------|-----|
| 5                   | 165               | 5   |
| 10                  | 204               | 10  |
| 15                  | 238               | 15  |
| 20                  | 265               | 20  |
| 25                  | 287               | 25  |
| 30                  | 307               | 30  |
| 35                  | 329               | 35  |
| 40                  | 353               | 40  |
| 45                  | 365               | 45  |
| 50                  | 380               | 50  |

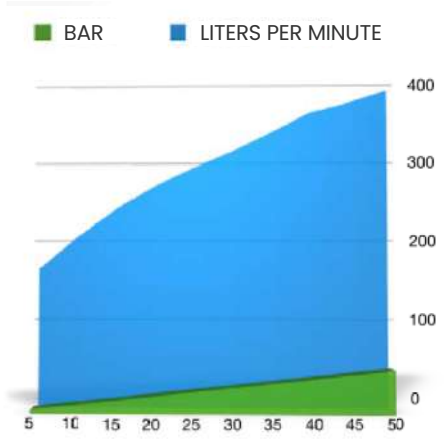



# Self-supporting water tank



QR: Use your camera or bar code scanner and download the digital PDF version

## USES

- Designed for storing water intended for supply or direct firefighting operations in remote or hard-to-access areas, without relying on tanker trucks.
- Ideal for areas with limited resupply capacity.

## DESIGN AND MATERIALS

- Easy to assemble and transport.
- Constructed with polyester fabric coated with PVC.
- Can be equipped with the necessary fittings to connect portable fire pumps for filling or discharge operations.
- Top-open design allows for easy refilling using Bambi Buckets.
- Low-volume open tanks maintain their vertical position autonomously, allowing for quick refilling from any mobile tank or water tender.

## TECHNICAL SPECIFICATIONS

|          |                          |
|----------|--------------------------|
| Capacity | From 1,000 L to 24,000 L |
| Height   | From 102 cm to 137 cm.   |





## Semi-Rigid Hose for Reel



QR: Use your camera or bar code scanner and download the digital PDF version

### USES:

— This vulcanized rubber hose with a textile reinforcement core offers high resistance to cuts and abrasions, even under heavy dragging and friction. It also withstands kinks or collapses that may occur during firefighting operations without compromising its functionality.

— It has a low pressure loss coefficient, ensuring optimal performance during use.

— Ideal for use on hot surfaces and capable of withstanding working pressures up to 20 BAR.

— The hose has a 1" diameter and is equipped with crimped female and male fittings. Available in lengths of 25 and 50 meters.







# Skid Unit Madrid - 4 Stage Pump



Scan the QR code  
and find more  
information about  
our product.


### USES:

- Firefighting and fire control operations using low-pressure systems.
- Water supply and delivery via a centrifugal motor pump.
- Use in pickup trucks and rapid-response vehicles.
- Water intake from external sources using a suction kit.
- Use with compatible foaming agents.
- Safe transport of water during transit thanks to the wave-breaking system.

### DESIGN AND MATERIALS:

- T-shaped or L-shaped tank designed to fit the pickup truck bed and wheel wells, maintaining a low center of gravity.
- Tank capacity: 400 liters.
- Monolithic construction in composite material reinforced with polyester and Kevlar, 6.5 mm thick.
- Structure with full chemical and mechanical bonding for high resistance to impacts and internal pressures.
- High-density polyurethane bottom reinforcements to absorb stress and vibrations.
- Bottom designed for handling by a "bull-type" forklift, allowing for quick installation and removal.
- Equipped with a Ø 350 mm top manhole, overflow, fill inlet, and optical level gauge.
- Includes overflow pipe, pump feed, fill, and drain with ball valve, and internal baffles.
- Frame made of folded steel sheet with cataphoresis anti-corrosion treatment.
- Control panel with hour meter, pressure gauge, emergency stop, lighting, and Barcelona discharge outlets.
- 6-meter suction kit with foot valve, Storz coupling, and check valve.

Performance Correction Standard Correction according to SAE J1349; 15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg.

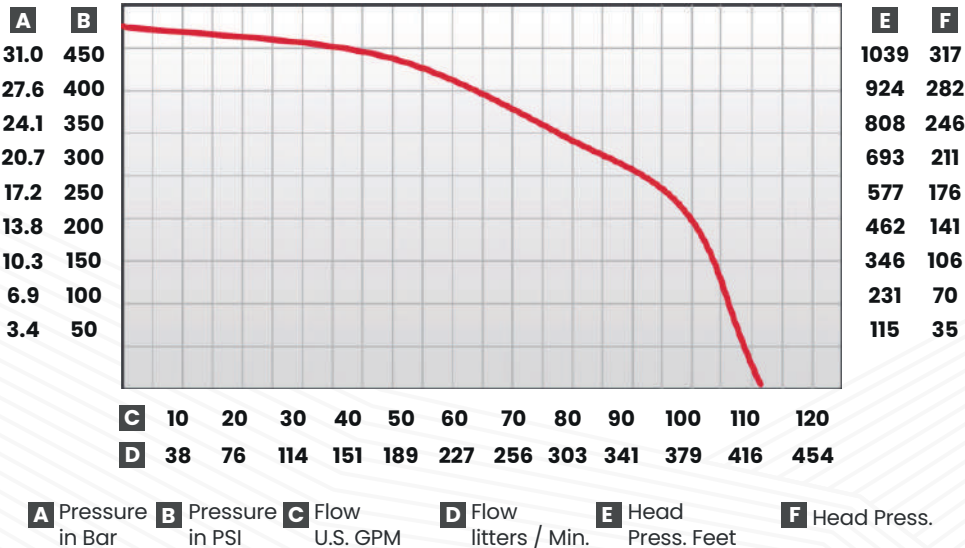

1



2



3



## 1 ENGINE:

- Kohler Command Pro CH440 4-stroke, 14 HP engine.
- Gasoline-powered.
- Electric start and manual emergency start.

## 2 PUMP:

- 4-stage centrifugal pump.
- Made of aluminum.
- Stainless steel shaft and oil-bath mechanism.
- Compatible with foaming agents.
- Maximum flow rate of 400 l/min and maximum pressure of 26 bar.

## 3 REEL:

- Fixed manual reel made of corrosion-resistant steel.
- Baked-on red paint (RAL 3000).
- Compatible with flat hoses up to 40 meters long and 1" in diameter.
- Manual locking system.

## STANDARDS AND CERTIFICATIONS:

- Flame-resistant tank certified to DIN 53438-1/3 and FIAT 50433/01.




## Sprinklers and Injectors



QR: Use your camera or bar code scanner and download the digital PDF version

- The Hydro-Wick sprinkler is a high-resistance model designed for use with portable fire pumps in wildfire suppression operations.
- The set includes a split water nozzle, mounting holes, and GHT threaded fittings, allowing the sprinkler to be used with the Myti-Flo hose (19 mm / 3/4") and the 1 1/2" water splitter.



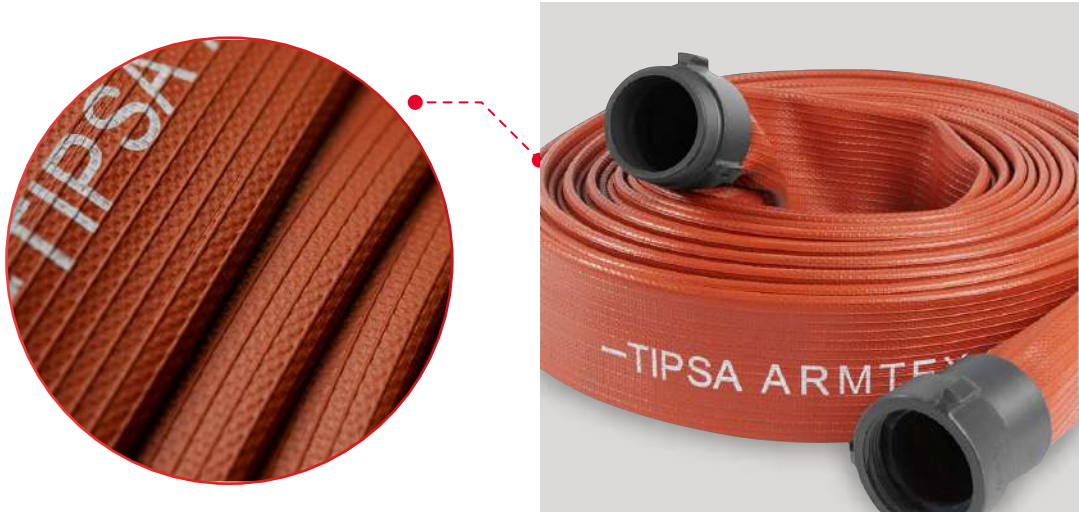

## Tipsa Armtex One Hose



QR: Use your camera or bar code scanner and download the digital PDF version

### USES:

Developed and recommended for firefighting or industrial applications.

### DESIGN AND MATERIALS

- Made with 100% high-tenacity synthetic yarn, circularly woven.
- Nitrile and PVC synthetic rubber, extruded through the weave to create a homogeneous structure.
- Service temperature range: From -30°C (-22°F) to 80°C (176°F).
- Thermal resistance: 600°C (1,112°F) for a minimum of 2 minutes.
- Maximum static resistance: 100 psi (700 kPa).

### CERTIFICATIONS:

Certified according to UNE 23091-2A; Australian Standard AS 2792-1992: Fire hose – Delivery layflat or Global Mark according to British Standard BS 6391/Type 3, depending on the model.

| Reference | UL Certified Hose Reference | Nominal Internal Diameter |     | Thickness |       | Service Pressure |     | Test Pressure |       | Burst Pressure |       | Nominal Weight |       |
|-----------|-----------------------------|---------------------------|-----|-----------|-------|------------------|-----|---------------|-------|----------------|-------|----------------|-------|
|           |                             | mm                        | In. | mm        | In.   | bar              | psi | bar           | psi   | bar            | psi   | kg/m           | lb/ft |
| F550012A  |                             | 25                        | 1   | 1,9       | 0,075 | 40               | 580 | 80            | 1.160 | 120            | 1.740 | 0,21           | 0,14  |
| F550034A  | F550037A*                   | 38                        | 1 ½ | 2         | 0,079 | 21               | 300 | 42            | 600   | 63             | 900   | 0,32           | 0,22  |
| F550056A  |                             | 45                        | 1 ¾ | 2         | 0,079 | 21               | 300 | 42            | 600   | 63             | 900   | 0,37           | 0,25  |
| F550067A  |                             | 52                        | 2   | 2,2       | 0,087 | 18               | 250 | 35            | 500   | 52             | 750   | 0,47           | 0,32  |
| F552870A  |                             | 64                        | 2 ½ | 2,2       | 0,087 | 18               | 255 | 35            | 510   | 53             | 765   | 0,59           | 0,40  |
| F552142A  | F552141A*                   | 65                        | 2 ½ | 2,2       | 0,087 | 18               | 255 | 35            | 510   | 53             | 765   | 0,59           | 0,40  |
| F550103A  |                             | 70                        | 2 ¾ | 2,3       | 0,091 | 18               | 250 | 35            | 500   | 52             | 750   | 0,66           | 0,44  |
| F550114A  |                             | 75                        | 3   | 2,3       | 0,091 | 15               | 225 | 30            | 450   | 46             | 675   | 0,69           | 0,46  |
| F550147A  |                             | 102                       | 4   | 2,6       | 0,102 | 12               | 170 | 23            | 340   | 35             | 500   | 0,95           | 0,64  |
| F550158A  |                             | 110                       | 4 ¼ | 2,6       | 0,102 | 10               | 150 | 20            | 300   | 30             | 450   | 1,05           | 0,71  |



Scan the QR code  
and find more  
information about  
our product.

# Tritón Inflatable Tanks

On-site rapid inflation using an electric pump, creating a highly rigid structure that replaces traditional aluminum frames.

## USES

Designed for the temporary storage of water during wildfire suppression operations and other activities that require on-site supply.

## DESIGN & MATERIALS:

All models include a repair kit with integrated Velcro.

Handles and rings are designed for quick handling and secure fastening.

Can be transported on wildland fire trucks, optimizing space compared to traditional foldable tanks with aluminum structures.

Double wall (Drop-Stitch) made of PVC 2.6kg/m<sup>2</sup> Grey Color. These walls are 20 cm thickness when inflated, to give higher resistance.

Single wall in floor and closures made of PVC 0.9mm - 1.1kg/m<sup>2</sup> Red Color.

25,000 L and 50,000 L models: designed for use with Bambi buckets.

Reinforced top on Tritón 25,000 L and 50,000 L models, preventing damage during use with Bambi buckets.



## MODEL TABLE

| Model                                                                                                      | Capacity              | Dimensions and weight                                       | Materials and Construction                    | Components                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tritón 2300</b><br>    | 2.300 L / 600 gal     | 38kg<br>Ø 1,8 m × 1,5 m high                                | 0,9 mm PVC + 20 cm drop-stitch (gray and red) | <ul style="list-style-type: none"> <li>- 1 Outlet 3"</li> <li>- 2 Valves</li> <li>- 4 rings and 4 handles</li> <li>- 2 rings for hold hose</li> <li>- Velcro fastener for repair kit</li> </ul> |
| <b>Tritón 8000</b><br>    | 8.000 L / 2.100 gal   | 63kg<br>Ø 4,0 m × 0,8 m high                                | 0,9 mm PVC + 20 cm drop-stitch (gray and red) | <ul style="list-style-type: none"> <li>- 1 Outlet 3"</li> <li>- 2 Valves</li> <li>- 6 rings and 6 handles</li> <li>- 2 rings for hold hose</li> <li>- Velcro fastener for repair kit</li> </ul> |
| <b>Tritón 15000</b><br>   | 15.000 L / 4.000 gal  | 85kg<br>Ø 4,0 m × 1,5 m high                                | 0,9 mm PVC + 20 cm drop-stitch (gray and red) | <ul style="list-style-type: none"> <li>- 1 Outlet 3"</li> <li>- 3 Valves</li> <li>- 6 rings and 6 handles</li> <li>- 2 rings for hold hose</li> <li>- Velcro fastener for repair kit</li> </ul> |
| <b>Tritón 25000</b><br> | 25.000 L / 6.500 gal  | 132kg<br>Ø 4,5 m × 2,0 m high (with superior reinforcement) | 0,9 mm PVC + 20 cm drop-stitch (gray and red) | <ul style="list-style-type: none"> <li>- 1 Outlet 3"</li> <li>- 3 Valves</li> <li>- 6 rings and 6 handles</li> <li>- 2 rings for hold hose</li> <li>- Velcro fastener for repair kit</li> </ul> |
| <b>Tritón 50000</b><br> | 50.000 L / 13.000 gal | 170kg<br>Ø 6,0 m × 2,0 m high (with superior reinforcement) | 0,9 mm PVC + 20 cm drop-stitch (gray and red) | <ul style="list-style-type: none"> <li>- 1 Outlet 3"</li> <li>- 3 Valves</li> <li>- 6 rings and 6 handles</li> <li>- 2 rings for hold hose</li> <li>- Velcro fastener for repair kit</li> </ul> |

## AVAILABLE ACCESSORIES AND COMPLEMENTS

| Accessory                                                                                                             | Technical Description                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>Carry Bag</b><br>               | Made of PVC with Carrying Strap / available for Tritón 2.300 / 8.000 / 15.000.                                                       |
| <b>0.45 mm PVC floor</b><br>       | Available for models 2,300 (2,5 × 2,5 m) / 8,000 (4,7 × 4,7 m) / 15,000 (4,7 × 4,7 m) / 25,000 (5,5 × 5,5 m) / 50,000 (6,9 × 6,9 m). |
| <b>Foldable plastic pallet</b><br> | Made of plastic and steel / available for Tritón 25.000 / 50.000. Dimensions: 120 × 100 × 100 cm. Weight: 45 kg. Includes top cover. |
| <b>Anchoring kit Repair kit</b>                                                                                       |                                                                                                                                      |

| Inflation system                       |                                                                                                                                        |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>150W Cordless Electric Air Pump</b> | 12V 10A electric air pump with a 4000 mAh lithium battery. Inflation pressure: 0–20 psi. Dimensions: 24 × 18 × 8.6 cm. Weight: 1.5 kg. |
| <b>Cordless Air Pump</b>               | Optional                                                                                                                               |





# Water backpack accessories and spare parts



QR: Use your camera or bar code scanner and download the digital PDF version

## MULTIPLE SPARE PARTS FOR INFOREST WATER BACKPACK

### SPARE PARTS:

- 1 Internal bag for water backpack.
- 2 Cap for water backpack.
- 3 Reinforcement washer with filter.
- 4 Discharge hose.
- 5 Double-action nozzle.
- 6 Spray nozzle repair kit.
  - 6.A: Plastic piston
  - 6.B: Ceran WR2 grease
  - 6.C: Acetal tip
  - 6.D: O-ring 72-116
  - 6.E: O-ring 72-207
  - 6.F: O-ring 52 - 113
  - 6.G: Steel ball and stainless steel bolt
  - 6.H: Spring, valve, O-ring 72 - 201
  - 6.I: O-ring 13x3

### ACCESSORIES:

(OPTIONAL)

- 7 Carry Bag for transporting water backpack.



| WEIGHT AND DIMENSIONS |             |         |
|-----------------------|-------------|---------|
| Length                | 13.5"       | 34 cm   |
| Width                 | 11.5"       | 29 cm   |
| Height                | 12.0"       | 30.5 cm |
| Weight                | 18.6 libras | 8.4 kg  |
| Suction               | 1.5" NPSH   | 38 mm   |
| Discharge             | 1.5" NPSH   | 38 mm   |



Standard performance correction according to SAE J1349:  
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg.



## Wick 100M Motor Pump

### Single-stage centrifugal pump, 2-stroke engine




QR: Use your camera or bar code scanner and download the digital PDF version

#### USES:

- Pump equipped with a Mitsubishi MEIKI 2-stroke, 47 cc engine.
- Centrifugal clutch.
- Single-stage pump, compatible with foam, clamp-mounted for easy disassembly.
- Integrated fuel tank provides approximately 60 minutes of operation.

- Fuel tank guard.
- Auxiliary tank (RFT) allows extended operation time.
- 25% fuel consumption reduction.

| ENGINE                                                                                                                                      |                                           |        |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|--------|
| Model:                                                                                                                                      | Type: 2-stroke;<br>47 cc, 2.4 HP / 1.8 kW |        |
| Mitsubishi TLE48                                                                                                                            |                                           |        |
| Ignition                                                                                                                                    | Electronic                                |        |
| Fuel tank capacity                                                                                                                          | 0.89 Qt US                                | 0,84 L |
| *Weight shown for standard model. RFT model weighs 19.9 lb / 9.0 kg.<br>Performance specifications may be subject to change without notice. |                                           |        |

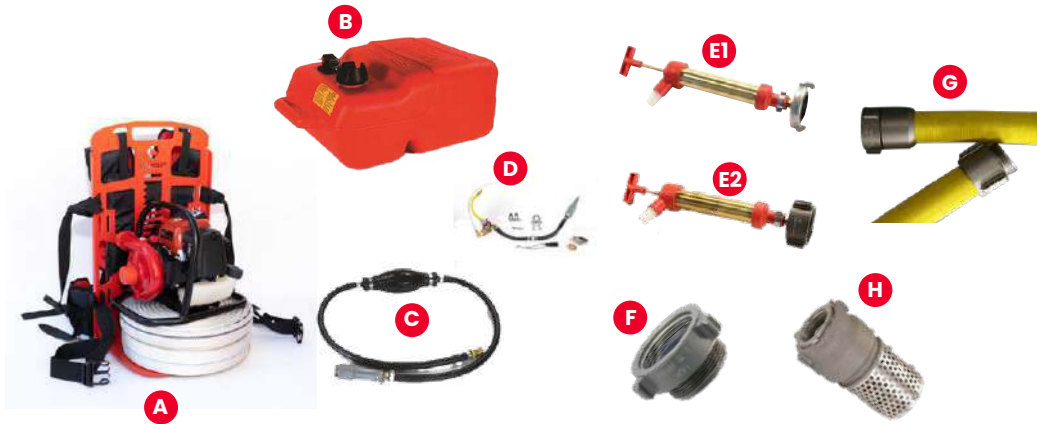

#### OPTIONAL

|    | Part No.       | Description                                                                   |
|----|----------------|-------------------------------------------------------------------------------|
| A  | 02PIFRMH0033   | Inforest rigid backpack.                                                      |
| B  | 70FLPFT5       | 25 L / 6.6 U.S. gallon fuel tank.                                             |
| C  | 70FLPFL-M      | Complete fuel line for Mercury tank.                                          |
| D  | 71W11-RFTKIT-M | Wick 100G remote fuel connection kit / Mercury.                               |
| E1 | 70FLHPPQC      | Hydro-Wick® manual primer – 38 mm / 1½” quick coupling QC.                    |
| E2 | 70FLHPPPS      | Hydro-Wick® manual primer – 38 mm / 1½” female NPSH.                          |
| E2 | 70FLHPPNH      | Hydro-Wick® manual primer – 38 mm / 1½” female NH NST.                        |
| F  | 70FL15TPPS     | 1½” NPSH thread protector.                                                    |
| F2 | 6124NM24PF     | 1½” MNST male to 1½” NPSH female extruded adapter.                            |
| F3 | 6324QC27       | 1½” female NPSH to QC adapter.                                                |
| G  | 70FL15DLPS10   | Reinforced low-pressure suction hose<br>Draftlite 1½”/38 mm x 10’ / 3 m NPSH. |
| H  | 70FLFV15PF     | Foot valve with aluminum filter 1½”/38 mm female NPSH.                        |

#### TECHNICAL SPECIFICATIONS

- Mitsubishi MEIKI engine, 2.4 HP, 47 cc, 2-stroke.
- Operates efficiently on any slope.
- Centrifugal clutch.
- Easy starting with decompression system.
- Impact guard to protect the underside of the fuel tank.
- Auxiliary remote fuel connection system (RFT).
- Auxiliary fuel supply options available for Chrysler, Mercury, or SAE-style fuel connectors.
- Optional electronic shut-off switch for overspeed protection.
- Electronic ignition.
- The pump delivers minimum flow and pressure values as shown in the performance chart.
- Optional: portable backpack unit.

#### WICK® 100M

| Part No.         | Description                                                                                   |
|------------------|-----------------------------------------------------------------------------------------------|
| 71WICK100M       | Wick® 100M Fire Pump – Standard model.                                                        |
| 71WICK100M-RFT   | Wick® 100M Fire Pump (with Mercury remote tank connection kit).                               |
| 71WICK100M-RFTCO | Wick® 100M Fire Pump (with Mercury remote tank connection kit and electronic shut-off valve). |





# Wick 100-4H motor pump

## Single-Stage Centrifugal Pump, 4-Stroke Engine



QR: Use your camera or bar code scanner and download the digital PDF version

- The pump is equipped with a 4-stroke Honda engine, 50 cc.
- Integrated fuel tank.
- Single-stage pump, detachable with a clamp, compatible with foam systems.
- Clutch allows easy starting and water savings.
- Available with a backpack support and padded straps.
- Optional manual primer mounted on the base.
- Complies with emission regulations established by the U.S. EPA/CARB agencies.

\*The net output power is 2.1 HP @ 7000 RPM.  
Due to series manufacturing of the engine, this value may vary.



A Pressure in Bar B Pressure in PSI C Flow U.S. GPM D Flow liters/ Min. E Head Press. Feet F Head Press. Meters

| WEIGHT AND DIMENSIONS |           |         |
|-----------------------|-----------|---------|
| Length                | 14.0"     | 36 cm   |
| Width                 | 11.0"     | 28 cm   |
| Height                | 16.0"     | 41 cm   |
| Weight                | 20.2 lbs  | 9.16 kg |
| Suction               | 1.5" NPSH | 38 mm   |
| Discharge             | 1.5" NPSH | 38 mm   |

| ENGINE                                                                                                           |                          |               |
|------------------------------------------------------------------------------------------------------------------|--------------------------|---------------|
| Honda GXH50 Clutch                                                                                               | 4-stroke;<br>50 cc; 2,5* | HP @ 7000 rpm |
| Fuel tank capacity                                                                                               | 0.81 qt. US              | 0.77 L        |
| Oil capacity                                                                                                     | 0.26 qt. US              | 0.25 L        |
| The net output power is 2.1 HP @ 7000 RPM.<br>Due to series manufacturing of the engine,<br>this value may vary. |                          |               |



#### OPCIONAL

|    | Part No.        | Description                                                                         |
|----|-----------------|-------------------------------------------------------------------------------------|
| A  | 02PIFRMH0033    | Inforest rigid backpack                                                             |
| B1 | 70FLHPPQC       | Hydro-Wick® manual primer – 38mm / 1 ½" Quick Coupling (QC)                         |
| B2 | 70FLHPPPS       | Hydro-Wick® manual primer – 38mm / 1 ½" NPSH Female                                 |
| B2 | 70FLHPPNH       | Hydro-Wick® manual primer – 38mm / 1 ½" NH (NST) Female                             |
| B3 | 71W104-PRIMEKIT | Manual primer kit for WICK® 100-4H                                                  |
| C1 | 70FL15TPPS      | 1 ½" NPSH thread protector                                                          |
| C2 | 6124NM24PF      | Fixed adapter 1 ½" NH (NST) Male to 1 ½" NPSH Female                                |
| C3 | 6324QC27        | Adapter 1 ½" NPSH Female to QC                                                      |
| D  | 70FL15DLP10     | High-pressure hose for reinforced suction Draftlite 1 ½" / 38mm x 10' NPSH 3 meters |
| E  | 70FLFV15PF      | Foot valve with filter (Aluminum) 1 ½" / 38mm NPSH Female                           |

#### TECHNICAL SPECIFICATIONS

- Engine: Honda brand, model GX50, 50cc, 4-stroke.
- Centrifugal clutch.
- Single-stage pump compatible with foam, featuring a detachable (bolt-on) system.
- Integrated fuel tank providing approximately 40 minutes of operation.
- Equipped with electronic ignition.
- Manual primer mounted on the base.
- Approximate weight: 9.16 kg / 20.2 lbs.
- Complies with emission regulations established by the U.S. EPA / CARB agencies.
- The pump delivers minimum flow and pressure as shown in the performance graph.

#### WICK® 100-4H

| Part No.      | Description                                                          |
|---------------|----------------------------------------------------------------------|
| 71WICK100-4HA | WICK® 100-4H Fire Pump (with optional manual primer mounted on base) |





## WEIGHT AND DIMENSIONS

|           |                  |               |
|-----------|------------------|---------------|
| Length    | <b>14.0"</b>     | <b>36 cm</b>  |
| Width     | <b>11.0"</b>     | <b>28 cm</b>  |
| Height    | <b>11.75"</b>    | <b>30 cm</b>  |
| Weight    | <b>17.5 lbs</b>  | <b>7,9 kg</b> |
| Suction   | <b>1.5" NPSH</b> | <b>38 mm</b>  |
| Discharge | <b>1.5" NPSH</b> | <b>38 mm</b>  |



**Performance standard correction according to SAE J1349:  
60°F / 15.5°C; Baro 29.92 inHg / 101.3 mB**



## Wick 100 4M Motor Pump

Single-stage centrifugal pump, 4-stroke engine

**USES:**

- 4-stroke pump with multiple mounting positions. Honda GX50 engine.
- Mounted on a rear panel-style transport base with a short handle.
- Integrated fuel tank.
- Centrifugal clutch.
- Available in vertical discharge version and also with optional manual primer mounted.
- Complies with emission regulations established by the EPA / CARB agencies in the United States.



QR: Use your camera or bar code scanner and download the digital PDF version

| ENGINE                                                                                                |                                              |        |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------|--------|
| Model: Honda GX50                                                                                     | Type: 4-stroke; 48 cc;<br>2.0* HP @ 7000 rpm |        |
| Clutch                                                                                                | Centrifugal                                  |        |
| Fuel tank capacity                                                                                    | 0.67 Qt. US                                  | 0.63 L |
| Oil capacity                                                                                          | 0.14 Qt US                                   | 0.13 L |
| *Production engines may vary from this value.<br>Specifications are subject to change without notice. |                                              |        |

\*Production engines may vary from this value.  
Specifications are subject to change without notice.



TECHNICAL SPECIFICATIONS

- Portable fire pump with Honda GX50, 48cc, 4-stroke engine.
- Equipped with a centrifugal clutch.
- Single-stage pump compatible with foam, featuring a detachable (bolt-on) system.
- Integrated fuel tank providing approximately 40 minutes of operation.
- Electronic ignition.
- Approximate weight: 8.2 kg / 18 lb.
- The pump delivers minimum flow and pressure values as shown in the performance chart.




WICK® 100M

|   | Part No.        | Description                                                            |
|---|-----------------|------------------------------------------------------------------------|
| A | 71WICK100-4HMB  | WICK® 100-4M. Multi-position with transport panel.                     |
| B | 71WICK100-4HMBV | WICK® 100-4M. Multi-position with transport panel, vertical discharge. |
| C | 71WICK100-4HMBP | WICK® 100-4M. Multi-position with transport panel and manual primer.   |

OPTIONAL

|    | Part No.        | Description                                                             |
|----|-----------------|-------------------------------------------------------------------------|
| A1 | 70FLHPPQC       | Hydro-Wick® manual primer – 38 mm / 1½" quick coupling (QC).            |
| A2 | 70FLHPPPS       | Hydro-Wick® manual primer – 38 mm / 1½" female NPSH.                    |
| A2 | 70FLHPPNH       | Hydro-Wick® manual primer – 38 mm / 1½" female NH (NST).                |
| A3 | 71W104-PRIMEKIT | Manual priming kit for WICK® 100-4H.                                    |
| B1 | 6324QC27        | 1½" female NPSH to QC adapter.                                          |
| B2 | 6124NM24PF      | 1½" NH male to 1½" female NPSH extruded adapter.                        |
| C  | 70FL15DLPS10    | Reinforced suction hose, high pressure. Draftlite 1½"/38 mm x 10' NPSH. |
| D  | 70FLFV15PF      | Foot valve with aluminum filter 1½"/38 mm female NPSH.                  |
| E  | 71W104-HMBPACK  | Padded harness assembly for WICK® 100-4HM.                              |






# Wick 250 Motor Pump

## High-pressure fire pump – 3-stage, 2-stroke engine



QR: Use your camera or bar code scanner and download the digital PDF version

- Fire pump equipped with an 8 HP, 2-stroke engine coupled to a 3-stage pump compatible with foam use.
- Electronic switch for overspeed protection.
- Available with padded backpack harness support.

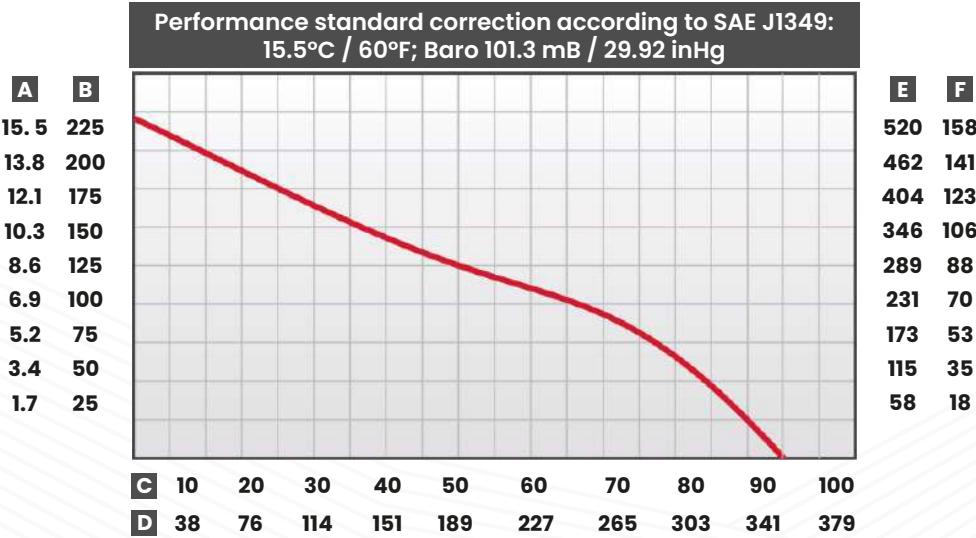


**A** Pressure in Bar   **B** Pressure in PSI   **C** Flow U.S. GPM   **D** Flow liters / Min.   **E** Head Press. Feet   **F** Head Press.

| WEIGHT AND DIMENSIONS |           |            |
|-----------------------|-----------|------------|
| Length                | 15.3"     | 39 cm      |
| Width                 | 13.0"     | 33 cm      |
| Height                | 12.5"     | 31.8 cm    |
| Weight                | 31 libras | 14.1 kg    |
| Suction               | 2" NPSH   | 50 mm NPSH |
| Discharge             | 1 ½"      | 38 mm NPSH |

| ENGINE            |                                                 |                   |
|-------------------|-------------------------------------------------|-------------------|
| Series Hydro-Wick | 2-stroke;<br>134 cc                             | 8 HP<br>@8000 rpm |
| Ignition          | Magneto flywheel<br>/ solid state / breakerless |                   |
| Cylinders         | Nikasil                                         |                   |
| Fuel mixture      | 24:1                                            |                   |

Performance specifications may vary and are subject to change without prior notice.

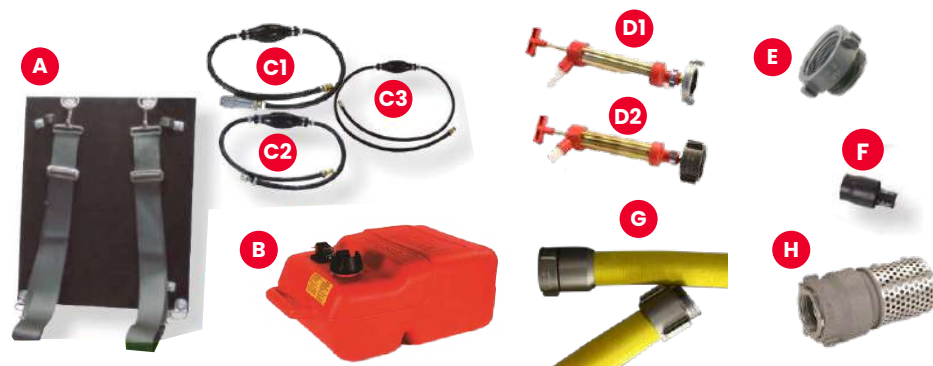

#### OPTIONAL

| Part No.              | Description                                                           |
|-----------------------|-----------------------------------------------------------------------|
| <b>A</b> 71W25-HPACK  | Backpack support with transport straps.                               |
| <b>B</b> 70FLPFT5     | 25 L / 6.6 U.S. gallon fuel tank.                                     |
| <b>C1</b> 70FLPFL-M   | Complete fuel line for Mercury tank.                                  |
| <b>C2</b> 70FLPFL     | Complete fuel line for Chrysler tank.                                 |
| <b>C3</b> 70FLPFL-GSA | Complete fuel line with swivel female (GSA) 1.4 m (56").              |
| <b>D1</b> 70FLHPPQC   | Hydro-Wick® manual primer – 38 mm / 1½" quick coupling (QC).          |
| <b>D2</b> 70FLHPPPS   | Hydro-Wick® manual primer – 38 mm / 1½" female NPSH.                  |
| <b>D2</b> 70FLHPPNH   | Hydro-Wick® manual primer – 38 mm / 1½" female NH (NST).              |
| <b>E</b> 70FL15TPPS   | 1½" NPSH thread protector.                                            |
| <b>E</b> 70FL20TPPS   | 2" NPSH thread protector.                                             |
| <b>E</b> 6124NM24PF   | 1½" NH (NST) male to 1½" female NPSH extruded adapter.                |
| <b>F</b> 71W37-SPKARR | Spark arrestor (Wick 250 and Wick 375).                               |
| <b>G</b> 70FL20DLPS10 | Reinforced suction hose, high pressure Draftlite 2"/51 mm x 10' NPSH. |
| <b>H</b> 70FLFV2PF    | Foot valve with aluminum filter 2"/51 mm female NPSH.                 |

#### TECHNICAL SPECIFICATIONS

- Portable fire pump with 8 HP, 2-stroke engine.
- Engine coupled to a 3-stage pump compatible with foam; equipped with an electronic shut-off switch for overspeed protection.
- Disassemblable recoil start system.
- Fuel connection available with a quick-coupling system compatible with Chrysler, Mercury, or SAE design.
- Optional: spark arrestor approved by the U.S. Department of Agriculture.
- Optional: transport backpack.
- Approximate weight: 14.1 kg / 31 lb.
- The pump delivers minimum flow and pressure as shown in the performance chart.

#### WICK® 250

| Part No.        | Description                                                                   |
|-----------------|-------------------------------------------------------------------------------|
| 71WICK250-AC    | WICK® 250 Fire Pump – Chrysler connection (New N-Coil).                       |
| 71WICK250-MAC   | WICK® 250 Fire Pump – Mercury connection (New N-Coil).                        |
| 71WICK250-MAQC  | WICK® 250 Fire Pump – Mercury connection (New N-Coil with low-tone silencer). |
| 71WICK250-SAEAC | WICK® 250 Fire Pump – SAE connection with spark arrestor (New N-Coil).        |





| WEIGHT AND DIMENSIONS |            |         |
|-----------------------|------------|---------|
| Length                | 8,3 cm     | 38,75"  |
| Width                 | 40,6 cm    | 25,0"   |
| Height                | 48,3 cm    | 23"     |
| Weight                | 24,1 kg    | 74 Lbs  |
| Suction               | 50 mm NPSH | 1½ NPSH |
| Discharge             | 38 mm NPSH | 1½ NPSH |

Performance standard correction according to SAE J1349:  
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg



**A** Pressure in Bar    **B** Pressure in PSI    **C** Flow U.S. GPM    **D** Flow liters / Min.    **E** Head Press. Feet    **F** Head Press.

# WICK SI 250 MOTOR PUMP

## High-pressure fire pump – 3-stage, 4-stroke engine




QR: Use your camera or bar code scanner and download the digital PDF version

- Fire pump equipped with a quiet 4-stroke Kohler Command Pro® engine, air-cooled, 7 HP, featuring overspeed protection and low-oil level sensor.
- Automatic decompression system for easier manual starting.
- Quad-clean™ four-stage cyclonic air filter system.
- Forged steel crankshaft with double ball bearings.
- Delivers 43% to 65% higher pressure output.
- Flow rate 25% to 30% greater at 6.9 bar (100 psi).
- Can operate in tandem at pressures over 28 bar (400 psi).
- Three-stage pump compatible with foam.
- Impellers and diffusers made of anodized aluminum.
- Maintenance-free throttle.
- Standard base for vehicle mounting and handle for easy transport.
- Optional electric start and/or full wrap-around frame.
- Fuel-efficient engine with belt-driven pump system.
- Includes anti-vibration rubber mounts.
- 3-year manufacturer's warranty on the engine.

| ENGINE                                                                                                                                                                           |                                          |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------|
| Model Kohler Command Pro®                                                                                                                                                        | Type 4-stroke; 48 cc; 2.0* HP @ 7000 rpm |          |
| Power                                                                                                                                                                            | 7 HP gross @ 4000 rpm                    |          |
| Ignition                                                                                                                                                                         | Electronic                               |          |
| Fuel tank capacity                                                                                                                                                               | 3,6 Lts                                  | 0,95 Gal |
| *Quad-clean™ and Command Pro® are registered trademarks of Kohler.<br>**Add 2.7 kg (6.0 lb) for model with electric starter.<br>Specifications subject to change without notice. |                                          |          |

### OPTIONAL

| Part No.  | Description                                                  |
|-----------|--------------------------------------------------------------|
| <b>A1</b> | 70FLHPPQC Manual primer with QC connection.                  |
| <b>A2</b> | 70FLHPPPS Manual primer with NPSH connection.                |
| <b>A2</b> | 70FLHPPNH Manual primer with NH connection.                  |
| <b>B1</b> | 70FLI5TPPS 1½" (38 mm) NPSH thread protector.                |
| <b>B2</b> | 70FL20TPPS 2" NPSH thread protector.                         |
| <b>C</b>  | 70FL20DLPS10 2" x 10' (3 m) NPSH suction hose.               |
| <b>D</b>  | 70FLFV2PF Foot valve with 2" x 10' (3 m) NPSH female filter. |

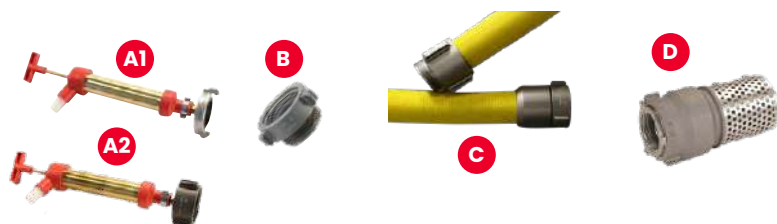

### WICK® Si250

| Part No.          | Description                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| 71WICKSI250-7K    | 7 HP 4-stroke Kohler engine, 3-stage pump, integrated fuel tank, vehicle-mounting base.                                                  |
| 71WICKSI250-7KE   | 7 HP 4-stroke Kohler engine, electric start, 3-stage pump, integrated fuel tank, vehicle-mounting base.                                  |
| 71WICKSI250-7KEH  | 7 HP 4-stroke Kohler engine, electric start, 3-stage pump, integrated fuel tank, horizontal throttle accelerator, vehicle-mounting base. |
| 71WICKSI250-7KTR  | 7 HP 4-stroke Kohler engine, 3-stage pump, integrated fuel tank, wrap-around frame.                                                      |
| 71WICKSI250-7KETR | 7 HP 4-stroke Kohler engine, electric start, 3-stage pump, integrated fuel tank, wrap-around frame.                                      |

### TECHNICAL SPECIFICATIONS

- Fire pump powered by a Kohler 7 HP Command Pro engine, with overspeed protection and low-oil sensor.
- Quad-clean™ four-stage cyclonic air filter system.
- Forged steel crankshaft with double ball bearings.
- Three-stage pump with anodized aluminum impellers.
- Single-piece housing with belt/pulley system designed for low maintenance, acting as a speed multiplier.
- Transmission belt control without removing the pump from the flange.
- Pump with closed discharge delivers a minimum pressure of 13.8 bar (200 psi) and up to 189 L/min (50 US gpm) at 6.9 bar (100 psi).
- Standard base for vehicle mounting and transport handle, available in wrap-around tubular frame.
- Emissions compliant with EPA / CARB Tier III.
- Engine covered by 3-year manufacturer's warranty.
- Weight: 24.1 kg (53 lb) for profile frame model, or 27.3 kg (60 lb) for wrap-around frame model.
- The pump provides minimum flow and pressure values as shown in the performance chart.

### WEIGHT AND DIMENSIONS (wrap-around frame)

|              |         |        |
|--------------|---------|--------|
| Length       | 48,3 cm | 19,0"  |
| Width        | 40,6 cm | 15,0"  |
| Height       | 48,3 cm | 19,0"  |
| Weight (dry) | 24,1 km | 53 Lbs |

\*Add 6.0 lb / 2.7 kg for the electric start model.






# Wick 375 Motor Pump. High-pressure fire pump – 4-stage, 2-stroke engine



QR: Use your camera or bar code scanner and download the digital PDF version

- Fire pump powered by a SOLO 2-stroke engine, 10 HP and 210 cc.
- Equipped with an electronic overspeed protection switch (patented).
- Four-stage pump compatible with foam, detachable by a stainless-steel quick-release clamp.
- Cylinder walls treated with Nikasil.
- Detachable rope-start system for emergency operation.
- Available with padded backpack harness support.
- Refer to the chart for available fuel connection models.

Performance standard correction according to SAE J1349:  
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg

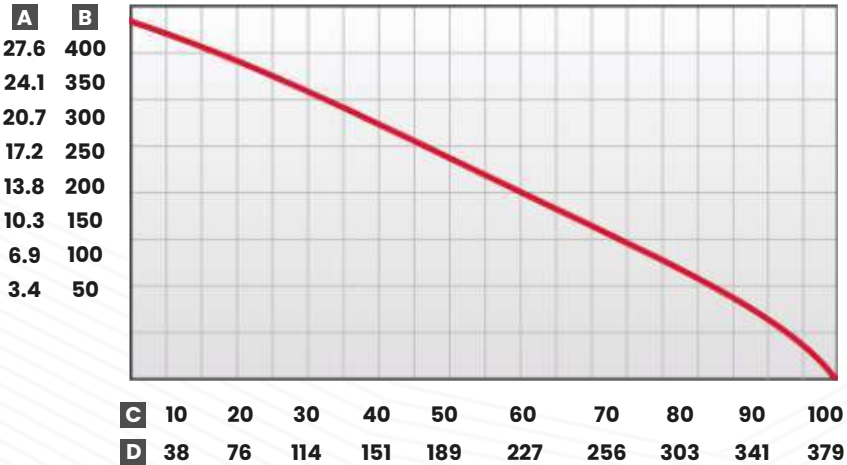

| WEIGHT AND DIMENSIONS |             |         |
|-----------------------|-------------|---------|
| Length                | 22,75"      | 57.8 cm |
| Width                 | 14.25"      | 36.2 cm |
| Height                | 14.25"      | 36.2 cm |
| Weight                | 56.0 libras | 25.4 kg |
| Suction               | 2.0" NPSH   | 50 mm   |
| Discharge             | 1.5" NPSH   | 38 mm   |

| ENGINE    |                                                  |       |
|-----------|--------------------------------------------------|-------|
| Only      | 2-stroke;<br>210 cc                              | 10 HP |
| Ignition  | Magneto flywheel;<br>solid state,<br>breakerless |       |
| Cylinders | Nikasil                                          |       |
| Coil      | 20 Watts                                         |       |

Performance specifications may vary and are subject to change without prior notice.

A Pressure in Bar    B Pressure in PSI    C Flow U.S. GPM    D Flow liters / Min.    E Head Press. Feet    F Head Press.





### OPTIONAL

| Part No. | Description                                                                        |
|----------|------------------------------------------------------------------------------------|
| A        | 71W37-HPACK Backpack harness with padded shoulder straps.                          |
| B        | 70FLPFT5 25 L / 6.6 U.S. gallon fuel tank.                                         |
| C1       | 70FLPFL-M Complete fuel line for Mercury tank.                                     |
| C2       | 70FLPFL Complete fuel line for Chrysler tank.                                      |
| C3       | 70FLPFL-Y Complete fuel line for Yamaha tank.                                      |
| C4       | 70FLPFL-MAN Mercury fuel line with female connection (Manitoba).                   |
| C5       | 70FLPFL-GSA Complete fuel line with swivel female (GSA) 1.4 m (56").               |
| C5       | 70FLPFL-NB Complete fuel line with SAE female swivel on both ends, 1.65 m (65").   |
| C6       | 70FLPFL-USDA Complete fuel line for USDA tank.                                     |
| D1       | 70FLHPPQC Hydro-Wick® manual primer – 38 mm / 1½" quick coupling (QC).             |
| D2       | 70FLHPPPS Hydro-Wick® manual primer – 38 mm / 1½" female NPSH.                     |
| D2       | 70FLHPPNH Hydro-Wick® manual primer – 38 mm / 1½" female NH (NST).                 |
| E        | 70FL15TPPS 1½" NPSH thread protector.                                              |
| E2       | 70FL20TPPS Extruded Adapter 1.5 NH Male x 1.5 NPSH Female.                         |
| E3       | 6124NM24PF 1½" NH (NST) male to 1½" NPSH female extruded adapter.                  |
| F        | 71W37-SPKARR Spark arrestor (Wick 250 and Wick 375).                               |
| G        | 70FL20DLPS10 Reinforced suction hose, high pressure Draftlite 2"/51 mm x 10' NPSH. |
| H        | 70FLFV2PF Foot valve with aluminum filter 2"/51 mm female NPSH.                    |

### TECHNICAL SPECIFICATIONS

- Only engine, 10 HP, 210 cc, 2-stroke.
- Equipped with an electronic overspeed shut-off switch.
- Electronic ignition.
- Cylinder walls are Nikasil-treated for durability.
- Compatible with a 4-stage foam-capable pump, detachable and connected to the engine with a stainless-steel clamp.
- Manual recoil start system.
- Fuel quick-coupling system compatible with Chrysler, Mercury, Yamaha SAE, or USDA design.
- USDA-approved, meeting specification 5100-274C. The primary classification must include at least C-60-200/40, and the secondary classification must include at least C-60-175/50 and C-60-150/60.
- Approximate weight: 25 kg (56 lb).
- The pump delivers minimum flow and pressure as shown in the performance chart.

### WICK® 375

| Part No.       | Description                                                                                                 |
|----------------|-------------------------------------------------------------------------------------------------------------|
| 71WICK375-A    | WICK® 375 Fire Pump – Mercury connection.                                                                   |
| 71WICK375-C    | WICK® 375 Fire Pump – Chrysler connection.                                                                  |
| 71WICK375-SAE  | WICK® 375 Fire Pump – SAE connection.                                                                       |
| 71WICK375-Y    | WICK® 375 Fire Pump – Yamaha connection.                                                                    |
| 71WICK375-YNZ  | WICK® 375 Fire Pump – Yamaha connection for New Zealand with heat protection, silencer, and spark arrestor. |
| 71WICK375-USDA | WICK® 375 Fire Pump – USDA.                                                                                 |
| 71WICK375-ASWD | WICK® 375 Fire Pump – Mercury connection / Sweden special.                                                  |



# Wick FT-200 Motor Pump

## High-pressure floating pump

### 4-stage, 2-stroke engine




QR: Use your camera or bar code scanner and download the digital PDF version

- Floating fire pump. Used for marine service, dewatering, pool maintenance, environmental cleanup, pressure washing, and irrigation.
- Standard front-type mechanical seal. No adjustment required.
- Integrated inlet strainer.
- Water-resistant silencer and air filter.
- Crankshaft support with ball bearing.
- Float-controlled automatic throttle.

| WEIGHT & DIMENSIONS |          |             |
|---------------------|----------|-------------|
| Length              | 29.5"    | 74.9 cm     |
| Width               | 20.0"    | 50.8 cm     |
| Height              | 16.5"    | 41.9 cm     |
| Weight              | 43 lbs   | 19.5 kg     |
| Discharge           | 1½" NPSH | 38 mm NPSH* |

| ENGINE                                                 |                           |
|--------------------------------------------------------|---------------------------|
| Hydro-Wick Series                                      | 2-stroke;<br>134 cc; 8 HP |
| Cylinders                                              | "Nikasil"                 |
| Ignition                                               | Electronic                |
| Fuel tank                                              | 4.7 liters                |
| Specifications subject to change without prior notice. |                           |

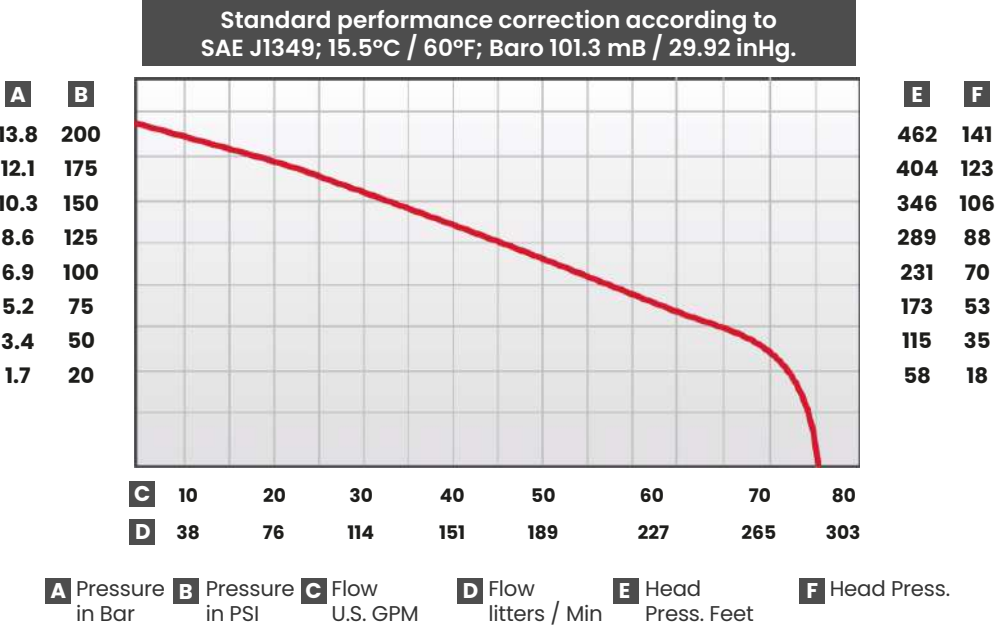

### TECHNICAL SPECIFICATIONS

- Anodized aluminum housing.
- Standard front mechanical seal.
- Integrated intake screen.
- Water-resistant air filter and silencer.
- 8 HP engine, 134 cc (8.20 cu. in.) displacement, air-cooled.
- Retractable manual starter with “D” handle.
- Pressure carburetor with integrated fuel pump.
- Solid-state ignition.
- Hardened, chrome-coated cylinder bore.
- Roller bearing on the connection shaft.
- Fuel mixture of unleaded gasoline and oil.
- The pump delivers minimum flow and pressures as shown in the performance chart.



| WICK® FT-200 |                  |
|--------------|------------------|
| Part No.     | Description      |
| 71WICKFT-200 | Wick FT-200 Pump |





| WEIGHT AND DIMENSIONS |          |          |
|-----------------------|----------|----------|
| Length                | 98,4 cm. | 28,75"   |
| Width                 | 63,5 cm. | 25,0"    |
| Height                | 58.4 cm. | 23"      |
| Weight                | 33,6 kg. | 73 Lbs   |
| Discharge             | 38 mm.   | 1 ½ NPSH |

Standard NPSH threads, other discharge thread options available.



## Wick FT-200-4B fire pump

### High-pressure floating fire pump

### 4-stage pump, 4-stroke engine




QR: Use your camera or bar code scanner and download the digital PDF version

Floating fire pumps can be deployed quickly without the need for suction hoses or foot valves. Suitable for shallow water applications, marine use, environmental work, irrigation, pressure washing, etc.

Powered by a Briggs and Stratton engine, EPA-approved, 4-stroke air-cooled with low fuel consumption and quiet operation. Manual recoil start with overspeed protection.

- Ready Start® system\* and automatic primer.
- Anodized aluminum housing and impeller.
- 9.46 L fuel tank for extended operations.

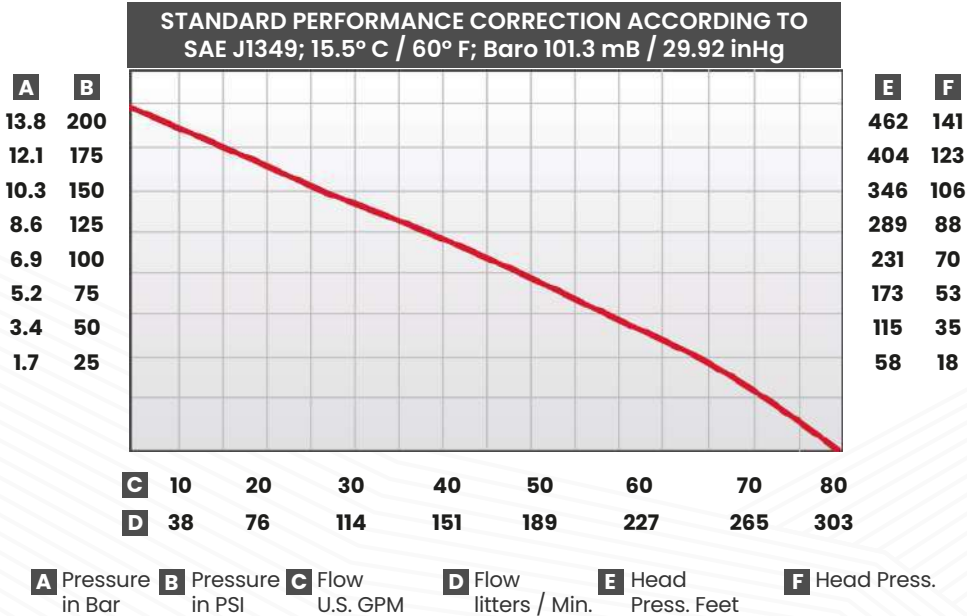

| ENGINE                                  |          |              |
|-----------------------------------------|----------|--------------|
| Briggs & Stratton professional series** | 4-stroke |              |
| Displacement                            | 223 cc   |              |
| Oil capacity                            | 0,54 L   | 18 oz.       |
| Fuel tank capacity                      | 9,46 L   | 2.50 us gal. |
| Fuel tank (optional)                    | 4,73 L   | 1,25 us gal. |

\* Registered trademark of Briggs and Stratton  
\*\* The "professional" series engine has a service life 60% longer than the "E" series  
Specifications subject to change without prior notice.

TECHNICAL SPECIFICATIONS

- Hard-anodized aluminum housing and impeller.
- Self-priming.
- Pump shaft and accessories made of stainless steel.
- Mechanical seal, flat-faced, spring-loaded.
- Maintenance-free.
- Built-in inlet filter.
- 223 cc displacement, single-cylinder, 4-stroke, air-cooled (OHV Overhead Valve) engine with overspeed protection.
- Automatic priming system.
- Manual rewind starter.
- EPA-approved fuel tank.
- Optional 4.7 L fuel tank (Not available in the U.S.).
- The pump delivers minimum flow and pressures as shown in the performance chart.

| WICK® FT-200-4B |                  |                                                                                    |
|-----------------|------------------|------------------------------------------------------------------------------------|
|                 | Part No.         | Description                                                                        |
| A               | 71WICKFT-200-4BX | WICK® FT-200-4B floating pump with 9.5-liter fuel tank                             |
| B               | 71WICKFT-200-4B  | WICK® FT-200-4B floating pump with 4.7-liter fuel tank (Not available in the U.S.) |






## High Flow 2-STAGE MOTOR PUMP, 4-STROKE ENGINE



QR: Use your camera or bar code scanner and download the digital PDF version

- Powered by an 18 HP, 4-stroke Briggs & Stratton Vanguard "V Twin" engine, air-cooled with overspeed protection.
  - Electric start (optional battery) and manual recoil start.
  - Automotive-style air filter and external oil filter.
  - Engine and pump coupled with a stainless-steel quick-release clamp system.
  - Choice of tubular transport frame or channel-mount frame for vehicle installation.
  - Includes check valve on the discharge.
  - Optional integrated fuel tank.
- Two-stage pump compatible with foam, interchangeable with the 4-stage pump and the F200 two-stage pump to increase flow.

Standard performance correction according to SAE J1349; 15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg.

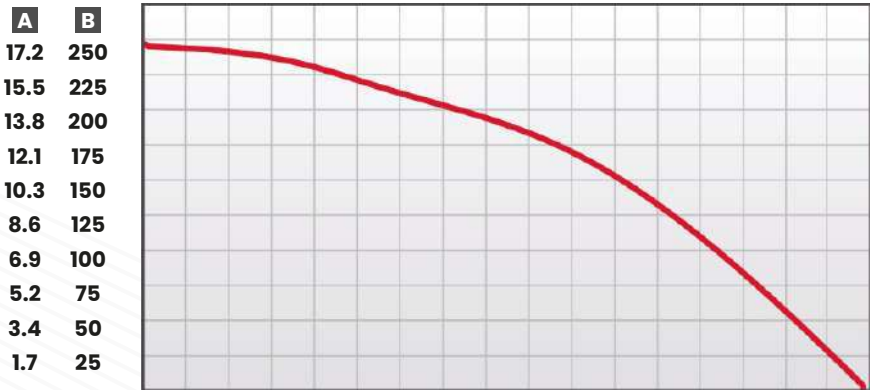

C 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

D 38 76 114 151 189 227 256 303 341 379 416 454 492 530 568 606 644

A Pressure in Bar B Pressure in PSI C Flow U.S. GPM D Flow liters / Min. E Head Press. Feet F Head Press.

| WEIGHT AND DIMENSIONS |           |       |
|-----------------------|-----------|-------|
| Length                | 32.0"     | 81 cm |
| Width                 | 19.5"     | 50 cm |
| Height                | 18.5"     | 47 cm |
| Weight                | 133 lbs   | 62 kg |
| Suction               | 2.0" NPSH | 50 mm |
| Discharge             | 1.5" NPSH | 38 mm |

| ENGINE                                              |                               |
|-----------------------------------------------------|-------------------------------|
| Briggs and Stratton                                 | 4-stroke;<br>18 HP @ 3600 rpm |
| Oil Filter                                          | Cartridge type                |
| Ignition                                            | Electronic                    |
| Performance shown using<br>a 2½" / 64 mm foot valve |                               |
| Specifications subject to change without notice     |                               |



TECHNICAL SPECIFICATIONS

- Briggs & Stratton engine, 18 HP, Vanguard “V Twin”, 4-stroke air-cooled.
- The motor includes electric start with optional battery and a retractable manual recoil start as alternative.
- Integrated throttle with a low-maintenance belt/pulley design.
- Allows control of the drive belt without removing the pump or the pump bracket.
- Throttle installed using a single stainless-steel clamp. Includes a safety lock.
- Glycerin-filled pressure gauge with a minimum range of 0–40 bar / 0 to 600 PSI.
- Integrated manual priming system.
- Equipped with a full wraparound, anti-roll frame, low-profile for easy handling or mounting.
- Optional exhaust-gas priming system.
- The pump delivers minimum flow and pressures as shown in the performance chart.

Wick F200-18BS (HORIZONTAL THROTTLE MODEL, PROFILE FRAME)

| Part No.          | Description                                                                                                             |
|-------------------|-------------------------------------------------------------------------------------------------------------------------|
| 71WICKF200-18BC   | WICK® F200-18BS Pump – Briggs & Stratton 4-stroke, 18 HP, 2-stage pump, profile frame for vehicle mounting.             |
| 71WICKF200-18BT   | WICK® F200-18BS Pump – Briggs & Stratton 4-stroke, 18 HP, 2-stage pump, tubular frame for easy transport.               |
| 71WICKF200-18BCH  | WICK® F200-18BS Pump – Briggs & Stratton 4-stroke, 18 HP, 2-stage pump, horizontal throttle accelerator, profile frame. |
| 71WICKF200-18BCMI | WICK® F200-18BS Pump – Briggs & Stratton 4-stroke, 18 HP, 2-stage pump, auxiliary fuel tank and primer, profile frame.  |



OPTIONAL

|    | Part No.     | Description                                                                    |
|----|--------------|--------------------------------------------------------------------------------|
| A  | 71W42-2715   | Complete control panel for pumps with Briggs & Stratton engines                |
| B  | 71W42-2083   | Exhaust-gas primer for 18 HP Briggs & Stratton                                 |
| C  | 70FLPFT5     | 25-liter fuel tank                                                             |
| D  | 70FLPFL-M    | Complete fuel line (Mercury)                                                   |
| E1 | 70FL15TPPS   | 1½" NPSH thread protector                                                      |
| E2 | 70FL20TPPS   | 2" NPSH thread protector                                                       |
| F  | 70FL20DLPS10 | Draftlite reinforced high-pressure suction hose 2"/51 mm x 10' with NPSH       |
| G  | 70FLFV25NF-S | Foot valve with filter 2½"/64 mm NH (NST) female / stainless-steel mesh filter |



| WEIGHT AND DIMENSIONS |           |         |
|-----------------------|-----------|---------|
| Length                | 33.0"     | 84 cm   |
| Width                 | 19.5"     | 50 cm   |
| Height                | 18.5"     | 47 cm   |
| Weight                | 123 lbs   | 56.7 kg |
| Suction               | 2.0" NPSH | 50 mm   |
| Discharge             | 1.5" NPSH | 38 mm   |



# Wick XP4 – 13H Fire Pump

## High-pressure fire pump – 4-stage, 4-stroke engine



QR: Use your camera or bar code scanner and download the digital PDF version

USES:

- Fire pump equipped with a 4-stroke Honda air-cooled engine with overspeed protection.
- Electric start (optional battery) and manual recoil start.
- Automotive-type air filter and external oil filter cartridge.
- 4-stage pump compatible with foam, interchangeable with the 4-stage pump and the 2-stage F200 pump to increase flow rate.
- Engine and pump coupled by a stainless-steel quick-release clamp system.
- Maintenance-free throttle.
- Standard pressure gauge and discharge adapter.
- Optional tubular or profile frame for vehicle mounting.
- Includes manual primer and pressure gauge.
- Optional: check valve.

Performance standard correction according to SAE J1349:  
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg



A Pressure in Bar B Pressure in PSI C Flow U.S. GPM D Flow liters / Min. E Head Press. Feet F Head Press.


| ENGINE                                                                                      |                                |
|---------------------------------------------------------------------------------------------|--------------------------------|
| Model Honda GX390                                                                           | 4-stroke;<br>13 HP @ 3600 rpm* |
| Oil filter                                                                                  | Cartridge type                 |
| Fuel tank capacity                                                                          | 6.5 lts / 1.7 US Gal           |
| Ignition                                                                                    | Electronic                     |
| *Net output is 11.7 HP @ 3600 rpm.<br>Due to mass production, this value may vary slightly. |                                |

| WICK® XP4 – 13H<br>(HORIZONTAL SPEED ACCELERATOR MODEL, PROFILE FRAME) |                |                                                                                                                             |
|------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------|
|                                                                        | Part No.       | Description                                                                                                                 |
| A                                                                      | 71WK4203-13HC  | WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, profile frame for vehicle mounting.                     |
| B                                                                      | 71WK4203-13HT  | WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, tubular frame for easy transport.                       |
| C                                                                      | 71WK4203-13HCH | WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, horizontal throttle accelerator, profile frame.         |
| D                                                                      | 71WK4203-13HCM | WICK® XP4-13H fire pump, 13 HP Honda 4-stroke engine, 4-stage pump, auxiliary fuel tank, exhaust gas primer, profile frame. |

| OPTIONAL |              |                                                                       |
|----------|--------------|-----------------------------------------------------------------------|
|          | Part No.     | Description                                                           |
| A        | 70FL15CVPPS  | Poppet check valve.                                                   |
| B        | 70FLHPPPS    | Poppet check valve with 25 mm / 1" side outlet.                       |
| C        | 70FLPFT5     | 25 L / 6.6 U.S. gallon fuel tank.                                     |
| D        | 70FLPFL-M    | Complete fuel line for Mercury tank.                                  |
| E        | 70FL15TPPS   | 1½" NPSH thread protector.                                            |
| E        | 70FL20TPPS   | 2" NPSH thread protector.                                             |
| F        | 70FL15DLP10  | Reinforced suction hose, high pressure Draftlite 2"/51 mm x 10' NPSH. |
| G        | 70FLFV15PF   | Foot valve with female filter 2"/51 mm NPSH.                          |
| N/A      | 71W42-13HRFT | Remote fuel connection kit for 13 HP GX390 Honda engine.              |

TECHNICAL SPECIFICATIONS

- Honda GX390 engine with overspeed protection.
- Electric start engine with optional battery and manual recoil start system as backup.
- Interchangeable 4-stage foam-compatible pump, also compatible with 2-stage pumps for higher flow rate.
- Integrated throttle control, low-maintenance design for belt/pulley operation.
- Allows transmission belt control without removing the pump or flange.
- Throttle assembly mounted with a single stainless-steel clamp, featuring a safety lock.
- Full wrap-around frame, anti-vibration and low-profile design for easy handling or vehicle mounting.
- The pump delivers minimum flow and pressure as shown in the performance chart.

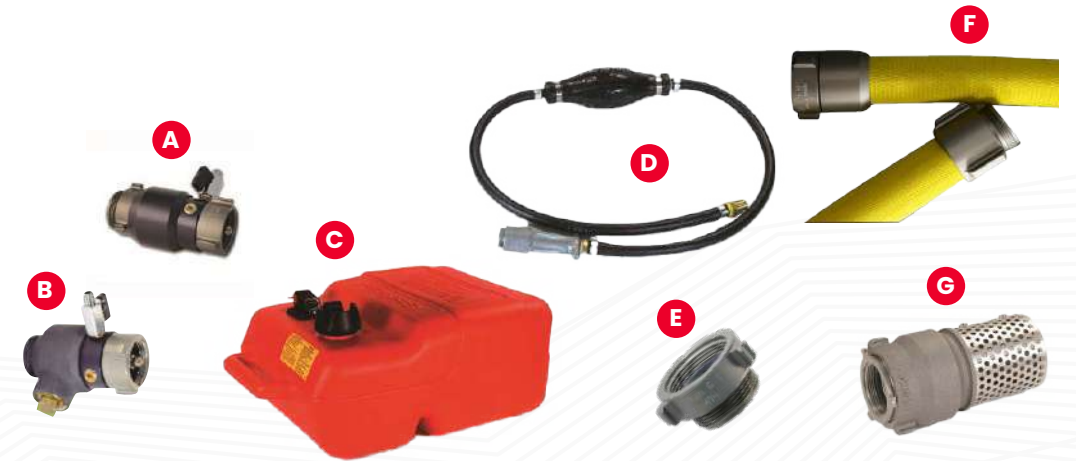






## WEIGHT AND DIMENSIONS

|           |            |         |
|-----------|------------|---------|
| Length    | 33.0"      | 36 cm   |
| Width     | 18.5"      | 28 cm   |
| Height    | 19.0"      | 48 cm   |
| Weight    | 134 libras | 9.16 kg |
| Suction   | 2.0" NPSH  | 50 mm   |
| Discharge | 1.5" NPSH  | 38 mm   |



**Performance standard correction according to SAE J1349:  
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg**

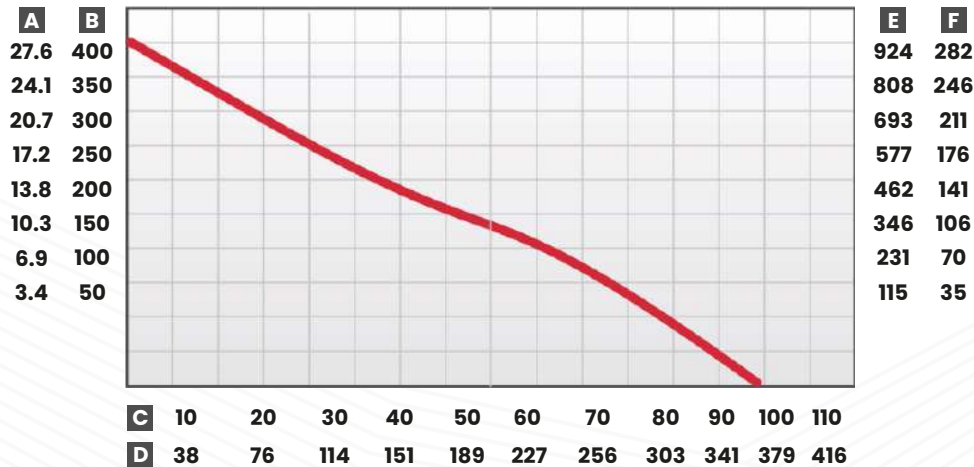

**A** Pressure in Bar   **B** Pressure in PSI   **C** Flow U.S. GPM   **D** Flow liters / Min.   **E** Head Press. Feet   **F** Head Press.

## Wick XP4 – 14B fire pump



QR: Use your camera or bar code scanner and download the digital PDF version

This pump is specially designed with a pressure relief valve in mind and offers standard features such as:

- Briggs & Stratton Vanguard air-cooled 14 HP 4-stroke engine with overspeed protection.
- Electric start (battery not included).
- Low-pressure shutoff to protect the pump in case of prime loss.
- Remote fuel connection for extended operating time.
- Manual primer, check valve, and pressure gauge.
- Equipped with the TransportGuard™ system, which provides simultaneous fuel and ignition shutoff to protect the engine from oil dilution and prevent fuel leaks during transport.
- Manual recoil starter.
- Engine and pump coupled with stainless-steel quick-release clamp.
- Low-maintenance speed increaser (oil-free).
- Optional tubular frame for easy transport or channel-base frame for vehicle mounting.

## ENGINE

|                    |                                    |
|--------------------|------------------------------------|
| Model B&S Vanguard | Type 4-stroke;<br>14 HP @ 3600 rpm |
| Ignition           | Electric                           |
| Fuel tank capacity | 1.51 US Gal. 5.74 L                |

Specifications subject to change without notice.

Vanguard™ and TransportGuard™  
are registered trademarks of Briggs & Stratton.

## TECHNICAL SPECIFICATIONS

- Briggs & Stratton engine, 14 HP, Vanguard, 4-stroke, air-cooled; electric start with optional battery and manual recoil backup. It also features a high-angle capability allowing operation on slopes up to 45 degrees.
- Cyclonic air filter.
- Pump end compatible with foam; interchangeable 4-stage pump end.
- The 4-stage pump end can also be interchanged with 2-stage pump ends to increase volume.
- Speed increaser: one-piece housing featuring a belt/pulley design that requires no maintenance.
- Transmission belt can be inspected without removing the pump or pump bracket.
- The pump end can be mounted to the speed increaser using a one-piece stainless-steel pump mounting clamp.
- Discharge check valve with side-mounted anti-drain seat.
- Liquid-filled pressure gauge with a minimum range of 0-600 PSI / 0-40 Bar.
- Integrated manual primer system.
- Available with a low-profile, anti-vibration, full wraparound frame for easy handling or a channel-base vehicle mounting frame.
- The pump delivers minimum flow and pressures as shown in the performance graph.
- The pump is equipped with a low-pressure shutoff to protect against loss of prime. Remote fuel connection for extended runtime. Manual primer, check valve and pressure gauge included.

### Wick® XP4 – 14B VP

| Part No.         | Description                                                                                                                                           |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| 71WICK100-4HA    | Wick xp4 – 14b vp pump – 14 hp briggs & stratton 4-stroke, 4-stage pump, tubular transport frame. model with protection valve.                        |
| 71WK4203-14BCVP  | Wick xp4 – 14b vp pump – 14 hp briggs & stratton 4-stroke, 4-stage pump, channel-base frame for vehicle mounting. model with protection valve.        |
| 71WK4203-14BCHVP | Wick xp4 – 14b vp pump – 14 hp briggs & stratton 4-stroke, 4-stage pump, horizontal speed increaser, channel-base frame. model with protection valve. |



### OPTIONAL

|    | Part No.     | Description                                                              |
|----|--------------|--------------------------------------------------------------------------|
| A  | 71W42-2715   | Full control panel                                                       |
| B  | 70FLPFT5     | 25 liter fuel tank                                                       |
| C  | 70FLPFL-M    | Complete fuel line (mercury)                                             |
| D  | 70FL15TPPS   | 1 ½" / 38 mm thread protector                                            |
| D2 | 70FL20TPPS   | 2" NPSH thread protector                                                 |
| E  | 70FL20DLPS10 | reinforced draftlite high-pressure suction hose 2" x 10' (3 meters) NPSH |
| F  | 70FLFV2PF    | Foot valve/filter 2"/51 mm female NPSH                                   |



Standard performance correction according  
to SAE J1349; 15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg.



**A** Pressure in Bar   **B** Pressure in PSI   **C** Flow U.S. GPM   **D** Flow liters / Min.   **E** Head Press. Feet   **F** Head Press.

## Wick XP4 - 18B fire pump

### Pump high-pressure fire pump 4-stage pump, 4-stroke engine

- Powered by an 18 HP, 4-stroke Briggs & Stratton Vanguard "V Twin" engine, air-cooled with overspeed protection.
- Electric start (battery optional) and manual recoil start.
- Automotive-style air filter and external oil filter.
- Four-stage pump compatible with foam, interchangeable with the 4-stage pump head and with the F200 two-stage pump to increase flow.
- The engine and pump are coupled with a stainless-steel quick-release clamp.
- Choice of tubular carry frame or channel-base frame for vehicle mounting.
- Includes priming pump and pressure gauge.
- Includes discharge check valve.
- Optional integrated fuel tank.



QR: Use your camera or bar code scanner and download the digital PDF version

| WEIGHT AND DIMENSIONS |           |       |
|-----------------------|-----------|-------|
| Length                | 32.0"     | 81 cm |
| Width                 | 19.5"     | 50 cm |
| Height                | 18.5"     | 47 cm |
| Weight                | 137 lbs   | 62 kg |
| Suction               | 2.0" NPSH | 50 mm |
| Discharge             | 1.5" NPSH | 38 mm |

| ENGINE                                                                    |                               |
|---------------------------------------------------------------------------|-------------------------------|
| Briggs and Stratton                                                       | 4-stroke;<br>18 HP @ 3600 rpm |
| Oil Filter                                                                | Cartridge Type                |
| Ignition                                                                  | Electronic                    |
| Performance specifications may be subject to change without prior notice. |                               |



TECHNICAL SPECIFICATIONS

- Briggs & Stratton engine, 18 HP, Vanguard “V Twin”, 4-stroke air-cooled, electric start with optional battery and manual recoil start as an alternative.
- Integrated throttle with low-maintenance belt/pulley-free design.
  - Allows transmission belt inspection without removing the pump or the pump flange.
  - Throttle installed with a single stainless-steel clamp.
- Safety lock.
- Liquid-filled gauge with a minimum range of 0–40 bar / 0 to 600 PSI.
- Full wrap-around, anti-roll frame with low profile for easy handling or mounting.
- Optional exhaust-gas primer system.

| WICK® XP4-18BS (HORIZONTAL THROTTLE MODEL, PROFILE FRAME) |                                                                                                                                          |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Part No.                                                  | Description                                                                                                                              |
| 71WK4203-18BC                                             | High-pressure pump Wick® XP4-18BS – Briggs & Stratton 4-stroke, 18 HP, 4-stage pump, profile frame for vehicle mounting.                 |
| 71WK4203-18BT                                             | High-pressure pump Wick® XP4-18BS – Briggs & Stratton 4-stroke, 18 HP, 4-stage pump, tubular frame for easy transport.                   |
| 71WK4203-18BCH                                            | High-pressure pump Wick® XP4-18BS – Briggs & Stratton 4-stroke, 18 HP, 4-stage pump, horizontal throttle accelerator with profile frame. |
| 71WK4203-18BCMI                                           | High-pressure pump Wick® XP4-18BS – Briggs & Stratton 4-stroke, 18 HP, 4-stage pump, auxiliary tank and primer, profile frame.           |



| OPTIONAL |              |                                                                           |
|----------|--------------|---------------------------------------------------------------------------|
|          | Part No.     | Description                                                               |
| A        | 71W42-2715   | Complete control board for pumps with Briggs & Stratton engine.           |
| B        | 71W42-2083   | Exhaust-gas primer for Briggs & Stratton 18 HP engine.                    |
| C        | 70FLPFT5     | 25-liter fuel tank.                                                       |
| D        | 70FLPFL-M    | Complete fuel line (Mercury).                                             |
| E        | 70FL15TPPS   | 1 ½" NPSH thread protector.                                               |
| E        | 70FL20TPPS   | 2" NPSH thread protector.                                                 |
| F        | 70FL20DLPS10 | Reinforced Draftlite high-pressure suction hose 2"/51 mm x 10' with NPSH. |
| G        | 70FL20DLPS10 | Foot valve with filter (aluminum) 1 ½"/38 mm female NPSH.                 |



# Wick XP4 – 23B fire pump

## Pump high-pressure fire pump


### 4-stage pump, 4-stroke engine



QR: Use your camera or bar code scanner and download the digital PDF version

- Powered by a 23 HP, 4-stroke Briggs & Stratton Vanguard "V Twin" air-cooled engine with overspeed protection.
- Electric start (optional battery) and manual recoil start.
- Automotive-style air filter and external oil filter.
- The engine and pump are coupled with a stainless-steel quick-release clamp system.
- Choice of tubular carry frame or channel-base frame for vehicle mounting.
- Includes manual primer and pressure gauge.
- Includes discharge check valve.
- Optional integrated fuel tank.
- Four-stage pump compatible with foam, interchangeable with the 4-stage pump head and with the 2-stage F200 pump head to increase flow.

Performance standard correction according to SAE J1349:  
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg

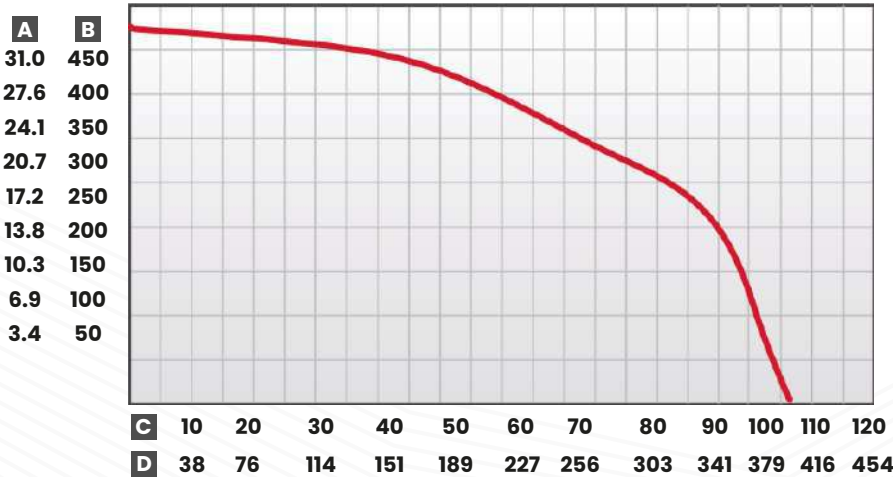

**A** Pressure in Bar   **B** Pressure in PSI   **C** Flow U.S. GPM   **D** Flow liters / Min.   **E** Head Press. Feet   **F** Head Press.


| WEIGHT AND DIMENSIONS |           |       |
|-----------------------|-----------|-------|
| Length                | 32.0"     | 81 cm |
| Width                 | 19.5"     | 50 cm |
| Height                | 18.5"     | 47 cm |
| Weight                | 137 lbs   | 62 kg |
| Suction               | 2.0" NPSH | 50 mm |
| Discharge             | 1.5" NPSH | 38 mm |

| ENGINE                                                                |                               |
|-----------------------------------------------------------------------|-------------------------------|
| Briggs and Stratton                                                   | 4-stroke;<br>23 HP @ 3600 rpm |
| Oil Filter                                                            | Cartridge type                |
| Ignition                                                              | Electronic                    |
| Performance Specifications Are Subject To Change Without Prior Notice |                               |

TECHNICAL SPECIFICATIONS

- Briggs & Stratton engine, 23 HP, Vanguard “V Twin”, 4-stroke air-cooled engine, electric start with optional battery and manual recoil start as backup.
- Integrated throttle, with a low-maintenance belt/pulley design.
- Allows control of the drive belt without removing the pump or pump head.
- Throttle mounted using a single stainless-steel clamp.
- Safety lock.
- Seat-type check valve.
- Liquid-filled glycerin gauge with a minimum range of 0–40 bar / 0–600 psi.
- Full wraparound frame, anti-roll, low-profile for easier handling or channel-base mounting.
- Optional: exhaust-gas primer system.  
Pump delivers minimum flow and pressures as shown in the performance chart.

| WICK® XP4 23BS (HORIZONTAL THROTTLE MODEL, CHANNEL-FRAME CHASSIS) |                                                                                                                    |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Part No.                                                          | Description                                                                                                        |
| 71WK4203-23BC                                                     | Wick® XP4 23BS Water Pump – Briggs & Stratton 4-stroke, 23 HP, frame for vehicle mounting.                         |
| 71WK4203-23BT                                                     | Wick® XP4 23BS Water Pump – Briggs & Stratton 4-stroke, 23 HP, 4-stage pump, tubular frame for easy transport.     |
| 71WK4203-23BCH                                                    | Wick® XP4 23BS Water Pump – Briggs & Stratton 4-stroke, 23 HP, 4-stage pump, horizontal speed throttle with frame. |
| 71WK4203-23BCMI                                                   | Wick® XP4 23BS Water Pump – Briggs & Stratton 4-stroke, 23 HP, 4-stage pump, auxiliary tank and primer, frame.     |

| OPTIONAL                                                                            |                |                                                                         |
|-------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------|
|                                                                                     | Part No.       | Description                                                             |
|  | A 71W42-2715   | Complete control panel for Briggs & Stratton engine pumps               |
|  | B 71W42-2083   | Exhaust gas suction system for Briggs & Stratton engines                |
|  | C 70FLPFT5     | 25-liter fuel tank                                                      |
|  | D 70FLPFL-M    | Complete fuel line (Mercury)                                            |
|  | E 70FL15TPPS   | 1 1/2" NPSH thread protector                                            |
|  | E 70FL20TPPS   | 2" NPSH thread protector                                                |
|  | F 70FL20DLPS10 | Draftlite reinforced suction high pressure hose 2"/51 mm x 10' c/w NPSH |
|  | G 70FLFV2PF    | Foot valve with filter (Aluminum) 1 1/2"/38mm female NPSH               |





QR: Use your camera or bar code scanner and download the digital PDF version




# Wick Motor Pump W4 Pump Head

- Designed for use with 185–210 cc 2-stroke engines or 13–24 HP 4-stroke engines.
- Mounted to the engine using a manual adjustment clamp.
- NPSH suction 51 mm (2”), NPSH discharge 38 mm (1 ½”).

| WEIGHT AND DIMENSIONS |           |        |
|-----------------------|-----------|--------|
| Length                | 11.0"     | 28 cm  |
| Width                 | 11.0"     | 28 cm  |
| Height                | 11.0"     | 28 cm  |
| Weight                | 14.7 lbs  | 6.7 kg |
| Suction               | 2.0" NPSH | 50 mm  |
| Discharge             | 1.5" NPSH | 38 mm  |

| PERFORMANCE                                                                                     |
|-------------------------------------------------------------------------------------------------|
| Performance obtained using our 23 HP Briggs & Stratton engine and a Hydro-Wick speed increaser. |
| Performance specifications may vary without prior notice.                                       |

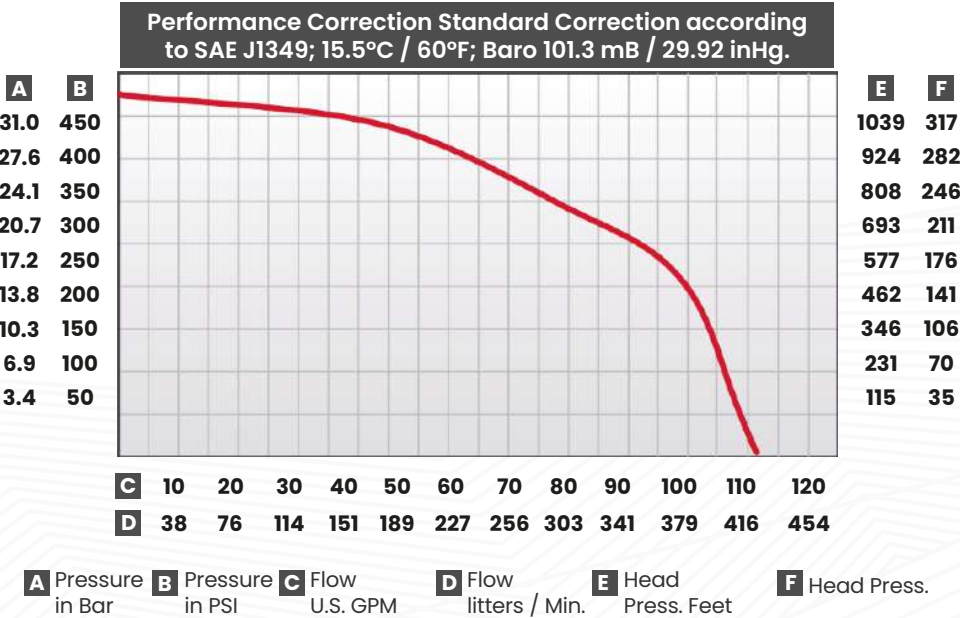

TECHNICAL SPECIFICATIONS

- The pump has four impeller stages and can be connected to a speed increaser or directly to the engine using a one-piece mounting clamp.
- Constructed in cast aluminum and the alloy is compatible with foam.
- Equipped with a grease nipple and easily disassembled for maintenance.
- The discharge includes a port for installing accessories such as a pressure gauge or primer pump.
- The pump delivers minimum flow and pressures as shown in the performance chart.



| ACCESSORIES |          |                     |
|-------------|----------|---------------------|
|             | Part No. | Description         |
| A           | 79W212   | Pump mounting clamp |

| Wick® XP4  |                                                       |
|------------|-------------------------------------------------------|
| Part No.   | Description                                           |
| 79W1216S   | Wick® XP4 pump assembly with sealed bearing           |
| 79W1216S-D | Wick® XP4 pump assembly with sealed bearing and drain |






| WEIGHT AND DIMENSIONS |           |         |
|-----------------------|-----------|---------|
| Length                | 32.5"     | 82.5 cm |
| Width                 | 19.5"     | 50 cm   |
| Height                | 24.0"     | 61 cm   |
| Weight                | 160 lbs   | 72.6 kg |
| Suction               | 3.0" NPSH | 76 mm   |
| Discharge             | 2.5" NPSH | 64 mm   |



Performance standard correction according to SAE J1349:  
15.5°C / 60°F; Baro 101.3 mB / 29.92 inHg

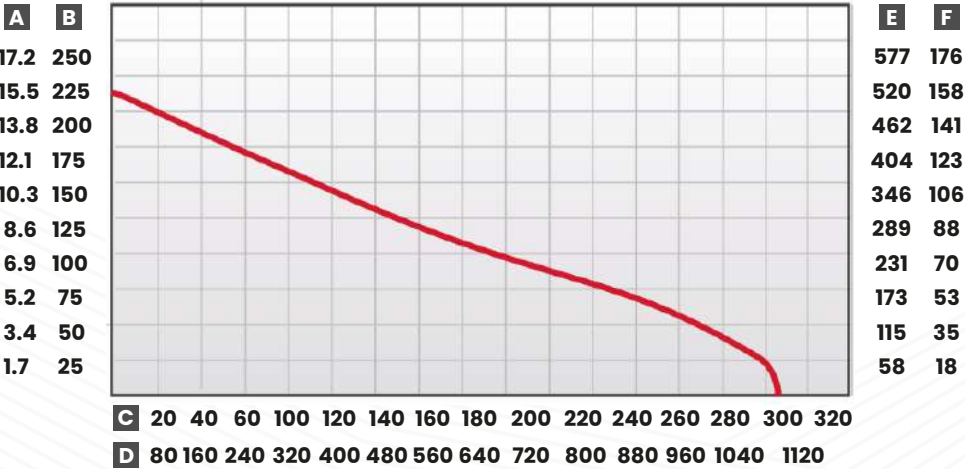

**A** Pressure in Bar   **B** Pressure in PSI   **C** Flow U.S. GPM   **D** Flow liters / Min.   **E** Head Press. Feet   **F** Head Press. Meters

# Wick Ultraflo 18B fire pump

## High-flow pump

### – 2-stage, 4-stroke engine



QR: Use your camera or bar code scanner and download the digital PDF version

#### USES:


- Powered by an 18 HP, 4-stroke Briggs & Stratton Vanguard "V Twin" air-cooled engine with overspeed protection.
- 23 HP option available.
- Electric start (optional battery) and manual recoil start.
- Automotive-type air filter and external oil filter.
- Foam-compatible pump, interchangeable with other 2-, 3-, and 4-stage pumps.
- Supplied with two built-in drain valves.
- Engine and pump coupled with a stainless-steel quick-release system.
- Low-maintenance throttle.
- Includes primer and pressure gauge.
- Includes discharge check valve.
- Standard 3" / 76 mm NPSH to NH adapter on the suction side.
- Integrated fuel tank and remote fuel connection.
- Optional low-pressure shutoff to protect the pump in case of prime loss

| ENGINE                                                                                                  |                                 |
|---------------------------------------------------------------------------------------------------------|---------------------------------|
| Model Briggs & Stratton                                                                                 | Type 4-stroke; 18 HP @ 3600 rpm |
| Oil filter                                                                                              | Cartridge type                  |
| Ignition                                                                                                | Electronic                      |
| *Weight and height include the integrated fuel tank. Performance shown using 3.0" / 76 mm suction hose. |                                 |
| *Performance specifications are subject to change without notice.                                       |                                 |



## TECHNICAL SPECIFICATIONS

- The fire pump is powered by an 18 HP Briggs & Stratton Vanguard "V Twin" 4-stroke air-cooled engine. Also available with a 23 HP engine. Electric start with optional battery and manual recoil start system.
- Low-oil indicator light on the engine.
- Two-stage foam-compatible pump end, interchangeable with other 2-, 3-, and 4-stage pump configurations.
- Two drain valves.
- Integrated throttle with low-maintenance belt/pulley design.
- Allows transmission belt control without removing the pump from the flange.
- The pump features a throttle installed with a single stainless-steel clamp, equipped with a safety lock.
- Standard suction adapter 3" / 76 mm NPSH to NH.
- Includes glycerin-filled pressure gauge, minimum range 0–40 bar / 0–600 psi.
- Includes built-in manual primer system.
- Equipped with a complete wrap-around tubular frame, anti-vibration, and low-profile design for easy handling or vehicle mounting.
- The pump must maintain minimum flow and pressure as shown in the performance chart.

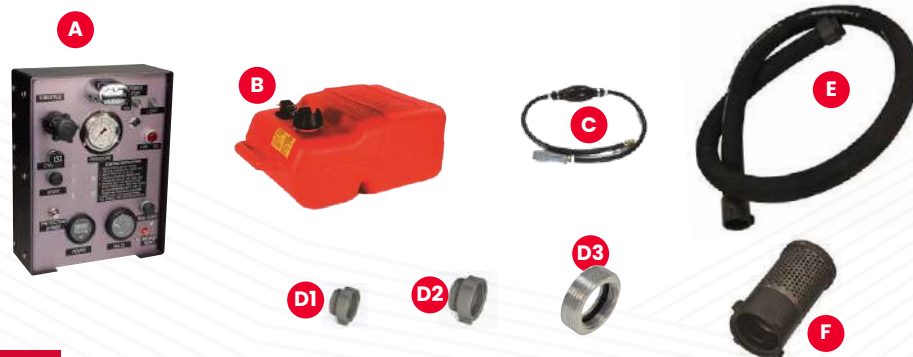

#details

## WICK® Ultraflow 18HP

| Part No.          | Description                                                                                                                                        |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 71WKFB225-18BTIT  | WICK ULTRAFLOTM pump – 18 HP Briggs & Stratton 4-stroke engine, 2-stage pump, tubular frame design for easy transport.                             |
| 71WKFB225-18BCITH | WICK ULTRAFLOTM pump – 18 HP Briggs & Stratton 4-stroke engine, 2-stage pump, channel frame with horizontal speed multiplier for vehicle mounting. |
| 71WKFB225-23BTIT  | WICK ULTRAFLOTM pump – 23 HP Briggs & Stratton 4-stroke engine, 2-stage pump, tubular frame design for easy transport.                             |
| 71WKFB225-23BCITH | WICK ULTRAFLOTM pump – 23 HP Briggs & Stratton 4-stroke engine, 2-stage pump, channel frame with horizontal speed multiplier for vehicle mounting. |


## OPTIONAL

| Part No. | Description                                                                 |
|----------|-----------------------------------------------------------------------------|
| A        | 71W42-2715 Large control panel.                                             |
| B        | 70FLPFT5 25-liter (6.6 US gal) fuel tank.                                   |
| C        | 70FLPFL-M Complete fuel line (Mercury).                                     |
| D1       | 6140NF40NM 2½" / 64 mm thread protector.                                    |
| D2       | 6148NM48PF Adapter 3" / 76 mm NPSH female to 72 mm NH male.                 |
| D3       | 70FLFV-4450 Adapter 4" / 102 mm NH male to 3" / 76 mm NH female.            |
| E        | 70FL30SHNH10 Ultraflow 3" / 76 mm suction hose, 10' / 3 m with NH fittings. |
| F        | 70FLFV64NF Foot valve/filter 4" / 102 mm.                                   |



| WEIGHT AND DIMENSIONS |           |         |
|-----------------------|-----------|---------|
| Length                | 32.5"     | 82.5 cm |
| Width                 | 19.5"     | 50 cm   |
| Height                | 24.0"     | 61 cm   |
| Weight                | 163 lbs   | 74 kg   |
| Suction               | 3.0" NPSH | 76 mm   |
| Discharge             | 2.5" NPSH | 64 mm   |

Standard performance correction according to  
SAE J1349; 15.5 °C / 60 °F; Baro 101.3 mB / 29.92 in Hg.

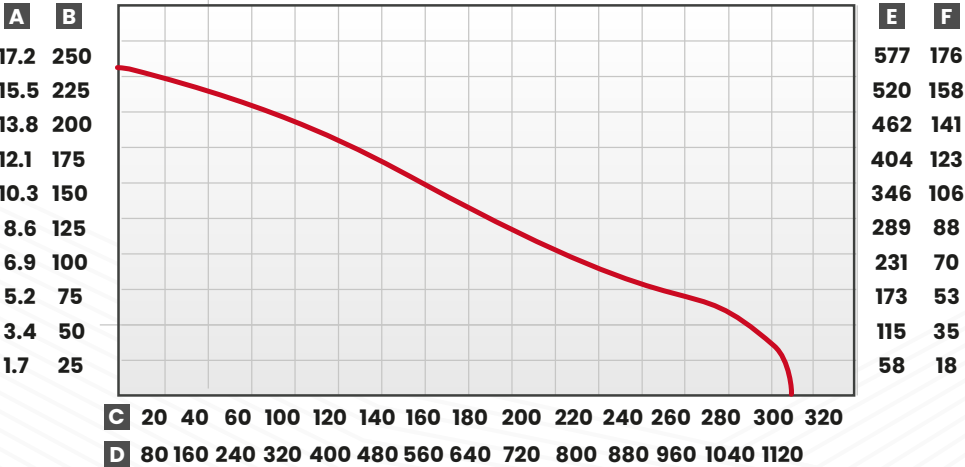

A Pressure in Bar    B Pressure in PSI    C Flow rate in U.S./min.    D Flow rate in liters/min.    E Pressure in feet of head    F Pressure in meters of height

## WICK® Ultraflo 23HP Motor Pump

### HIGH FLOW RATE 2-STAGE PUMP, 4-STROKE ENGINE



Scan the QR code  
and find more  
information about  
our product.

#### DETAILS:

- Powered by a 23 HP, 4-stroke Briggs & Stratton Vanguard 'V Twin' engine, air-cooled with overspeed protection.
- 18 HP engine.
- Electric starter (with an optional battery) and start-up with re-winding system.
- Automotive-type air filter and external oil filter.
- Engine with low oil level indicator light.
- Foam-compatible pump, interchangeable with other 2, 3, and 4-phase pumps.
- Two drain valves.
- Choice of manual tubular transport frame or profile frame for vehicle mounting.
- Standard 3"/76 mm NPSH to NH adapter at the inlet.
- Integral fuel tank (6.95 Qt/6.6 l) and remote fuel connection.
- Check valve included.
- Available with low pressure seal to protect the pump in case of loss of priming.

| ENGINE                                                                                              |                               |
|-----------------------------------------------------------------------------------------------------|-------------------------------|
| Briggs and Stratton                                                                                 | 4-stroke;<br>23 HP @ 3600 rpm |
| Oil filter                                                                                          | Cartridge type                |
| Ignition                                                                                            | Electronic                    |
| *Weight and height include built-in fuel tank.<br>Performance shown using a 3.0"/76 mm suction hose |                               |
| *Performance specifications may be subject to change without prior notice                           |                               |

TECHNICAL SPECIFICATIONS

- Integrated speed throttle, with a maintenance-free belt/pulley design.
- Belt drive control without removing the pump or the pump flange.
- Speed throttle installed with a single stainless steel clamp, equipped with a safety lock.
- Includes glycerin-filled pressure gauge with a minimum range of 0-40 bar/0 to 600 PSI.
- Built-in manual priming system.
- Equipped with a full wraparound, roll-over protective, low-profile frame for easy handling or a mounting frame.
- Optional: Exhaust gas priming system.
- The motor pump shows a minimum flow and pressures as shown in the performance chart.



OPTIONAL

|    | Part #       | Description                                         |
|----|--------------|-----------------------------------------------------|
| A  | 71W42-2715   | Large control panel                                 |
| B  | 70FLPFT5     | 25-liter fuel tank.                                 |
| C  | 70FLPFL-M    | Complete fuel line (Mercury).                       |
| D1 | 6140NF40NM   | Thread protector 2 1/2" / 64 mm.                    |
| D2 | 6148NM48PF   | Adapter 3" / 72 mm male NH x 3" / 76 mm female NPSH |
| D3 | 70FLFV-4450  | Adapter 4" / 102 mm male NH x 3" / 76 mm female NH. |
| E  | 70FL30SHNH10 | Ultraflow suction hose 3"/76 mm NH x 3.05 m (10')   |
| F  | 70FLFV64NF   | Foot valve with filter 4.0"/102 mm.                 |



WICK® Ultraflow 23HP

|   | Part #            | Description                                                                                                                                                                       |
|---|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A | 71WKFB225-23BT    | WICK ULTRAFLO Motor Pump. It includes: Briggs & Stratton 23 HP engine, electric start, 2-phase pump, manual priming, tube frame.                                                  |
| B | 71WKFB225-23BC    | WICK ULTRAFLO Motor Pump. It includes: Briggs & Stratton 23 HP engine, electric start, 2-phase pump, manual priming, profile frame                                                |
| C | 71WKFB225-23BTIT  | WICK ULTRAFLO Motor Pump. It includes: Briggs & Stratton 23 HP engine, electric start, 2-phase pump, manual primer, integral fuel tank, tube frame.                               |
| D | 71WKFB225-23BCITH | WICK ULTRAFLO Motor Pump. It includes: Briggs & Stratton 23 HP engine, electric start, 2-phase pump, manual primer, integral fuel tank, horizontal speed throttle, profile frame. |





QR: Use your camera or bar code scanner and download the digital PDF version



FORESTRY  
HOSES

## Wick Fire Pack

Kit consisting of a backpack tank, portable pump, and hoses with nozzle, designed for forest fire attack operations.

### USE AND WORKING TECHNIQUES

- Can be used through two work techniques that allow deployment by a single operator:
- In a pump relay operation, from a Rapid Attack Unit mounted on a pickup or another vehicle used in suppression with hose lines, connecting to the suction of the Wick 100M pump. This increases pressure and extends the effective water reach.
- When water sources are generally inaccessible by vehicle (such as streams, rivers, irrigation canals, water bodies, or reservoirs like panel, folding, collapsible, or self-supporting tanks), the pump delivers water through the hose lengths included in the kit. These operations are supported by the Wick 100M or Wick 375 pumps.

## COMPONENTS

### HOSES:

Mercedes Textiles hoses, compared to their competitors, have up to 60% less pressure loss per section. As a result of their manufacturing process, they ensure good flow and pressure, making the pumps more efficient.



One section of synthetic self-wetting forest hose, Mercedes Textiles brand, Firebreak II model, 1" by 30 m with quick coupling. Burst Pressure: 900 PSI.



Two sections of dry forest hose, Mercedes brand, Forest Guard 1.5" model, 30 m each with quick coupling. Burst Pressure: 1000 PSI.



### HOSE TRANSPORT BAG:

Manufactured in canvas material, with a front opening that allows hose unloading one by one without removing the backpack. It also allows carrying coiled hoses, clothing, food, drinks, helmets, or other accessories.



### WICK 375 PUMP:

4-STAGE HIGH-PERFORMANCE PUMP, operated by a 2-stroke engine; 10 HP (210 cc) engine and pump reaching 400 PSI pressure and a maximum flow of 379 liters per minute. This pump is specifically designed for fighting forest fires: four-stage pump compatible with foam use.



### INFOREST NOZZLE 309:

INFOREST nozzle model 309, 1" (25 mm), made of anodized aluminum. Simple and resistant to temperature changes and impacts. Features adjustable flow, with jet or fog mode via a rotating tip. Flow rate: 37–115 liters per minute.



### ADJUSTMENT WRENCH:

Includes two adjustment wrenches used for different types of hose couplings.

### FORESTRY RIGID PACK:

Its ergonomic design, inspired by high-performance military backpacks, provides the necessary comfort for transporting heavy equipment over long periods.

Its fully aluminum structure offers an excellent strength-to-weight ratio. Its longitudinal design provides rigidity and ensures resistance to twisting and rotational efforts. Structural reinforcements offer stability and load capacity without collapse risks.

It also features a wide contact-surface harness that distributes weight better, preventing back injuries and premature fatigue. The harness is built with high-quality materials that reduce contact stress after long workdays, and the fabrics used are certified under NFPA 701 fire-resistance testing.



### WICK 100M PUMP:

ULTRALIGHT AND HIGH-PERFORMANCE PUMP with a weight of 8.4 kg and powered by a 2-stage, 2.4 CV / 1.8 kW (47 cc) engine delivering a maximum pressure of 100 PSI and a maximum flow of 333 liters per minute. This pump is specifically designed for forest firefighting: single-stage pump compatible with foam use.

It includes an integrated fuel tank providing 40 minutes of runtime, with the possibility of adding an auxiliary tank to extend autonomy to 24 hours. The pump can operate in any position or inclination and features 1.5" (38 mm) suction and discharge.

Equipped with a clutch system that engages the pump when accelerating but disengages it at idle, saving water—a generally scarce resource in field operations.







# WILDFIRE



## ► TOOLS


### INFOREST SRL

Instagram @inforest\_incendiosforestales Facebook Inforest WhatsApp +54 (0) 3547-430529/406693  
Email ventas@inforest.com.ar comex@inforest.com.ar Website www.inforest.com.ar

### INFOREST IBÉRICA

Instagram @inforestiberica Facebook Inforest WhatsApp +34 681 314646  
Email info@inforestiberica.com Website www.inforestiberica.com



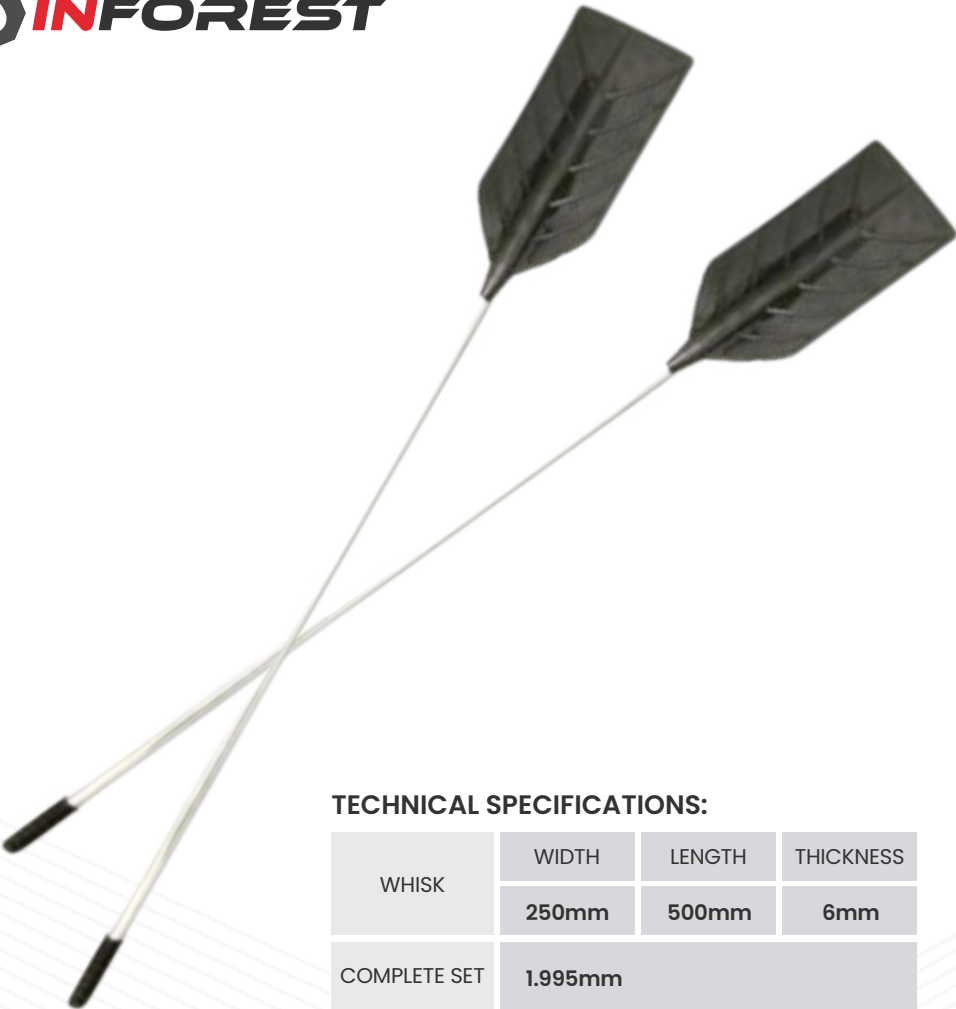

TECHNICAL SPECIFICATIONS:

| WHISK        | WIDTH   | LENGTH | THICKNESS |
|--------------|---------|--------|-----------|
|              | 250mm   | 500mm  | 6mm       |
| COMPLETE SET | 1.995mm |        |           |
| WEIGHT       | 1,8 Kg. |        |           |

# Aluminum Fire Swatter with Rigid Handle

USES:

A tool designed to extinguish fires through smothering (air displacement). It consists of a metallic handle or shaft ending in a flapper made of self-extinguishing rubber.

The handle and paddle are assembled through a vulcanization process, resulting in a single, inseparable piece that ensures comfort and durability during use.

TECHNICAL SPECIFICATIONS:

Handle:

- Made of hard aluminum tubing.
- Does not rust.
- Smooth finish.
- Outer diameter: 25 mm.
- Inner diameter: 21 mm.
- Exceptional break resistance.
- Shape recovery after bending.

Flapper:

- Made of 6 mm thick self-extinguishing synthetic rubber.
- Entire flapper: reinforced with fabric for increased tear resistance. Critical areas feature double reinforcement.
- One side is branched to extend service life.
- Greater rigidity.
- Thicker outer edges.
- Inner steel reinforcement.

Grip:

- Ergonomic rubber handle for more comfortable use.



QR: Use your camera or bar code scanner and download the digital PDF version



TECHNICAL SPECIFICATIONS:

| PADDLE               | WIDTH:   | LENGTH: | THICKNESS: |
|----------------------|----------|---------|------------|
|                      | 250 mm   | 500 mm  | 6 mm       |
| FULL ASSEMBLY        | 1.950 mm |         |            |
| FULL ASSEMBLY FOLDED | 1.280 mm |         |            |
| WEIGHT               | 1,8 Kg.  |         |            |

# Aluminum fire swatter with telescopic handle



QR: Use your camera or bar code scanner and download the digital PDF version

It is a tool designed to extinguish fire by smothering (displacing air), consisting of a metal handle or telescopic pole, ending in a self-extinguishing rubber paddle.

## Telescopic Handle:

- Aluminum tube.
- Corrosion-resistant.
- Telescopic screw-type mounting system.
- Red color for increased visibility.
- Outer diameter: 30 mm.
- Inner diameter: 25 mm.
- Exceptional break resistance.
- Recovers its shape after bending.

## Paddle:

- Fire-resistant self-extinguishing synthetic rubber, 6 mm thick.
- The entire paddle is reinforced with fabric for higher tear resistance. Critical areas have double reinforcement.
- One side has a ribbed texture to extend service life.
- Increased stiffness.
- Thicker outer edges.
- Internal steel reinforcement.

## Grip:

- Ergonomic rubber handle.



## Ave brush hook



QR: Use your camera or bar code scanner and download the digital PDF version

### USES

Exclusive design by Inforest. The ave brush hook combines multiple functions in a single tool, merging the characteristics of a curved machete, a billhook, and a straight axe. This is achieved by distributing the cutting edges on the curved front ridge and the straight rear ridge, while the upper section is designed to push and lift branches with ease.

Its main use is to break down vegetation, cut shrubs, thin branches, and open paths through medium and low-height vegetation.

Recommended for tasks that require efficiency in dense vegetation. Additionally, it becomes an essential support tool for chainsaw operators.

### DESIGN AND MATERIALS

The blade features internal cuts that optimize the tool's overall weight, while the wooden handle is designed to provide an ergonomic grip during use.

|        |        |
|--------|--------|
| WEIGHT | 2,2 Kg |
| LENGTH | 1,15 m |
| HANDLE | Wood   |







## Pulaski Axe with fiberglass handle



QR: Use your camera or bar code scanner and download the digital PDF version

**USES:**

It combines an axe and an adze in a single head. It is especially useful for building firelines, as it allows digging and scraping down to mineral soil, as well as cutting and opening lines through vegetation.

**MATERIALS:**

Tool manufactured in forged steel with differentiated heat treatments: harder edge zone (50–55 RC) and a softer eye zone where the handle is inserted (30–35 RC). This hardness difference provides edge toughness for longer service life, and ductility in the eye area to absorb impacts without compromising tool integrity.

The handle, made with an injected fiberglass core and rubber grip, minimizes vibration transmission to the user during impact.

|          |                                                                  |
|----------|------------------------------------------------------------------|
| WEIGHT:  | Max 2.950 kg (+/- 0.10 kilograms)                                |
| LENGTH:  | 1,2 m                                                            |
| HANDLE:  | Fiberglass with rubber grip. Dielectric insulation 50,000 volts. |
| MATERIAL | 1045 steel                                                       |



# Firefighter Axe with Fiberglass Handle – Light Model



Scan the QR code and find more information about our product.

USES:

Lightweight tool for cutting, prying, and striking.

DESIGN AND MATERIALS

Axe head made of forged steel, heat-treated to provide edge hardness (50–55 RC) while maintaining ductility at the eye where the handle is inserted (30–35 RC).

Lighter than the traditional firefighter axe-maul.

Fiberglass handle with dielectric insulation up to 50,000 volts.

|          |                                 |
|----------|---------------------------------|
| WEIGHT   | 2,5 kg                          |
| LENGTH   | 900 mm                          |
| HANDLE   | Overmolded fiberglass with grip |
| MATERIAL | 1045 steel                      |



Scan the QR code  
and find more  
information about  
our product.

## Big John Pulaski

High-performance combination tool, made of high-strength steel. Ideal for initial attack teams, forestry brigades and rural crews.

Unlike the traditional forged Pulaski, it incorporates a head built with Hardox 450 plates, which gives it greater resistance to wear, sharper edges and easier maintenance.

### USES:

- Construction of firebreak lines; removal of vegetation, roots, trunks and topsoil until reaching the mineral soil.
- Opening of trails and accesses in closed bush areas.
- Trenching and removal of combustible material in wet, sandy or compacted soils.

### MATERIALS:

- Head made of high-strength steel plates (Hardox 450)
- Combined design between a sturdy hoe and an axe-type cutting blade, allowing multiple functions in a single tool.
- Over extruded fiberglass handle. Certified for insulation and di-electric resistance up to 50 thousand volts.

### TECHNICAL SPECIFICATIONS:

|        |          |
|--------|----------|
| WEIGHT | 2,100 Kg |
| WIDTH  | 330 mm   |
| LENGTH | 930 mm   |







## Bowie 12"

Tool for forest cutting and clearing work, as well as for opening access paths and facilitating crew movement.

### MATERIALS:

- Manufactured in laminated steel, with heat treatment, polished and sharpened.
- Designed to withstand bending loads and impact against hard surfaces.
- Its low weight improves maneuverability.

### SHEATH:

- The bowie includes an ambidextrous textile sheath, reinforced in the blade contact areas. This sheath can be secured to the user's belt or leg.

### OPTIONAL

- Sharpening file included in the sheath.



QR: Use your camera or bar code scanner and download the digital PDF version

|                    |              |
|--------------------|--------------|
| WEIGHT             | 0,34 kg      |
| LENGTH WITH SHEATH | 430 mm       |
| SHEATH TYPE        | Ambidextrous |



## Bowie 20"

Tool designed for cutting and forest-clearing work, as well as for opening access paths and facilitating personnel movement.

### MATERIALS:

- Made of laminated steel, heat-treated, polished and sharpened.
- Designed to withstand flexion loads and impact on hard surfaces.
- Its low weight improves maneuverability.

### SHEATH

- The Bowie includes an ambidextrous textile sheath, reinforced in the blade contact areas. This sheath can be secured to the user's waist or leg.


### OPTIONAL

- Sharpening file included in the sheath.



QR: Use your camera or bar code scanner and download the digital PDF version

|                    |              |
|--------------------|--------------|
| WEIGHT             | 0,5 kg       |
| LENGTH WITH SHEATH | 660 mm       |
| TYPE OF SHEATH     | Ambidextrous |

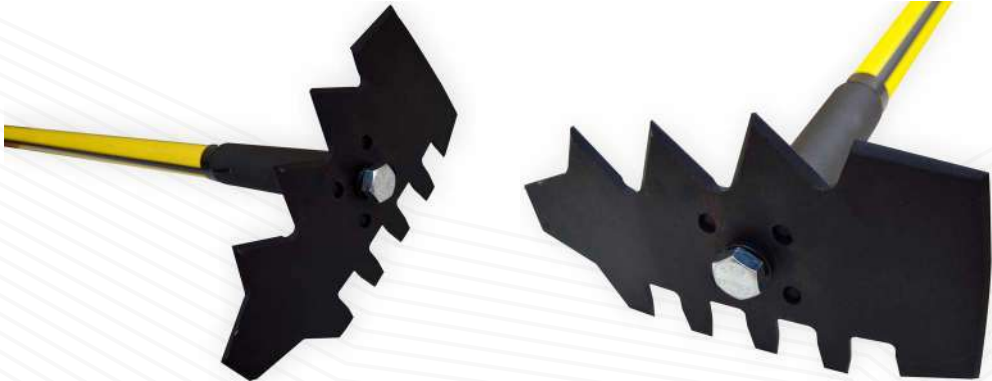

**INFOREST SRL:** [www.inforest.com.ar](http://www.inforest.com.ar)  
[ventas@inforest.com.ar](mailto:ventas@inforest.com.ar) | [comex@inforest.com.ar](mailto:comex@inforest.com.ar)  
**INFOREST IBÉRICA:** [www.inforestiberica.com](http://www.inforestiberica.com)  
[info@inforestiberica.com](mailto:info@inforestiberica.com)

# Derki combined rake with fiberglass handle



QR: Use your camera or bar code scanner and download the digital PDF version

## USES:

The tool combines the functions of a Brush Rake, McLeod Rake, Pulaski Shovel, and Wide Pick. It offers multiple usage options without needing to switch tools.

## TECHNICAL SPECIFICATIONS:

- Made of alloy steel, resistant to wear, eliminating the need for additional heat treatments.
- Hardness from 44 to 46 HRC.
- Blade finished with baked enamel paint for greater protection.
- Ergonomic handle design of 1.20 m.

## HANDLE:

- Fiberglass handle with rubber grip.
- Reinforced with resin and coated with HDPE (high-density polyethylene).
- Includes anti-slip zones that reduce vibration transmission to the user.
- Dielectric insulation rated to 50,000 volts.

|         |        |
|---------|--------|
| WEIGHT: | 2,1 kg |
|         | 1,2 m  |





## Digital Anemometer



QR: Use your camera or bar code scanner and download the digital PDF version

This instrument collects data on variables such as temperature, relative humidity, dew point temperature, wet bulb temperature, wind speed, and air volume.

### TECHNICAL SPECIFICATIONS:

- Digital anemometer that measures temperature, relative humidity, dew point temperature, wet bulb temperature, wind speed, and air volume.
- Portable and professional instrument with a large backlit LCD screen and unit conversion function.
- Reading hold functions, maximum and minimum value measurement, among others.
- Low battery indicator and real-time data transfer via USB.
- Backlit display for easy reading in low-light conditions.
- Automatic shut-off or energy saving.
- Unit selection: °C/°F.

### GENERAL CHARACTERISTICS:

|               |                   |
|---------------|-------------------|
| DIMENSIONS:   | 17 x 8.5 x 4.5cm  |
| DISPLAY:      | 1.75"             |
| NET WEIGHT:   | 200 g (0.44lb)    |
| POWER SUPPLY: | 1 x 9 V 9 V 6F 22 |





# Double-bit axe with fiberglass handle

USES:

It is an ideal tool for clearing areas affected by fire.

MATERIALS:

Fiberglass handle with a rubber grip that improves hold and reduces axe-impact vibrations.

The axe head is forged steel and undergoes heat treatment to provide hardness in the cutting-edge zone (50-55 RC) while maintaining ductility in the eye area where the handle is inserted (30-35 RC).

The head allows the use of different bevel angles on each blade to adapt to different types of wood.



QR: Use your camera or bar code scanner and download the digital PDF version

|          |                                                                  |
|----------|------------------------------------------------------------------|
| WEIGHT:  | Maximum 2.950 kg (+/- 0.10 kilograms).                           |
| LENGTH:  | 930 mm.                                                          |
| HANDLE:  | Fiberglass with rubber grip. Dielectric insulation 50,000 volts. |
| MATERIAL | 1045 steel.                                                      |



# Drip Torch – 1 Liter

USES:

With an aluminum body, this handheld torch is used in indirect attacks to create controlled fire lines in a comfortable and safe way, as it allows regulating the amount of fuel being released.

Easy to disassemble, its design allows storing the burner inside the container, making transport and storage easier and safer.

This lightweight torch integrates perfectly with the Day Pack backpack system.

AVAILABLE ACCESSORY

Carrying handle

WILDLAND FIREFIGHTING

1-Liter Drip Torch

|             |          |                   |       |
|-------------|----------|-------------------|-------|
| CAPACITY:   | 1 liter  | STORED HEIGHT:    | 28 cm |
| DRY WEIGHT: | 0,750 gr | OPERATING HEIGHT: | 46 cm |

Certified by the Argentine Naval Prefecture



QR: Use your camera or bar code scanner and download the digital PDF version





## Drip Torch – 5 Liters

### USES:

Used in indirect attacks to create controlled fire lines safely and comfortably. It allows burning large areas without refueling and regulates the amount of fuel released.

### DESIGN AND MATERIALS:

- Easy to disassemble, its design allows storing the burner inside the container, ensuring safe transport and storage.
- Made of aluminum and coated with baked polyester paint resistant to hydrocarbons, guaranteeing excellent finish and extending its protection and durability.

### AVAILABLE ACCESSORY

Mount for attaching to the vehicle

### WILDLAND FIREFIGHTING

#### 5-Liter Drip Torch

|             |                       |                   |       |
|-------------|-----------------------|-------------------|-------|
| CAPACITY:   | 5 liters              | STORED HEIGHT:    | 35 cm |
| DRY WEIGHT: | 2,26 kg. (+- 0,10 Kg) | OPERATING HEIGHT: | 63 cm |

Certified by the Argentine Naval Prefecture



QR: Use your camera or bar code scanner and download the digital PDF version





QR: Use your camera or bar code scanner and download the digital PDF version

## Fire rake

### USES

- Ideal for widening, consolidating, and clearing terrain down to mineral soil, especially when vegetation is firmly adhered to the substrate.
- Its main use focuses on creating and expanding firelines or cutoff lines. It is also useful for cleaning firelines during mop-up operations.

### DESIGN AND MATERIALS

- The Mowing Rake is equipped with four self-sharpening teeth, subjected to a heat-treatment process to increase their resistance, delivering high performance on hard terrain and in areas with high mineral load.
- Lightweight and robust fiberglass handle.

|        |                                                                |
|--------|----------------------------------------------------------------|
| WEIGHT | 2,2 Kg                                                         |
| LENGTH | 1,45 m                                                         |
| TEETH  | 4                                                              |
| HANDLE | Fiberglass with rubber grip. Dielectric insulation 50,000 volt |





|                  |                                                                       |
|------------------|-----------------------------------------------------------------------|
| WEIGHT           | 2,3 Kg                                                                |
| LENGTH           | 1,2 m                                                                 |
| BLADE DIMENSIONS | 285 mm x 235 mm                                                       |
| HANDLE           | Fiberglass with rubber grip.<br>Dielectric insulation<br>50,000 volts |



## Fire Rake Mc Leod with fiberglass handle



QR: Use your camera or bar code scanner and download the digital PDF version

### USES

The McLeod Rake integrates two functions that complement each other. It is an essential tool for indirect attack in wildfire operations; one side features 6 tines with a reinforcing rib for added strength, and the opposite side features a sharpened hoe blade ideal for consolidating firelines and widening them.

Its use is recommended for removing large amounts of vegetation on the ground and raking combustible material down to mineral soil.

### DESIGN AND MATERIALS

It features a detachable handle that fits the blade, which can also be used with the Derki Combination Rake.

The McLeod blade is manufactured from high-wear alloy steel, eliminating the need for additional heat treatments that could create stress in the material.

Hardness rating of 44 to 46 HRC. Finished with a baked-on coating.

Ergonomically designed handle with a length of 1.20 m (47"). It consists of a hollow, straight tubular handle made of fiberglass reinforced with resin and extruded with HDPE (high-density polyethylene), with anti-slip grip zones. This design reduces vibration transfer to the user and is compatible with other tools in our product line.





# Fire swatter with Fiberglass Handle



QR: Use your camera or bar code scanner and download the digital PDF version

## USES:


- Fire suppression tool used to strike the fire line, displacing air to extinguish flames.
- The use of the fire beater is most effective on soft, flat terrain, such as grasslands, where there are no rocks.
- Its use is recommended together with a water backpack, as both tools complement each other: when water reduces the flame to a safe size, the fire beater completely extinguishes it.

## DESIGN AND MATERIALS:

- Vulcanized rubber palm reinforced with two textile meshes, providing tear resistance.
- Tubular, hollow, and straight fiberglass handle, reinforced with resin and extruded HDPE (high-density polyethylene).
- Ergonomic handle with a length of 1.80 m.

|               |         |                  |                                                                   |
|---------------|---------|------------------|-------------------------------------------------------------------|
| WEIGHT:       | 2,8 kg. | PALM DIMENSIONS: | 300 x 400 x 5 mm.                                                 |
| TOTAL LENGTH: | 2,20 m. | HANDLE:          | Fiberglass with rubber grip<br>Dielectric insulation 50,000 volts |

Optional: Handles available in 1.20, 1.50, and 1.80 meters.

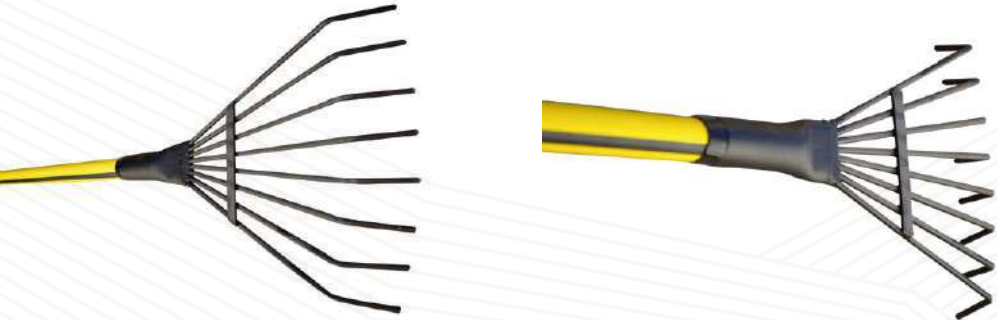

# Firebroom Rake

## USES

- Used for ground clearing, allowing efficient removal of light vegetation and leaving the mineral soil exposed.
- Ideal for removing leaf litter and pruning debris in pine forests and plantations, helping break fuel continuity and reduce fire risk.

## DESIGN AND MATERIALS

- Its rounded steel tines form a functional and reliable tool for field work.
- The fiberglass handle, lightweight and impact-resistant, complements the tool.
- The baked-on painted finish ensures durability, providing resistance to both wear and heat.

|        |                                                                  |
|--------|------------------------------------------------------------------|
| WEIGHT | 2,2 Kg                                                           |
| LENGTH | 1,9 m                                                            |
| TINES  | 8 mm x 6,5 mm                                                    |
| HANDLE | Fiberglass with rubber grip. Dielectric insulation: 50,000 volts |



QR: Use your camera or bar code scanner and download the digital PDF version





# Forestry Wrench



QR: Use your camera or bar code scanner and download the digital PDF version

## INFOREST WRENCH

### TECHNICAL SPECIFICATIONS:

— Nodular cast iron with red epoxy coating.



## COUPLING WRENCH

### TECHNICAL SPECIFICATIONS:

— Made of aluminum alloy, used for 38 mm (1 1/2") and 51 mm (2") couplings. Can be used on both quick-connect and threaded fittings.





Scan the QR code and find more information about our product.

# Hilara Wildland Hoe

Hoe-type hand tool, ideal for digging, loosening soil, and creating wildland fire lines. It has a square-shaped head set at a 45-degree angle to facilitate the firefighter's task.

## TECHNICAL FEATURES:

- Handle: Made of fiberglass, with anti-slip grip, reinforced with resin and HDPE extrusion (high-density polyethylene).
- The hollow design reduces weight and prevents vibration transmission to the user. Interchangeable with other Inforest hand tools. One end features a small steel shaft used to fasten the blade to the handle via a hex-head bolt.
- Dielectric resistance: up to 50,000 Watts

## USES:

- Used for digging, loosening soil, and creating fire lines.

## DESIGN

(innovation or product highlight)

The blade features two transverse working angles of 15° and one longitudinal angle of 25°, providing an optimal working position and allowing the user to move more material (soil, rocks, branches, etc.) with less effort, facilitating fire line creation and soil movement.

## TECHNICAL INFO:

|          |                |
|----------|----------------|
| MATERIAL | Boron Steel    |
| LENGTH   | 1,2 m          |
| HEIGHT   | 0.202 m        |
| WIDTH    | 0.197 m        |
| WEIGHT   | 2.3 Kg         |
| COLOR    | Textured black |



**INFOREST SRL:** [www.inforest.com.ar](http://www.inforest.com.ar)  
[ventas@infocrest.com.ar](mailto:ventas@infocrest.com.ar) | [comex@infocrest.com.ar](mailto:comex@infocrest.com.ar)  
**INFOREST IBÉRICA:** [www.inforestiberica.com](http://www.inforestiberica.com)  
[info@infocrestiberica.com](mailto:info@infocrestiberica.com)



QR: Use your camera or bar code scanner and download the digital PDF version

## Shrubbing tool

### USES

The billhook is designed for overhead clearing along firelines and defense trenches, eliminating the vertical continuity of fuels.

The sickle-type blade features a curved edge that allows cutting through friction.

### DESIGN AND MATERIALS

The head is specially balanced to optimize handling, reducing the risk of accidents due to involuntary deviations.

The blade is manufactured from high-strength alloy steel, finished with baked enamel paint.

Hardness rating: 44 to 46 HRC.

The handle can be adjusted, reaching a length of up to 1.8 m, achieving a total length of 2.1 m with the blade. It can also be configured with shorter lengths, becoming a machete-type hand tool according to the user's needs.

|              |                                                                         |
|--------------|-------------------------------------------------------------------------|
| WEIGHT       | maximum 1.78 kilograms (+- 0.10 kilograms)                              |
| TOTAL LENGTH | maximum length 2.10 m (+- 5%)                                           |
| HANDLE       | fiberglass handle with rubber grip. dielectric insulation 50,000 volts. |



QR: Use your camera or bar code scanner and download the digital PDF version

# SIMPLE FIRE SWATTER

USES:

- Used to control and/or extinguish fire through smothering, by eliminating oxygen with strikes to the burning material or its surroundings.
- Ideal for terrain with irregular relief, rocky soils, or dense vegetation.

MATERIALS:

- Short fiberglass handle.
- Vulcanized rubber flap.
- Fiberglass handle with dielectric insulation rated up to 50,000 volts.

|               |          |                  |        |
|---------------|----------|------------------|--------|
| WEIGHT:       | 1,875 Kg | NUMBER OF FLAPS: | 1      |
| TOTAL LENGTH: | 1,25 m   | FLAP LENGTH:     | 600 mm |







QR: Use your camera or bar code scanner and download the digital PDF version



## Square Hoe

**USES:**

Used for digging, moving soil, and creating fire lines.

**HANDLE:**

Ergonomic and lightweight design. Features non-slip zones that improve grip and reduce vibration transmission to the user.

**Technical characteristics:**

- Tubular handle made of fiberglass, reinforced with resin and extruded HDPE (high-density polyethylene).
- One end includes a small steel fitting painted with epoxy coating, used to attach the blade through a hex-head bolt.

**BLADE:**

Made of boron steel sheet, hardness 45 HRC. Features three 45° sharpened edges and two 15° longitudinal folds to improve rigidity.

- Finish:** baked epoxy micro-textured black paint.
- Dimensions:** 205,3 x 209 mm.
- Weight:** 1 kg.

|               |                     |
|---------------|---------------------|
| TOTAL WEIGHT: | 2,5 kg (+- 0,10 kg) |
| TOTAL LENGTH: | 129 mm              |



|        |         |      |                               |
|--------|---------|------|-------------------------------|
| WEIGHT | 2,2 kg. | CAPE | Fiberglass extruded with HDPE |
| LENGTH | 1,2 m.  |      |                               |

# Triangle Hoe

USES:

Used for digging, moving soil, and creating fire lines. This tool is made up of a steel plate with a conical steel socket welded to its center, allowing the plate to be fitted perpendicularly onto an ergonomic fiberglass handle.

HANDLE:

Ergonomic design with a length of 1.20 m. Hollow, straight tubular handle made of fiberglass reinforced with resin and extruded HDPE (high-density polyethylene). Features non-slip zones that improve grip and reduce vibration transmission to the user.

BLADE:

Made of 6 mm thick wear-resistant alloy steel plate, with a width of 142 mm at the left end, 36 mm at the right end, and a length of 233 mm.

Edge: Both ends are sharpened with a single 45° bevel along their entire length.

Hardness: The blade material is an alloy steel highly resistant to wear, eliminating the need for additional heat treatment that could cause stress in the material. Hardness ranges from 44 to 46 HRC.

FINISH:

All metal parts of the blade and socket are coated with baked micro-textured polyester paint.



QR: Use your camera or bar code scanner and download the digital PDF version



QR: Use your camera or bar code scanner and download the digital PDF version



## Forestry Shovel

Tool used in prescribed burns, firebreak construction, hotspot control, and mop-up operations.

### MATERIALS:

The forest shovel is made from a forged steel sheet with a heart-shaped blade and self-sharpening edges thanks to its geometric characteristics.

Tool compliant with US Forest Service regulations, featuring specific attack-angle and curvature properties, along with standardized blade dimensions.

Surface coated with baked enamel paint.

Blade designed with a step area that allows the user to apply pressure with the foot without damaging the boot sole.

Wooden handle that provides a secure grip and helps prevent slipping.

|         |        |
|---------|--------|
| WEIGHT: | 2,3 kg |
| LENGTH: | 1,2 m  |
| HANDLE: | Wood   |





# Wildland Fire Shovel with Fiberglass Handle



QR: Use your camera or bar code scanner and download the digital PDF version

## USES:

- Opening and widening firelines. Digging and removing vegetation.
- Eliminating combustible material and helpful for interrupting fire spread.

## DESIGN & MATERIALS

### BLADE

- Forged steel, heart-shaped with self-sharpening edges.
- Baked enamel finish for high protection against wear and heat.
- Integrated step so the user can apply pressure with the foot without damaging boot soles.

### FIBERGLASS HANDLE

- The fiberglass handle replaces the traditional wooden handle, improving impact resistance, reducing weight, and increasing durability.

- Ergonomic design.
- Hollow tubular, straight handle, made of fiberglass reinforced with resin and extruded with HDPE (high-density polyethylene).
- Anti-slip grip zones.
- Dielectric insulation up to 50,000 volts.

### CERTIFICATIONS

- It meets U.S. Forest Service regulations, with specific requirements for angle of attack, curvature, and dimensions to optimize performance.

|        |            |
|--------|------------|
| WEIGHT | 2,3 Kg     |
| LENGTH | 1,3 m      |
| HANDLE | Fiberglass |





# WITCH SWATTER

USES:

- Smothering tool that operates similarly to a fire swatter, extinguishing flames by eliminating oxygen when striking directly over the fireline.
- Its use is recommended in terrain with irregular relief, rocky soils, or dense vegetation, where working with a standard fire swatter becomes uncomfortable.

MATERIALS:

- Manufactured with vulcanized rubber strips reinforced with two textile meshes to provide greater tear resistance.
- The short fiberglass handle facilitates tool manipulation in dense vegetation or difficult-access areas.
- Handle certified for dielectric resistance up to 50,000 volts.

|              |        |                  |    |
|--------------|--------|------------------|----|
| WEIGHT       | 2,2 Kg | NUMBER OF STRIPS | 11 |
| TOTAL LENGTH | 1,3 m  |                  |    |



QR: Use your camera or bar code scanner and download the digital PDF version



## Zonda 2T Blower

High-airflow portable backpack blower

### USES

- Clearing and cleaning grounds by expelling high-velocity air.
- Removal of leaves, branches, debris, and waste in open spaces.
- Emergency and firefighting operations: cleanup of fire-affected areas.
- Removing obstacles that hinder access and rescue operations.
- Clearing materials without direct contact with hazardous substances.

### DESIGN AND MATERIALS

- Air-cooled single-cylinder 2-stroke engine, integrated into a compact housing that promotes heat dissipation and protection of internal components.
- Backpack-style unit with ergonomic design, featuring a structural frame and harness with adjustable straps and a rear cushion pad for even load distribution and greater comfort during extended operation.
- Air delivery system consisting of a rigid tube with a flexible section that improves maneuverability and reduces vibration transmission.
- The system integrates a single-cylinder two-stroke engine, flexible connecting tube, blower tube, and interchangeable nozzle.
- All connections are quick-fit bayonet-type for easy assembly and disassembly.
- Includes an integrated fuel tank, primer bulb ignition system, and easily accessible throttle and ignition controls.
- Integrated handle on the tube with built-in throttle control.
- Unit built with high wear-resistance components, including a high-durability plastic fuel tank, metal clamp joints, and corrosion-resistant parts.



Escaneá el QR y  
encuentra más  
información sobre  
nuestro producto.





## TECHNICAL SPECIFICATIONS

|                  |                              |
|------------------|------------------------------|
| Output airflow   | 1,850 m <sup>3</sup> /h      |
| Air velocity     | 115 m/s                      |
| Rated speed      | 7,500 RPM                    |
| Displacement     | 81.6 cc                      |
| Rated power      | 3.5 kW                       |
| Tank capacity    | 2.3 L                        |
| Engine type      | 2-stroke single-cylinder     |
| Recommended fuel | 90# gasoline + 2T oil (25:1) |



Scan the QR  
code to learn  
more about  
our product.

## Zonda 4T Blower

High-airflow portable backpack blower

### USES

- Professional cleaning of spaces with adjustable airflow and speed control.
- Clearing leaves, debris, and waste from large and complex grounds.
- Maintenance operations in green areas and public spaces.
- Post-fire and disaster cleanup with increased power and air volume.
- Professional applications requiring a four-stroke engine.

### DESIGN AND MATERIALS

- Professional portable unit with manual operation and a four-stroke engine, designed for demanding jobs.
- Adjustable dual-shoulder harness that distributes weight ergonomically.
- The frame is built with heavy-duty materials that withstand extended operation.
- The system includes a four-stroke engine with a diaphragm carburetor, independent lubrication system via engine oil, multiple interchangeable nozzles (speed, volume, and flat) to adapt performance to different tasks, quick-connect tubes, and ergonomic handlebars.
- Controls are optimized for precise adjustment of idle and throttle during operation, with accessible switches for emergency shutdown.
- No fuel-oil mixing required.
- Crankcase lubrication.
- Air output values vary depending on nozzle.





## TECHNICAL SPECIFICATIONS

|                                |                                     |
|--------------------------------|-------------------------------------|
| Air velocity (speed nozzle)    | 89 m/s                              |
| Volume airflow (volume nozzle) | 19 m³/min                           |
| Maximum rated speed            | 7,100 RPM                           |
| Idle speed                     | 2,800 RPM                           |
| Displacement                   | 75.6 cc                             |
| Fuel tank capacity             | 1.9 L                               |
| Engine type                    | 4-stroke single-cylinder            |
| Weight (without blower tube)   | 10.8 – 11.0 kg                      |
| Engine oil                     | SAE 10W-30 (API grade SF or higher) |
| Engine oil volume              | 180 cc                              |
| Carburetor                     | Diaphragm                           |
| Spark plug                     | AL 60C                              |
| Electrode gap                  | 0.028 – 0.031 in (0.7 – 0.8 mm)     |
| Sound pressure level           | 100 dB(A)                           |
| Sound power level              | 110 dB(A)                           |






# WILDFIRE



## ► BAGS AND BACKPACKS

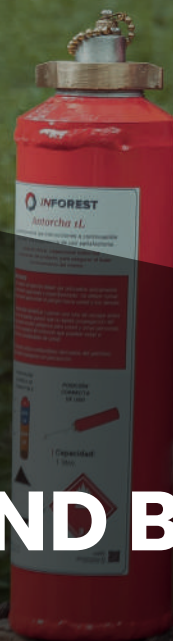

### INFOREST SRL

📱 @inforest\_incendiosforestales 📧 Inforest ☎ +54 (0) 3547-430529/406693  
✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

### INFOREST IBÉRICA

📱 @inforestiberica 📧 Inforest ☎ +34 681 314646  
✉ info@inforestiberica.com 🌐 www.inforestiberica.com





QR: Use your camera or bar code scanner and download the digital PDF version



USES

- The Inforest object holder is specially designed for transporting and protecting essential items such as small drip torches, flares, water bottles, among others.
- It can be used as an additional accessory to our backpacks, such as the Day Pack, or attached to the user's duty belt.

MATERIALS

- Manufactured using 420Dx420D polyamide, a material with high mechanical resistance and a smooth surface that facilitates the sliding of dust and dirt.
- Its internal structure is composed of foam, providing protection for the stored contents.

|        |       |          |       |
|--------|-------|----------|-------|
| WEIGHT | 140 g | DIAMETER | 10 cm |
| HEIGHT | 17 cm | VOLUME   | 1 L   |



## Backpack 14 L – Trekking



QR: Use your camera or bar code scanner and download the digital PDF version

### USES AND MATERIALS:

- Made of polyamide (Nylon) fabric with PU coating. It features an adjustable system with straps and buckles that adapts to the morphology and comfort of each user.
- The closed-cell foam pads shape the contour of the back, ensuring an ergonomic and comfortable fit.

### CAPACITY

- It has a capacity of up to 14 liters and is equipped with an adjustable side-cord system that allows you to safely carry bottles, clothing, or other items.





# Backpack 30 L – Plan

## CHARACTERISTICS:

- Backpack with a 30 L capacity, designed for transporting firefighter and brigade equipment. It includes a helmet holder, six horizontal straps, two lower load straps, two tool-holder side pockets, one handy pocket, four exterior pockets, and one main pocket.
- The 4-way adjustable harness—height, waist, chest, and shoulders—secures the load against the user's back, preventing imbalance discomfort and helping reduce fatigue.

## MATERIALS

- Made of polyamide (nylon) fabric with PU coating, which increases resistance to wear and abrasion while reducing weight.
- Flame-retardant material compliant with NFPA 701 Standard.



QR: Use your camera or bar code scanner and download the digital PDF version



## Backpack 30 L – Trekking



QR: Use your camera or bar code scanner and download the digital PDF version

### USES:

The development of the backpack is designed for rescue teams, climbing activities, or mountain work.

### FEATURES AND MATERIALS:

Back panel and shoulder straps padded with closed-cell foam, which does not absorb moisture and allows proper ventilation.

Adjustable harness system that helps distribute the load evenly, providing stability and safety for the user in difficult-access areas.

Made of waterproof-coated polyester, with heavy-duty polypropylene straps, reflective elements, and acetal buckles.

The main container includes a top-access opening with zipper and lid, and features pockets and compartments to transport personal gear, first-aid items, and climbing equipment.



## Backpack 60 L – Trekking

### USES:

Designed for wildland firefighters who need to carry essential elements for extended work periods.

### MATERIALS AND DESIGN:

Made of polyester with a water-repellent coating, featuring a padded back panel and shoulder straps with closed-cell foam that ensure user comfort by distributing and transferring weight optimally.

Mesh-fabric padding incorporated into the back panel provides proper ventilation.

Top access: gear loops, internal, external, and side pockets, front stretch mesh for storing items, quick-adjust belt, and four compression straps for load management.



QR: Use your camera or bar code scanner and download the digital PDF version





# Chest harness for communication equipment



QR: Use your camera or bar code scanner and download the digital PDF version

## USES

The Inforest communication chest rig provides a single secure container for transporting various devices of different models, such as mapping units, mobile phones, GPS devices, and portable weather stations.

## DESIGN

It features specific compartments that adjust easily, ensuring the equipment remains firmly secured.

It includes a front pocket with dual access and additional functions such as pen holders, mid-size loops for hanging objects, and a dedicated space for placing a handheld microphone.

The harness is adjustable in 4 directions and includes reflective straps on the front and back sections.

|        |                                |
|--------|--------------------------------|
| WEIGHT | 340 grams (+- 0,10 kilograms). |
| WIDTH  | 30 cm                          |
| LENGTH | 28 cm                          |



# Collapsible Hose-Carrying Backpack



QR: Use your camera or bar code scanner and download the digital PDF version

**USES:**

The Inforest hose-carrying backpack can transport up to five lengths of 1.5" hose, featuring a rigid structure and a flexible container that allows the hoses to be stored in an organized manner and kept ready for deployment.

**DESIGN AND MATERIALS:**

It is built with high-resistance, waterproof materials that ensure proper weight distribution without affecting the user's back.

The backpack's configuration allows a single person to deploy the hose from the pump to the fire, and once at the front, unroll it in an orderly manner while advancing during suppression tasks.





# Day Pack ES Forestry Backpack



QR: Use your camera or bar code scanner and download the digital PDF version

## USES

Designed to carry equipment during wildfire operations.

## DESIGN AND MATERIALS:

- Ergonomic and adjustable harness.
- Height and circumference adjustments optimize mobility and reduce user fatigue.
- Main compartment with waterproof zippers, internal and external pockets, including reflective elements.
- Exterior made of 600DX600D polyester fabric in red/yellow and 800DX800D black polyester, both with PU coating.
- Fabric certified under NFPA 701 standard. High mechanical resistance and low weight per square meter.
- Reinforced seams sewn with nylon thread.
- Padded zones at the waist, shoulders, and back, made with closed-cell polyethylene and polyester foam, covered with fabrics that promote airflow and reduce heat stress.

## POCKETS

- Dedicated pocket, separate from the main compartment, for carrying a hydration bag and preventing punctures.
- Side pockets for materials and bottle-style pockets for bottles, torches, or other items, accessible without removing the Day Pack.
- Drainage grommets to prevent liquid or dirt accumulation, and a closure system with drawcord.
- Heavy-duty polypropylene adjustment straps.

## BUCKLES

- The buckles used are made of acetal resin, offering high mechanical and thermal resistance.



|                                    |                                                                       |
|------------------------------------|-----------------------------------------------------------------------|
| DIMENSIONS WITHOUT HARNESS         | 35 cm height (+/- 5%)<br>45 cm width (+/- 5%)<br>30 cm depth (+/- 5%) |
| INTERNAL VOLUME (MAIN PACK)        | Not less than 22 L.                                                   |
| EXTERNAL VOLUME (SHELTER + POCKET) | Not less than 10 L.                                                   |
| WEIGHT                             | +2,5 kg                                                               |

Manufactured under ISO 9001:2015 standards.





## EXTRA ACCESSORIES | OPTIONAL

### 1 DETACHABLE COMPARTMENT FOR FIRE SHELTER HOLDER

On its lower section, it features a detachable compartment using a Molle system to store the Fire Shelter kit. This compartment includes a quick-access opening with a Velcro®-type closure system.

### 2 AUXILIARY POUCH

Ideal for transporting items corresponding to the first-aid kit, with easy access thanks to its position on the upper part of the Day Pack.

Includes a zipper on the top section and a front pocket with Velcro closure.

The auxiliary pouch attaches easily to the backpack through buckles.

### 3 HYDRATION BLADDER

The Waterdog Camel 2.0 bladder features a hermetic closure with excellent performance, ensuring smooth and efficient operation. Its design incorporates a drainage system that facilitates easy cleaning and fast drying.

It has a wide opening that allows comfortable access to the interior of the reservoir, simplifying both cleaning and filling with liquids or ice. -Ideal for users seeking practicality and efficiency.

**Capacity:** 2 liters

## COMPONENTS AND FEATURES





|                                             |                                                                       |
|---------------------------------------------|-----------------------------------------------------------------------|
| DIMENSIONS WITHOUT HARNESS                  | 35 cm height (+/- 5%)<br>45 cm width (+/- 5%)<br>30 cm depth (+/- 5%) |
| INTERNAL VOLUME (PACK)                      | No less than 22 L.                                                    |
| EXTERNAL VOLUME (SHELTER AND POCKET)        | No less than 10 L.                                                    |
| WEIGHT                                      | +2,5 kg                                                               |
| Manufactured under ISO 9001:2015 standards. |                                                                       |

## Day Pack CR Forestry Backpack



QR: Use your camera or bar code scanner and download the digital PDF version

### USES

Designed for carrying equipment during wildland firefighting operations.

### DESIGN AND MATERIALS

Ergonomic and adjustable harness.

Height and circumference adjustments optimize mobility and reduce user fatigue.

Main compartment with waterproof zippers, internal and external pockets for storing reflective items.

Outer fabric made of 600DX600D polyester in red/yellow and 800DX800D black polyester, both with PU coating.

Fabric certified under NFPA 70I. High-mechanical-resistance material with low weight per square meter.

Reinforced seams sewn with nylon thread.

Padded waist, shoulders, and back with closed-cell foam of polyethylene and polyester, covered with breathable fabrics that improve airflow and reduce thermal stress.

### POCKETS

Dedicated pocket, separated from the main compartment, for carrying a hydration bag and preventing punctures.

Side pockets with zippers for materials; larger side pockets with bottle-style zipper access for carrying bottles, torches, or other items, accessible without removing the Day Pack.

Drainage grommets to prevent accumulation of liquids or dirt, and a drawstring-style closure system.

Heavy polypropylene adjustment straps.

### BUCKLES

Buckles made of acetal resin, offering high mechanical and thermal resistance.





## EXTRA ACCESSORIES | OPTIONAL

### 1 DETACHABLE COMPARTMENT FOR FIRE SHELTER

The lower section includes a detachable compartment using a Molle system to store the Fire Shelter. This compartment features a quick-access opening with a Velcro®-type closure system.

### 2 AUXILIARY POUCH

Ideal for carrying the items corresponding to a first aid kit, with easy access thanks to its location on the upper section of the Day Pack.

It includes a zipper on the top and a front pocket with Velcro.

The auxiliary pouch attaches easily to the backpack using buckles.

### 3 HYDRATION BLADDER

The Waterdog Camel 2.0 bladder features a hermetic closure for excellent performance, ensuring smooth and efficient operation. Its design incorporates a drainage system that facilitates cleaning and quick drying.

It has a wide opening that allows comfortable access to the interior, simplifying both cleaning and filling with liquids or ice. Ideal for users seeking practicality and efficiency.

**Capacity:** 2 liters

## COMPONENTS AND FEATURES





## PETO Chest Harness Spain

- The Inforest communication chest harness is a practical and essential tool that provides a single, secure container for carrying various equipment from different brands and models, such as mapping devices, mobile phones, GPS units, and portable weather stations.
- It features specific compartments that adjust easily, ensuring equipment remains firmly secured.
- It includes a front pocket for a mobile phone; a rear pocket with front and side access; two Handy radio compartments; and a pen holder.
- The harness is adjustable in four directions and includes reflective straps on the front and back.
- It includes a multifunction half-moon buckle with a versatile attachment point for gloves or other accessories.

|          |                                          |
|----------|------------------------------------------|
| WEIGHT   | 390 grams (+- 0,10 kilograms).           |
| WIDTH    | 30 cm                                    |
| LENGTH   | 28 cm                                    |
| MATERIAL | Polyester with plastic coating (800x800) |



QR: Use your camera or bar code scanner and download the digital PDF version





# Rigid aluminum forestry backpack



QR: Use your camera or barcode scanner and download the digital PDF version

## USES

Load-bearing backpack designed to facilitate the transport of hoses and other heavy equipment such as portable pumps, water tanks, or other elements needed for wildland fire suppression.

## DESIGN AND MATERIALS:

Manufactured with high-resistance, waterproof materials that allow proper weight distribution without straining the back.

Rigid aluminum-alloy frame and flexible container.

The storage system allows one person to deploy the hose while advancing toward the fire, ensuring it lays down without tangles. Can carry up to five lengths of 1.5" hose.

Sizing adjustment system to fit different user heights.

## OPTIONAL:

Detachable canvas bag for the hose-pack backpack. It can be used to carry additional items such as clothing, helmets, etc.

Color: red.

## TECHNICAL SPECIFICATIONS

|                |                                             |
|----------------|---------------------------------------------|
| WEIGHT         | 2.2 kg (structure only) / 4.6 kg (complete) |
| HEIGHT         | 65 cm                                       |
| WIDTH          | 38 cm                                       |
| PLATFORM DEPTH | 30,8 cm                                     |





# Rigid forestry backpack with pipe



QR: Use your camera or bar code scanner and download the digital PDF version

Load-bearing backpack designed to facilitate the transport of hoses and other heavy equipment such as portable pumps, water tanks, or other essential items for wildfire suppression.

## DESIGN AND MATERIALS:

- Manufactured with high-resistance, waterproof materials that allow correct weight distribution without straining the back.
- The backpack features a rigid tube-frame structure and a flexible container.
- The storage system allows one person to deploy the hose while advancing toward the fire, ensuring it lays out smoothly and without tangles. It can transport up to five sections of 1.5" hose.
- Additionally, it includes a size-adjustment system to adapt to different user heights.

## OPTIONAL

- Canvas bag for hose pack. It can be used to carry additional items such as clothing, helmets, etc.
- Color: red.

## TECHNICAL SPECIFICATIONS:

|                |                                    |
|----------------|------------------------------------|
| WEIGHT         | 2.1 kg (frame) / 3.9 kg (complete) |
| HEIGHT         | 62 cm                              |
| WIDTH          | 35 cm                              |
| PLATFORM DEPTH | 26 cm                              |



# PERSONAL PROTECTION

## INFOREST SRL

Instagram @inforest\_incendiosforestales Facebook Inforest WhatsApp +54 (0) 3547-430529/406693  
Email ventas@inforest.com.ar comex@inforest.com.ar Website www.inforest.com.ar

## INFOREST IBÉRICA

Instagram @inforestiberica Facebook Inforest WhatsApp +34 681 314646  
Email info@inforestiberica.com Website www.inforestiberica.com





# PERSONAL PROTECTION

## ► FIRE RETARDANT CLOTHING

### INFOREST SRL

📱 @inforest\_incendiosforestales 📺 Inforest ☎ +54 (0) 3547-430529/406693

✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

### INFOREST IBÉRICA

📱 @inforestiberica 📺 Inforest ☎ +34 681 314646

✉ info@inforestiberica.com 🌐 www.inforestiberica.com



## Bullard PXS helmet



Scan the QR code  
and find more  
information about  
our product.

Helmet for structural firefighting, designed to provide comfort and ease of use in extreme conditions.

### DESIGN

- Heat-resistant thermoplastic shell with an aluminum-reinforced outer brim, secured at the back.
- Impact-absorbing liner system, featuring a urethane foam layer combined with a high thermal-resistance shell.
- Quick size-adjustment capability through a system attached to a heat-resistant nylon headband.

### VISOR

- Flip-down eye protection shield deployable from inside the helmet.
- High heat-resistant material with anti-scratch coating on both inner and outer surfaces.
- Ergonomic nose pad.
- NFPA approved.







## Chainsaw chaps

### USES:

— Cut protection for the legs, Class 1: 20 m/s.

— These chaps are designed for the protection and safety of chainsaw operators, preventing snagging on vegetation.

### DESIGN & MATERIALS

— Adjustable to different user sizes.

— Constructed with six total fabric layers, with waist and leg adjustment using straps with buckles, and lower-leg adjustment with Velcro closures.



Scan the QR code  
and find more  
information about  
our product.





## Dual X5 safety goggles



Scan the QR code  
and find more  
information about  
our product.

### USES

The Dual Goggles create a seal around the eyes that protects against direct impact and large particles.

Their dual-function design allows use as goggles or as safety glasses with a secure fit.

### DESIGN AND MATERIALS

High-density polycarbonate lens with nylon frame.

Adjustable strap and rubber bridge.

Clear lens: general use.

Includes an anti-impact bar that helps reduce shock and seal the view from the outside.

### QUALITY

The Dual X5 Safety Goggles have obtained IRAM quality certification.



## Enduro pro headlamp



Scan the QR code  
and find more  
information about  
our product.

### USES

Multi-function headlamp for emergency, safety, outdoor, sports, industrial use and more.

### DESIGN & MATERIALS

- Red or green led for night vision.
- Adjustable nylon head strap. easily removable from the light for cleaning.
- Uses 3 aaa alkaline / lithium batteries.

### MODES

Multi-function headlamp with eight adjustable lighting levels:

- Spot mode:** for focused long-distance lighting, from 25 to 200 lumens with a beam reach of up to 95 m.
- Flood mode:** for close-range area lighting with arm-length tasks. from 15 to 135 lumens; beam reaches a distance of 29 m.

### DIMENSIONS

|        |                    |
|--------|--------------------|
| LENGTH | 5.56 cm (2.19")    |
| WEIGHT | 96.39 g (3.40 oz). |



# EURO XV fireproof hood



Scan the QR code and find more information about our product.

## USES

Inherently flame-resistant protector. Provides effective protection against burns from radiant heat, flames, and incandescent particles.

## DESIGN & MATERIALS

- Made of aramid fibers, covering the head and neck with a “hooded” monastic-style design.
- INTERLOCK 180gr/m2, 50% meta-aramid – 50% FR Lenzing.
- Soft texture against the skin; does not cause irritation in the presence of sweat.

## ACCESSORIES

Can be used together with a helmet, respiratory protection, and eye protection.





## Euro XV firefighter footwear



Scan the QR code  
and find more  
information about  
our product.

### USES

Firefighting boots with thermal insulation.

### DESIGN AND MATERIALS

Biodensity rubber sole, glued and stitched, abrasion-resistant.

The sole provides thermal insulation and offers flexibility and grip, allowing the footwear to be used on different terrains for walking or climbing.

Constructed in leather, padded with high-density foam.

Thermoplastic toe cap and heel counter with thermo-formed reinforcement fabric.

Insole.

Rubber sole with stitched welt around the entire perimeter, with a triple-stitch reinforcement on the insole.



PERSONALIZATION  
WITH HEAT TRANSFER



PERSONALIZATION  
WITH EMBROIDERED FLAG



## Euro XV Wildland 2-Layer Jacket



Scan the QR code  
and find more  
information about  
our product.

Wildland 2-layer jacket made of flame-resistant fabric.

### DESIGN AND MATERIALS

No treatments that wash out.

Provides freedom of movement and moisture evaporation, releasing body heat.

All components are flame-resistant: fabrics, threads, reflective tapes, hook-and-loop fasteners and quick-release zippers. They prevent heat transfer from the outside to the inside of the garment.

### QUALITY

Our EURO XV flame-resistant jackets and pants hold CE Type Certificate No. 22/5410/00/0161 issued by the Certification Body AITEX in Spain.

The certifications obtained, which validate the quality of the products, comply with the provisions of Regulation (EU) 2016/425, as well as national standards through the harmonized norms ISO 16073-1:2019, EN ISO 15384:2020, EN ISO 13688:2013 + EN ISO 13688:2013/A1:2021, and EN 1149-5:2018.

### PERSONALIZATION

Custom heat-transfer printing on back and front; embroidered flags or patches on sleeves.

## OTHER DETAILS



— **Front closure:** concealed snap buttons.

— The collar can be raised and secured, providing additional protection to the user.



● Cuff adjustment with fabric strap and hook-and-loop fastener.

— Heat-transferred reflective tape  
— Improved visibility during day and night.






### Euro XV Jacket Size Chart

**Measurement A** is the torso circumference, placing the tape just below the armpit with arms relaxed and in a natural body position. Take the measurement while wearing a T-shirt.


**Measurement B** is taken in the same position as A; it is measured from the shoulder bone down to the wrist, passing over the elbow.

Sizes not listed in this chart and size XXXL are considered special sizes; cost and delivery time may vary.

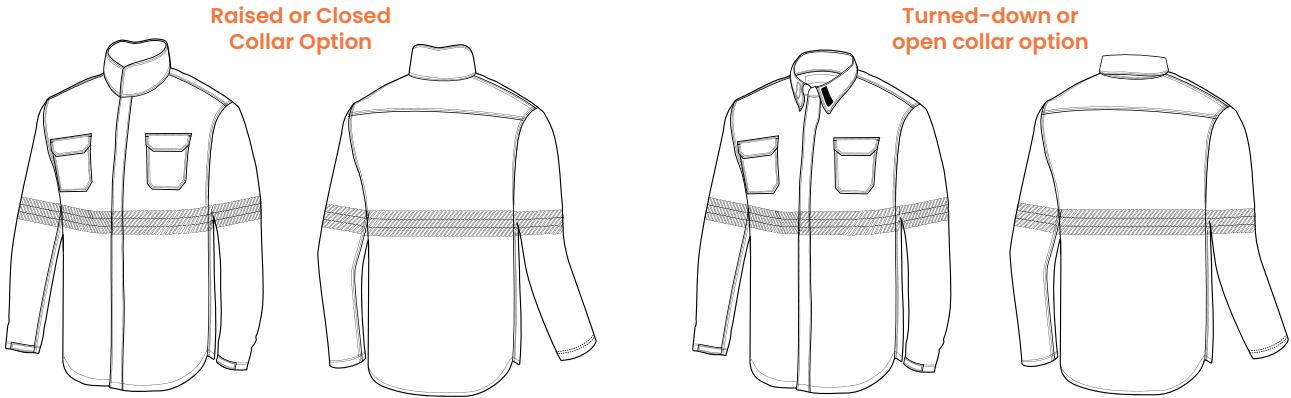

The measurements in the table refer to body measurements, not garment measurements.

|                                     | measurement / size  | XS (36)     | S (38/40)        | M (42/44)         | L (46/48)          | XL (50/52)         | XXL (54/56)        | XXXL (58/60)       |
|-------------------------------------|---------------------|-------------|------------------|-------------------|--------------------|--------------------|--------------------|--------------------|
| RECOMMENDED<br>BODY<br>MEASUREMENTS | A-Chest             | Up to 84 cm | Between 85/92 cm | Between 93/100 cm | Between 101/108 cm | Between 109/116 cm | Between 117/124 cm | Between 125/132 cm |
|                                     | B-Sleeve length     | Up to 53 cm | Up to 55 cm      | Up to 57 cm       | Up to 61 cm        | Up to 65 cm        | Up to 69 cm        | Up to 71 cm        |
| JACKET<br>MEASUREMENTS              | Chest circumference | 104 cm      | 112 cm           | 120 cm            | 128 cm             | 136 cm             | 144 cm             | 152 cm             |
|                                     | Sleeve length       | 58 cm       | 60 cm            | 62 cm             | 66 cm              | 70 cm              | 74 cm              | 76 cm              |

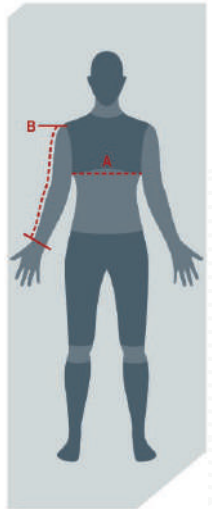

REV 03 240704



## Euro XV Wildland Bandana

### USES

Face and neck protector made from aramid flame-resistant fibers, with a tubular design specifically developed for use in wildland firefighting operations. Provides additional protection against radiant heat and filters smoke macroparticles.

### DESIGN AND MATERIALS

- INTERLOCK 180gr/m2.
- 50% Meta-Aramid - 50% FR Lenzing.

### TECHNICAL CHARACTERISTICS

- Weight:** Not greater than 180 grams.



Scan the QR code  
and find more  
information about  
our product.



## Euro XV wildland fire overall



Scan the QR code  
and find more  
information about  
our product.

### USES

- Coverall manufactured in inherently flame-resistant fabric.
- Ergonomic wide-cut design that allows unrestricted movement.

### DESIGN & MATERIALS

- Fabric allows the elimination of perspiration and body heat; combined with the selected colors, it reduces solar radiation absorption and minimizes thermal stress factors.
- Fabric without treatments that wash out, providing a soft feel against the skin.
- Anti-snag seam design that provides high durability.
- Reinforcements and seams do not interfere with the user.
- All components are flame-resistant, including fabrics, threads, reflective tape, hook-and-loop closures, and fasteners. Critical points are covered to prevent heat transfer from the exterior to the interior of the garment, avoiding contact burns.

### QUALITY

- ISO 16073–2011 Standard: “Personal protective equipment for wildland firefighting.”





## ERGONOMIC DESIGN

— This model allows the user to adopt any desired posture, as its ergonomic design adapts to different body positions.

Its elasticized waistband adapts to the user's body shape, avoiding uncomfortable pressure points during prolonged use.

Adjustable cuffs with hook-and-loop closure eliminate snagging risks.

## POCKETS

— Its design includes two reinforced cargo-style side pockets with double stitching to prevent wear.

## COLLAR AND LEG CUFFS

— The fold-down mao-style collar provides upper neck protection, while the adjustable leg cuffs fit over footwear using a hook-and-loop flap.

Upper pocket



Elasticized waistband



Leg cuffs with adjustment system over footwear



Adjustable cuffs



Side pocket

### Forestry Coverall EURO XVI Size Chart

**Measurement A** is the chest circumference, placing the tape just below the armpit with the arms down and in a natural upright posture. Take the measurement while wearing a T-shirt.

**Measurement C** is the waist circumference, measured at the height of the hip bones.

Sizes not listed in this chart are considered special sizes; their cost and delivery time may vary.

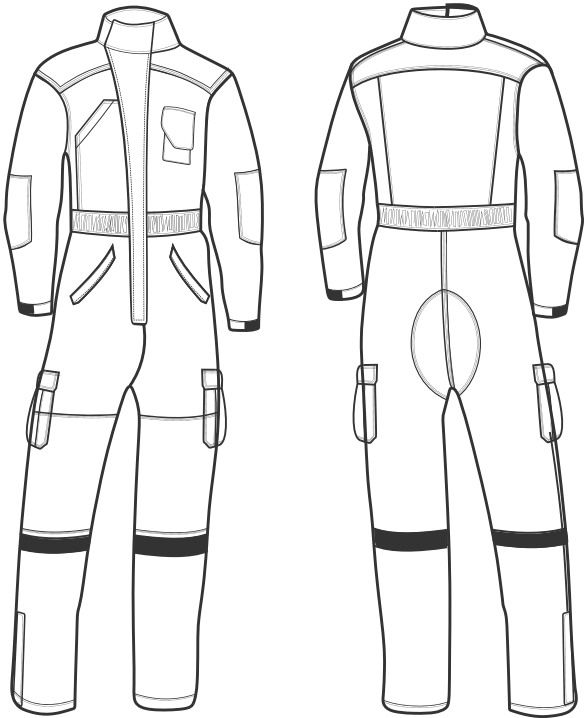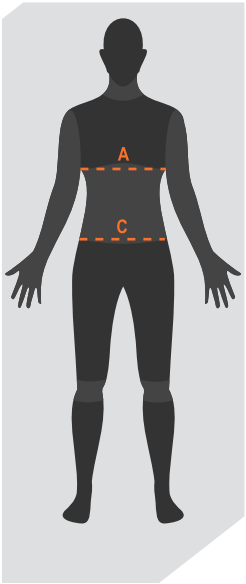

The measurements in the chart correspond to body measurements and not to the garment.

| GARMENT  | measurement/size | XS (36)     | S (38/40)        | M (42/44)         | L (46/48)          | XL (50/52)         | XXL (54/56)        |
|----------|------------------|-------------|------------------|-------------------|--------------------|--------------------|--------------------|
| COVERALL | A- Chest         | Up to 82 cm | Between 82/92 cm | Between 93/102 cm | Between 103/112 cm | Between 113/122 cm | Between 123/132 cm |
|          | C- Waist         | Up to 70 cm | Up to 70 cm      | Up to 75 cm       | Up to 80 cm        | Up to 85 cm        | Up to 85 cm        |



## Euro XV wildland fire pants



Scan the QR code  
and find more  
information about  
our product.

### USES

Forest pants manufactured with inherently flame-resistant fabric, without treatments that wash out.

### DESIGN & MATERIALS

Soft-touch fabric against the skin. Allows perspiration and body heat to dissipate, and combined with the colors used, reduces solar radiation absorption and mitigates thermal stress factors.

All components are flame resistant, including fabrics, threads, reflective tape, hook-and-loop fasteners, front button, and covered automatic brass closure, which prevents heat transfer from the outside to the inside of the garment, avoiding contact burns.

### REINFORCEMENTS

Reinforcements in areas of highest demand.

Triple-stitched seams with an anti-sag design that provide high durability.

Reinforcements and seams do not interfere with the user.

### QUALITY

Our EURO XV flame-resistant shirts and pants are certified under CE Type Certificate No. 0161/4644/16 issued by the certification body AITEX of Spain. This certifies the quality and performance of our EURO XV Flame-Resistant Forest Pants and Shirts under Standard ISO 16073:2011 "Personal protective equipment for wildland firefighting."



## POCKETS



- 1 Two cargo-style side pockets.
- 2 Two back patch pockets.
- 3 Two diagonal front pockets.
- All pockets, as well as the seams, feature an anti-snag design to prevent catching on vegetation.

## WAIST



The waistband is internally elasticized to ensure a secure and comfortable fit.

## DARTS



- Ergonomic design with darts at flex zones that provide unrestricted mobility, reducing fatigue during long shifts.
- Provide natural movement to the leg.

## REFLECTIVE TAPE



- 100% meta-aramid flame-resistant reflective tape that provides 360° visibility.
- Improved visibility during day and night operations.

## LEG CUFFS





- Designed with an adjustment system over the footwear to prevent debris from entering the boot.

Pants Size Chart EURO XV

**Measurement C** is the waist circumference, measured at hip bone level.

**Measurement D** is the inseam length, measured from the crotch to the ankle.

Sizes not listed in this chart are considered special sizes, and may vary in cost and delivery time.

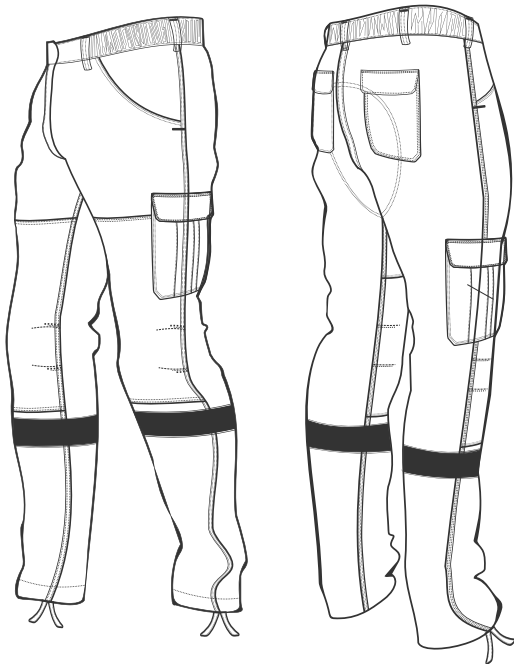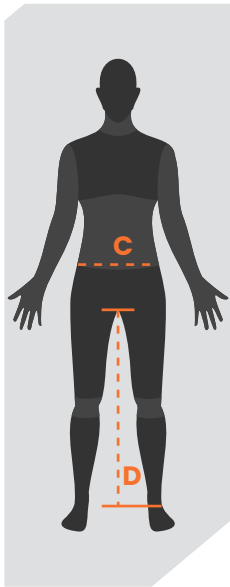

The measurements in the chart are body measurements, not garment measurements.

|                                 | Item / size         | XS (36)     | S (38/40)        | M (42/44)        | L (46/48)        | XL (50/52)        | XXL (54/56)        | XXXL (58/60)       |
|---------------------------------|---------------------|-------------|------------------|------------------|------------------|-------------------|--------------------|--------------------|
| BODY MEASUREMENTS (RECOMMENDED) | C- Waist            | Up to 70 cm | Between 71/78 cm | Between 79/86 cm | Between 87/94 cm | Between 95/102 cm | Between 103/110 cm | Between 111/118 cm |
|                                 | D- Inseam length    | Up to 72 cm | Up to 74 cm      | Up to 76 cm      | Up to 78 cm      | Up to 80 cm       | Up to 82 cm        | Up to 82 cm        |
| PANTS SIZE                      | Waist circumference | 76 cm       | 84 cm            | 92 cm            | 100 cm           | 108 cm            | 116 cm             | 124 cm             |
|                                 | Inseam length       | 74 cm       | 76 cm            | 78 cm            | 80 cm            | 82 cm             | 84 cm              | 84 cm              |



## EURO XVI Forestry Glove - Closed Cuff

### USES:

- Forestry glove designed to protect the hands during firefighting operations and related tasks.
- Provides insulation against heat and low temperatures and protection from mechanical and thermal risks resulting from handling tools and materials.
- Incorporates a waterproof, windproof, and breathable membrane that helps keep the hands dry and comfortable during work.

### DESIGN AND MATERIALS:

#### Cuff

Elastic knit fabric composed of 97% aramid (Kevlar®) and 3% elastane. It provides a snug fit around the wrist, improving the seal against the entry of particles, embers, and heat. Its design ensures a firm hold during use, optimizing protection in demanding environments.

#### External Material

**Back and cuff:** Twill fabric made of 100% aramid.

**Knuckles and between fingers:** Digital cowhide leather.

**Palm:** Cowhide leather, heat-resistant, water-repellent, and with optimized tanning to minimize shrinkage.

#### Applications

- Yellow/silver reflective tape.
- Reflective label.
- D-ring and carabiner.







### Membrane

Membrane: Waterproof, windproof, and breathable membrane with an anatomical design that enhances comfort and hand mobility.

### Internal Material

**Inner layer:** Interlock fabric composed of 60% aramid (Kevlar®) / 40% fiberglass.

**Inner back layer:** High-performance lining made of 100% aramid (67% Nomex® / 33% Kevlar®).

**Inner cuff lining:** 100% flame-resistant cotton.

### STANDARDS AND CERTIFICATIONS:

**DIN EN 388:** Protection against mechanical risks.

**DIN EN 407:** Protection against thermal risks.

**Category:** II – Personal Protective Equipment (PPE).

### SIZES AND COLORS:

**Sizes:** 5 to 14

**Available colors:**



BLUE NAVY  
(Upon request)



KHAKY  
(Standar)



## EURO XVI Forestry Glove - Open Cuff



Escanea el QR y encuentra más información sobre nuestro producto.

### USES:

- Forestry glove designed to protect the hands during firefighting operations and related tasks.
- Provides insulation against heat and low temperatures and protection from mechanical and thermal risks resulting from handling tools and materials.
- Incorporates a waterproof, windproof, and breathable membrane that helps keep the hands dry and comfortable during work.

### DESIGN AND MATERIALS:

#### Cuff

Open design for quick donning and doffing. Features a 100% cotton, flame-resistant lining for thermal comfort and wrist protection. Allows for enhanced ventilation and compatibility with other PPE sleeves.

#### External Material

**Back and cuff:** Fabric made of 100% aramid.

**Knuckles and between fingers:** Digital cowhide leather.

**Palm:** Cowhide leather, heat-resistant, water-repellent, and with optimized tanning to minimize shrinkage.

#### Applications

- Yellow/silver reflective tape.
- Reflective label.
- D-ring and carabiner.



#### Membrane

Waterproof, windproof, breathable membrane with anatomical design.

#### Internal Material

**Inner layer (palm):** Interlock fabric composed of 60% aramid (Kevlar®) / 40% fiberglass.

**Inner back layer:** High-performance lining made of 100% aramid.

**Inner cuff lining:** 100% flame-resistant cotton.

#### STANDARDS AND CERTIFICATIONS:

**DIN EN 388:** Protection against mechanical risks.

**DIN EN 407:** Protection against thermal risks.

**Category:** II – Personal Protective Equipment (PPE).

#### SIZES AND COLORS:

**Sizes:** 5 to 14

**Available Colors:**



BLUE NAVY  
(Upon request)



KHAKY  
(Standard)





# Euro XVI Wildland 4-Layer Jacket

Wildland jacket, made of flame-resistant fabric.



Scan the QR code and find more information about our product.

## DESIGN & MATERIALS

- No treatments that wash out.
- Provides freedom of movement and rapid evaporation of perspiration, releasing body heat.
- All components are flame-resistant: fabrics, threads, reflective tapes, hook-and-loop fasteners, and quick-release closures. They prevent heat transfer from the exterior to the interior of the garment.

## QUALITY

- Our EURO XV flame-resistant jackets and pants have CE Type Certification No. 22/5410/00/0161 issued by the Certification Body AITEX of Spain.
- The certifications obtained, which guarantee product quality, comply with the provisions of Regulation (EU) 2016/425. In addition, they meet national standards through harmonized standards ISO 16073-1:2019, EN ISO 15384:2020, EN ISO 13688:2013 + EN ISO 13688:2013/A1:2021, and EN 1149-5:2018.

## CUSTOMIZATION

- Heat-transfer customization on the back and front; flags or embroidered patches on the sleeves.

## OTHER DETAILS



- The collar can be raised and secured, providing additional protection to the user.



- Attachment straps for gear on the chest.

- Heat-transfer reflective tape.



- Waist straps for hanging gloves.

## POCKETS

Napoleon-style pockets.



- Front closure with hidden snap buttons.



- The cuff extends over the hand, offering greater protection with hook-and-loop adjustment.




- The back extends into a "penguin tail" shape, providing additional body protection during various movements on the job.

Size chart for EURO XVI Forestry Jacket

**Measurement A** is the chest circumference, placing the tape just below the armpit with the arms relaxed at the sides and standing in a natural posture. Take the measurement while wearing a T-shirt.


**Measurement B** is taken in the same position as A, measuring from the shoulder bone down to the wrist, passing over the elbow.

Sizes not listed in this chart and size XXXL are considered special sizes; pricing and delivery time may vary.

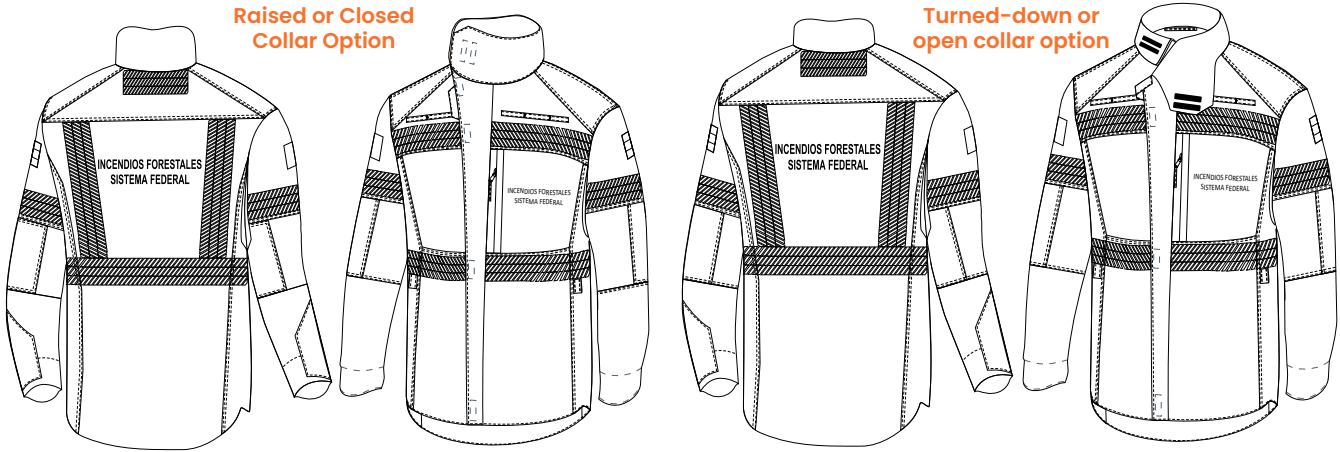

The measurements shown in the chart are body measurements, not garment measurements.

|                                     | Size                   | XS (36)        | S (38/40)           | M (42/44)            | L (46/48)             | XL (50/52)            | XXL (54/56)           | XXXL (58/60)          |
|-------------------------------------|------------------------|----------------|---------------------|----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| RECOMMENDED<br>BODY<br>MEASUREMENTS | A- Chest               | Up to<br>84 cm | Between<br>85/92 cm | Between<br>93/100 cm | Between<br>101/108 cm | Between<br>109/116 cm | Between<br>117/124 cm | Between<br>125/132 cm |
|                                     | B- Sleeve<br>Length    | Up to<br>53 cm | Up to<br>55 cm      | Up to<br>57 cm       | Up to<br>61 cm        | Up to<br>65 cm        | Up to<br>69 cm        | Up to<br>71 cm        |
| JACKET<br>MEASUREMENTS              | Chest<br>circumference | 104 cm         | 112 cm              | 120 cm               | 128 cm                | 136 cm                | 144 cm                | 152 cm                |
|                                     | Sleeve length          | 58 cm          | 60 cm               | 62 cm                | 66 cm                 | 70 cm                 | 74 cm                 | 76 cm                 |

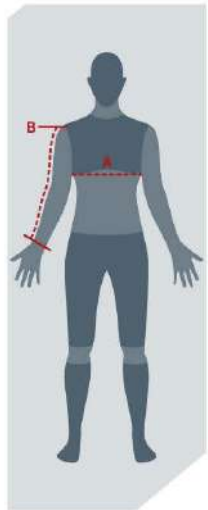

REV 03 240704





**EURO XVI  
Wildland  
2-Layer  
Jacket**

**EURO XVI  
Wildland  
Fire Pant**

## EURO XVI Wildland Fire Suit

### QUALITY

Our flame-resistant EURO XVI jackets and pants have obtained CE Type Certificate No. 0161/4644/16, issued by the certification body AITEX (Spain), guaranteeing their quality and safety under the following standards:

- EN ISO 13688:2013+EN ISO 13688:2013/A1:2021 – Protective clothing.
- EN ISO 15384:2020 – Protection against forest fire fighting.
- ISO 16073-1:2019 – Protective equipment for forest fire fighting.
- EN 1149-5:2018 – Protection against electrostatic discharge.

Also available in red and blue, camel and orange color.



Scan the QR code  
and find more  
information about  
our product.

# Euro XVI Wildland 2-Layer Jacket

SKU 02PITX000074

## DESIGNS AND MATERIALS

Manufactured in inherently flame-resistant fabric.

Without treatments that wash out, it has technical features and designs that enhance user comfort, improving physical performance throughout the workday.

## FABRIC COMPOSITION

### EXTERNAL

- 93% Meta-Aramida
- 5% Para-Aramid
- 2% Anti-static (Carbon fiber)

### INTERNAL

- FR Lenzing



## EURO XVI Wildland Fire Pant

SKU 02PITX000073

### FLAME-RESISTANT MATERIAL

Forest pants made from inherently flame-retardant fabric, without treatments that wash out.

All components are flame-resistant, including the fabrics, threads, reflective tape, fasteners, front button, and covered automatic bronze zipper, which prevents heat transfer from the outside to the inside of the garment, thus avoiding contact burns.

### FABRIC COMPOSITION

#### EXTERNAL

- 93% Meta-Aramida
- 5% Para-Aramidas
- 2% Anti-static (Carbon fiber)

#### INTERNAL

- FR Lenzing

Reinforcements in high-stress areas.

Cuff with adjustment via triple Velcro.

High waist for increased protection in the lumbar area. Includes belt for waist adjustment.

Oblique pockets on the hips, cargo-style on the sides, and patch pockets on the back.

Flame-resistant, heat-transferred reflective strips, 360° visibility.





# Sales Sheet Indications

## 1 EURO XVI WILDLAND FIRE JACKET

Brand: INFOREST

**COMPOSITION:** Wildland Fire Jacket made of fire-proof and anti-tear Mini RipStop fabric.

### OUTER LAYER

- 93 % Meta Aramida
- 5 % Para Aramida
- 2 % Antistatic Fiber (carbon fiber)

### INNER LAYER

Inner layer made of Lenzing FR, flame-retardant, soft to the touch, moisture-absorbing, and promotes evapotranspiration.

**Grammage:** 220 g/m2 (+/-5 %)

The Euro XVI Wildland Fire Jacket is very comfortable and includes functional details that meet the necessary demands for forest fire combat:

- Thermal Resistance:** All components are inherently flame-retardant, from the fabric to the threads, reflective strips, hook-and-loop closures, and zippers, providing a barrier against heat and flames for the user without compromising the release of body heat.
- Lightweight:** With the fabrics we have developed, we offer freedom of movement, comfort, and low weight while maintaining the highest standards of protection. This makes it ideal for working in warm climates or in cold weather when paired with base layer garments.
- Breathability:** Sweat and body heat escapes at a faster rate, avoiding thermal stress.

### Jacket design and Highlights:

#### FRONT:

- Emergency quick release zipper.
- Two Napoleon-style pockets with fire-resistant zippers for easy access.
- Fire-resistant hook-and-loop closures.
- Glove anchors at the waist.

#### BACK:

- Longer back (penguin tail type) to add protection while doing different types of movements, especially when working in a crouched position.

#### REFLECTIVE TAPE:

- Certified reflective tape for firefighting suits.
- Heat-transferred segmented design.
- 75mm wide in a color combination of Lemon Yellow – Silver – Lemon Yellow.
- Reflectivity under EN ISO 20471.

#### NECK AND SLEEVES:

- Neck protector that can be raised and fastened during work.
- Longer upper sleeve to enhance hand protection and improve the interface with gloves.
- Adjustable cuffs with flame-resistant hook and loop closures
- 360° vision with tapes placed in:
  - Sleeves:** Around all sleeve perimeter.
  - Torso:** Around all body perimeter. Additionally, diagonal reflective strips: two (2) below the neckline on the back and two (2) on the front above the Napoleon-style pockets.

#### CUSTOMIZATION:

- Embroidered logos or flags on the arms.
- Thermo-transferred text on the back.

### REGULATION AND NORMS:

**EN ISO 15384:2020** against partial protection against forest fire fighting and associated activities (Certificate issued by official laboratory AITEX – Spain).

**EN ISO 13688:2013 y EN ISO 13688:2013/A1:2021** Protective clothing – General Requirements.

**ISO 16073-1:2019** Wildland firefighting personal protective equipment – Requirements and test methods

**EN 1149-5:2018** against the risk of accumulation of electrostatic loads.

The fabric manufacturing plant and the cutting-stitching has **ISO 9001:2015** quality assurance certificate. The construction of the item is included in the activities for which it has been issued.

# Sales Sheet Indications

## 1 EURO XVI WILDLAND FIRE PANTS

Brand: INFOREST

**COMPOSITION:** Wildland Fire Pants made of fire-proof and anti-tear Mini RipStop fabric.

### OUTER LAYER

- 93 % Meta Aramida
- 5 % Para Aramida
- 2 % Antistatic Fiber (carbon fiber)

### INNER LAYER

Inner layer made of Lenzing FR, flame-retardant, soft to the touch, moisture-absorbing, and promotes evapotranspiration.

**Grammage:** 220 g/m<sup>2</sup> (+/-5 %)

The Euro XVI Wildland Fire Pants are very comfortable and feature functional details that meet the necessary demands for forest fire combat:

- Mechanical and Thermal Resistance:** All components are inherently flame-retardant, from the fabric to the threads, reflective elements, hook-and-loop closures, and buckles and buttons. The front button and the automatic bronze zipper (flame-retardant) are covered to prevent heat transfer from the outside to the inside, thereby preventing contact burns.
- Reinforcements:** The pants have reinforcements in high-friction areas, such as the knees and rear. They feature reinforced seams and an anti-snap design on the sides to avoid tears from vegetation while working. These reinforcements and seams are carefully designed to not interfere with the user and to prevent discomfort during prolonged use.
- Lightweight:** The pants are designed to provide freedom of movement and comfort for outdoor firefighting.
- Breathable:** Sweat and body heat escape at a faster rate, which helps prevent thermal stress.

## Pants design and Highlights:

### DESIGN:

- Ergonomic design with pleats in bending sections providing full mobility and reducing stress during long work days.
- Gusset in the crotch for greater comfort, even when lifting legs.

### POCKETS:

- Two (2) diagonal front pockets with flaps to prevent waste from getting inside.
- Two (2) side cargo pockets with pleats and flaps.
- Two (2) rear patch pockets with flaps.
- All pockets and seams are designed to prevent getting hooked in vegetation.

### LOW HEMS:

- System with flaps and hook-and-loop closures at the bottom that allows the pants to be worn tight or loose, with the flap positioned backward to prevent snagging.

### WAISTBAND:

- Higher waist on the back to provide greater protection in lumbar area.
- Seven (7) wide belt loops, so NATO-style belts can be used.
- Waist with quick-adjust flame-resistant straps and acetal buckles to accommodate different body types and allow for adjustment without the need for belts.

### CLOSURE:

- Bronze Zipper with automatic locking slider.
- Zipper and button covered with fire-retardant fabric.

## REGULATION AND NORMS:

**EN ISO 15384:2020** against partial protection against forest fire fighting and associated activities (Certificate issued by official laboratory AITEX – Spain).

**EN ISO 13688:2013** y **EN ISO 13688:2013/A1:2021** Protective clothing – General Requirements.

**ISO 16073-1:2019** Wildland firefighting personal protective equipment – Requirements and test methods

**EN 1149-5:2018** against the risk of accumulation of electrostatic loads.

The fabric manufacturing plant and the cutting-stitching has **ISO 9001:2015** quality assurance certificate. The construction of the item is included in the activities for which it has been issued.



Type B:



Type C:



## Euro XVI firefighter footwear



Scan the QR code and find more information about our product.

### USES

- Firefighter boots with thermal insulation: resistant to extreme heat and cold.
- High quality and waterproof.

### DESIGN AND MATERIALS

- They feature reinforced sides: malleolus protection through double reinforcement with lateral puncture-resistant fabric.
- Upper collar made of padded leather for added comfort.
- Removable, anatomical insole.
- Closure system: flame-resistant laces and central quick-release zipper with 8 mm chain.
- Ankle protection: black circular wrap formed by three overlapping layers of dark gray MTP (molto pren) covered with black fabric.
- 2 mm thick leather.
- Non-slip rubber sole with tread designed for uneven terrain.
- Available sizes: EU 35 to 49.
- Interior lined with hypoallergenic, breathable, and waterproof fabric.

### MODELS:

- Low shaft (Type B): height 19 cm. Weight: 1.8 kg. Available in sizes 36 to 48.
- High shaft (Type C): height 27 cm. Weight: 2 kg. Available in sizes 35 to 49.




SIZE CHART: FIREFIGHTING BOOTS (VERSION WITH TOE)

| EU | US Man | US Woman | UK   | Shape length (mm) | Foot length (mm) |
|----|--------|----------|------|-------------------|------------------|
| 35 | 3.5    | 5.5      | 2.5  | 229.38            | 214-220          |
| 36 | 4.5    | 6.5      | 3.5  | 236.04            | 221-227          |
| 37 | 5      | 7        | 4    | 242.7             | 228-234          |
| 38 | 6      | 8        | 5    | 249.36            | 235-241          |
| 39 | 6.5    | 8.5      | 5.5  | 256.02            | 242-248          |
| 40 | 7.5    | 9.5      | 6.5  | 262.68            | 249-255          |
| 41 | 8      | 10       | 7    | 269.34            | 256-262          |
| 42 | 9      | 11       | 8    | 276               | 263-268          |
| 43 | 10     | 12       | 9    | 282.66            | 269-275          |
| 44 | 10.5   | 12.5     | 9.5  | 289.32            | 276-282          |
| 45 | 11.5   | 13.5     | 10.5 | 295.98            | 283-288          |
| 46 | 12     | 14       | 11   | 302.64            | 289-296          |
| 47 | 13     |          | 12   | 309.3             | 297-303          |
| 48 | 13.5   |          | 12.5 | 315.96            | 304-400          |
| 49 | 14     |          | 13   | 322.62            | 401-407          |

SIZE CHART: FIREFIGHTING BOOTS (VERSION WITHOUT TOE)

| EU | US Man | US Woman | UK   | Shape length (mm) | Foot length (mm) |
|----|--------|----------|------|-------------------|------------------|
| 35 | 3.5    | 5.5      | 2.5  | 233.38            | 218-224          |
| 36 | 4.5    | 6.5      | 3.5  | 240.04            | 225-231          |
| 37 | 5      | 7        | 4    | 246.7             | 232-238          |
| 38 | 6      | 8        | 5    | 253.36            | 239-245          |
| 39 | 6.5    | 8.5      | 5.5  | 260.02            | 246-252          |
| 40 | 7.5    | 9.5      | 6.5  | 266.68            | 253-259          |
| 41 | 8      | 10       | 7    | 273.34            | 260-266          |
| 42 | 9      | 11       | 8    | 280               | 267-272          |
| 43 | 10     | 12       | 9    | 286.66            | 273-279          |
| 44 | 10.5   | 12.5     | 9.5  | 293.32            | 280-286          |
| 45 | 11.5   | 13.5     | 10.5 | 299.98            | 287-292          |
| 46 | 12     | 14       | 11   | 306.64            | 293-300          |
| 47 | 13     |          | 12   | 313.3             | 301-307          |
| 48 | 13.5   |          | 12.5 | 319.96            | 308-404          |
| 49 | 14     |          | 13   | 326.62            | 405-411          |

FOOT LENGHT

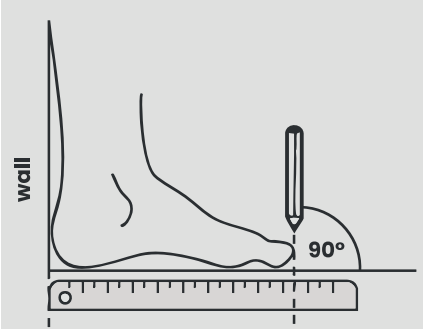

\* Reference measurement



## Everest AF goggles



Scan the QR code  
and find more  
information about  
our product.

### USES

Adjust to the face, preventing the entry of particles and harmful agents into the ocular cavity.

### DESIGN AND MATERIALS

- Hypoallergenic silicone-treated TPR design.
- Protects against high- and low-velocity impacts; suitable for ultraviolet rays and low-concentration spectra.
- Aerodynamic design.
- Allows the use of standard-sized prescription glasses.
- Interchangeable polycarbonate lens.
- Elastic band adjustment.
- Ultralight indirect ventilation made from ophthalmic-grade polycarbonate, with anti-scratch, anti-fog, anti-static treatment and 99.9% UV protection filter.
- Hypoallergenic silicone-treated TPR frame.
- High-transparency ophthalmic polycarbonate visor.
- Impact, abrasion, and splash resistant against irritating liquids.
- Goggles optically clarified and modified for neutral vision.
- Safety elastic strap.
- Goggles manufactured in ophthalmic polycarbonate.
- Frame: flexible hypoallergenic rubber.



TECHNICAL SPECIFICATIONS:

Pneumatic Structural System:

- Rubber hose protected with fire-resistant fabric
- Inflation valve
- Safety valve
- Inflation time: 10 seconds

Respirable Air Distribution System:

- Quick-connect system
- Air distributor and flow regulator
- Distribution conduit
- Individual air mask
- Mask storage bag

Fire-Resistant Exterior Viewing Panel:

- Polycarbonate with gold coating, 4-4 certification according to EN171, with thermal resistance up to 1290°C

# Fireproof Collective Shelter

Available for 4 or 6 people



Scan the QR code and find more information about our product.

USES

Integral Safety and Self-Protection Device, specially designed to help establish safety and protect people and property in situations of forest entrapment. The Fire Survival unit aims to create opportunities in extreme situations where the lives of firefighting personnel are at risk.

DESIGN & MATERIALS

Cover constructed with fire-resistant materials, easily deployed using an air cylinder and quick-connect systems that serve both for personnel breathing and for shelter inflation.

Provides protection against convective and radiant heat from high-intensity flames at short distance.

**Capacity and weight:** FS2.4: for 4 people (Weight: 12 kg); FS2.6: for 6 people (Weight: 15 kg).

Multi-layer fire-resistant fabric aluminized with fiberglass.

**1st and 2nd outer layers:** with special radiant heat protection.

**3rd and 4th inner layers:** with special thermal protection.





## Fireproof Curtain



Scan the QR code  
and find more  
information about  
our product.

### USES:

The set of aluminized fire-resistant curtains is specifically designed to provide thermal insulation inside the vehicle cab and/or heavy machinery in extreme or unexpected fire exposure scenarios, such as entrapment inside the vehicle.

### DESIGN & MATERIALS

- Fire-resistant fabric made of 4 layers with Kevlar-reinforced edging.
- 1st and 2nd outer layers: engineered for enhanced radiant heat protection.
  - 3rd and 4th inner layers: engineered for specialized thermal protection.

Available in two configurations: Single Cab and Double Cab.

### PERFORMANCE

Protection against convective and radiant heat, resisting flames with a maximum intensity of up to 600 kW, medium flame velocity up to 20 km/h, and a minimum distance of 1.5 m.

### CERTIFICATIONS

Complies with ISO Standards: 17493 : 15025 : 9151 : 6942

### PROTECTION:

A1- A2 - B2 - C4- F3

### TECHNICAL SPECIFICATIONS:

|            |            |                            |                          |                           |
|------------|------------|----------------------------|--------------------------|---------------------------|
| SINGLE CAB | 4 curtains | Front:<br>260 cm X 0,75 cm | Side:<br>110 cm X 150 cm | Rear:<br>260 cm X 0,75 cm |
| DOUBLE CAB | 6 curtains | Front:<br>260 cm X 0,75 cm | Side:<br>110 cm X 150 cm | Rear:<br>260 cm X 0,75 cm |



Scan the QR code  
and find more  
information about  
our product.

## Fireproof skirt

### USES:

The fire-resistant skirt is a protective cover built with flame-resistant materials and high-temperature resistance. It is an accessory designed to protect and minimize the risk of components reaching ignition temperature, helping prevent vehicle fire.

### DESIGN & MATERIALS

- 1st and 2nd outer layers: engineered for enhanced radiant heat protection.
- 2nd and 3rd inner layers: engineered for specialized thermal protection.

### BENEFITS:

- Protection against convective and radiant heat from high-intensity flames at short distance.
- 4-layer fire-resistant fabric.
- Seams reinforced with Kevlar thread and tape.
- Easily foldable and portable.
- Includes transport bag.

### DIMENSIONS & WEIGHT

|                                                                 |                                    |  |
|-----------------------------------------------------------------|------------------------------------|--|
| (L) 8 M × (W) 1.45 M (OTHER DIMENSIONS AVAILABLE UPON REQUEST). |                                    |  |
| TRANSPORT BAG                                                   | (L) 600 mm × (H) 50 mm × (W) 15 mm |  |
| UNIT WEIGHT                                                     | 7,5 kg.                            |  |





## Forest pants belt



Scan the QR code  
and find more  
information about  
our product.

### USES

Belt designed for use with work pants; features quick-release closure and rapid adjustment. This belt is intended for pants with NATO-style belt loops.

### DESIGN & MATERIALS

- Made of 50 mm heavy-duty polypropylene webbing, with length adjustable according to size.
- Equipped with an acetal buckle that ensures the quality and safety of the quick-release system.
- Contains no metallic components to prevent thermal and electrical transfer to the user, reducing the risk of burns from contact or exposure to radiant heat.





# FS6 Individual fireproof shelter



Scan the QR code and find more information about our product.

### USES:

- Comprehensive safety and self-protection device designed to protect people and assets in forest entrapment situations.
- Application for potential extreme-danger scenarios

### DESIGN & MATERIALS

- Fire-resistant aluminized 3-layer fabric:
  - 1st and 2nd outer layers: engineered for enhanced radiant heat protection;
  - 3rd inner layer: engineered for specialized thermal protection.
- Protection from radiant and convective heat inside the shelter, against flames with a maximum output of up to 600 kW, flame front speed up to 20 km/h, and at a minimum distance of 1.5 m from the shelter's front.
- Protection from radiant and convective heat inside the shelter, against flames up to 10.5 m wide with a maximum output of up to 80 MW, without forced ventilation, and at a minimum distance of 2 m from the shelter's front.

### CERTIFICATIONS:

Complies with UNE EN ISO 11612 and EN 469/A1, according to: EN ISO 15025 / ISO 9151 / EN ISO 6942 / ISO 12127-1 / ISO 17493 / EN ISO 13934-1 / EN ISO 13937-2 / EN ISO 13935-2.

### PROTECTION:

A1-A2-B1-B2-C4-F3

### DIMENSIONS:

|               |                |
|---------------|----------------|
| EXTENDED      | 170 x 55 x50.  |
| VACUUM-PACKED | 30 x 17 x 6,5. |
| WEIGHT        | 1,5 kg.        |



## PRO Wildland fire gloves



Scan the QR code  
and find more  
information about  
our product.

### USES:

- Leather glove designed for wildland firefighting. Flexible to ensure dexterity when using tools.
- Does not reduce handling capability of equipment

### DESIGN & MATERIALS

- Reinforced palm.
- Made of cowhide leather, featuring an aramid elastic cuff that prevents debris from entering. Its interior includes an aramid lining.
- Available in sizes S to XL.



# Tactical belt with metal anchor



Scan the QR code and find more information about our product.

## USES

Tactical belt with magnetic buckle, also known as a belt with a magnetized buckle; this type of accessory is designed for tactical, military, or law-enforcement use.

## DESIGN & MATERIALS

- Buckle equipped with magnets that allow quick closure and rapid release.
- Made of nylon or polyester, modular design with attachment points for tools, magazines, and other accessories.
- Ergonomic design with adjustable fit.
- Width: 1.5" to 2"





# Technical Rescue Suit



Scan the QR code and find more information about our product.

## USES

- Protective garment designed for technical rescue operations conducted by firefighters and emergency response teams in environments without active fire.
- Provides limited protection against accidental heat, sparks, and short-duration exposure to flames, as well as mechanical protection, thermal comfort, and high visibility.

### Rescue Shirt



### Rescue Pants



# Rescue Shirt

## Design and Ergonomics:

— Anatomically optimized design to follow the rescuer's natural movements and maximize operational mobility.

— Underarm gusset: A system that prevents sleeves from shifting or the garment from riding up when raising the arms.

— Penguin tail: Rear extension to protect the lower back during strenuous movements or when crouching.

## Closure and Adjustment Systems:

### FRONT CLOSURE:

— Fire-resistant central closure with a quick-release mechanism for immediate removal in emergencies.

### INTERNAL AND EXTERNAL POCKETS:

- Internal pocket for protection against thermal or mechanical friction.
- External flap with fire-resistant safety Velcro.
- **High collar:** Adjustable design with Velcro for full throat protection or folded-back use as needed.
- **Adjustable cuffs:** Velcro adjustment with a protective extension over the back of the hand for better compatibility with gloves.

### POCKETS AND ACCESSORIES:

- Upper pockets: Two Napoleon-style pockets with a secure closure.
- Lower pockets: Two cargo pockets with a technical closure system.
- Attachment loops: Two upper front loops for lightweight accessories.

### REINFORCEMENTS AND PROTECTION:

- **Structural reinforcements:** Double layer of fabric on shoulders and elbows to increase resistance to abrasion and wear.

#### Limited thermal protection

Protection against:

- Accidental flames
- Sparks
- Incidental heat

#### Optional configuration

Possible additions:

- Flashlight holder
- Radio holder
- Special configurations based on operational requirements



# Rescue Pants

## Design and Ergonomics:

High waist: Designed to maintain protection and coverage during demanding operational movements.

Custom fit: System with adjustable buckles and 7 cm drawstrings for a better fit.

## Closure System:

- Hidden safety button
- Technical hook
- Fire-resistant zipper

## POCKETS AND OPERATIONAL CONFIGURATION:

- Hand pockets:** Two zippered pockets.
- Cargo pockets:** Two large-capacity side pockets.
- Back pockets:** Two patch pockets with reinforced seams.
- Optional accessories:** Option to add Velcro loops for attaching handles.

## PROTECTION AND REINFORCEMENTS:

- Knee reinforcement:** Ergonomic, reinforced protection with a lower opening for optional insertion of internal pads.
- Adjustable cuff:** Velcro adjustment system for a better fit over footwear.

## Materials and Construction:

- Multi-layer system: The suit incorporates technical materials designed for mechanical resistance, thermal comfort, and heat dissipation.

### OUTER LAYER

#### Composition:

- 93% Meta-aramid
- 5% Para-aramid
- 2% Antistatic

### Back

- 100% Lenzing FR fabric.

### INNER LINING

- Honeycomb fabric composed of:
  - 49% Meta-aramid
  - 49% Lenzing FR Viscose
  - 2% Antistatic

### CONSTRUCTION

- Flame-retardant thread
- Reinforced seams
- Reinforcements at high-stress points

## VISIBILITY AND SAFETY

- The suit incorporates segmented heat-transfer tapes:
  - Reflective
  - Fluorescent
  - Photoluminescent

## PHOTOLUMINESCENT TECHNOLOGY

- Absorbs light and emits glow in total darkness without batteries, making it easier to locate personnel.

## REGULATIONS

### APPLICABLE STANDARDS

- Complies with: EN 16689:2017
- General requirements in accordance with: EN ISO 13688







Helmet certified under CE Category III, in accordance with the following standards:

- EN 16471:2014** – Helmets for wildland firefighting.
- EN 16473:2014** – Helmets for technical rescue.
- EN 12492:2012** – Helmets for mountaineers.
- EN 1385:2012** – Helmets used for canoeing, kayaking, and whitewater sports.

## Sicor EOM Wildland Helmet



Scan the QR code and find more information about our product.

### USES

Effective for head protection in wildland firefighting and technical rescue operations.

### DESIGN & MATERIALS

- Ergonomic and lightweight, meeting protection and functionality standards.
- High resistance to extreme temperatures, impacts, and crushing.
- The external components of the helmet, such as the chin straps, are made from fire-retardant materials.
- Three colors available: red, yellow, and white.

### TECHNICAL SPECIFICATIONS

- Four-point retention system that ensures maximum helmet stability.
- Made with adjustable flame-resistant fabric straps, featuring a rectangular loop; one adjustment buckle and one closure buckle.
- Quick size adjustment from size 52 to 62 using a rear regulation wheel.
- On the top of the helmet, parallel to the crest, there are 10 vents—5 on each side—that form the ventilation system. In addition, the sides feature openings and slots designed for attaching visors, the retention system, and other accessories.

### MAIN FEATURES

| ADJUSTABLE SIZE FROM 52 TO 62       |               |
|-------------------------------------|---------------|
| WEIGHT                              | 750 gr.       |
| OUTER MATERIAL                      | Thermoplastic |
| 2-year warranty / 8-year durability |               |



### SAFETY GOGGLES

Fire-resistant black material and double transparent polycarbonate lenses.

#### 3 models available:

- Double-lens goggles with silicone cord.
- Double-lens goggles with FTR elastic band.
- Double-lens goggles with quick-release closure.

- Weight:** 150gr
- Optical class 1**
- Resistant to liquids, dust, and static.



### NECK PROTECTION

Neck shrouds made of fire-resistant fabric with a quick and secure fastening system.

### AVAILABLE COLORS

#### Molded colors:

White – RAL 9016  
Yellow – RAL 1021  
Red – RAL 3020

#### Painted colors:

BWhite – RAL 9016  
Black – RAL 9005  
Yellow – RAL 1021  
Fluorescent Yellow – RAL 1026  
Red – RAL 3020  
Blue – RAL 5026  
Orange – RAL 9016  
Fluorescent Orange – RAL 2005  
Photoluminescent  
Grey – RAL (to be specified)

#### Suggestion:

It is suggested to represent each color with painted circles or squares, using the corresponding RAL codes, to clearly identify the exact shade of the hull in each variant.





## Sicor VFR EVO Urban Helmet



Scan the QR code  
and find more  
information about  
our product.

Helmet for structural firefighting.

### DESIGN

Injection-molded thermoplastic outer shell, resistant to high temperatures and mechanical stress.

Polyurethane foam liner with honeycomb reinforcement, molded and aramid-lined on the interior, providing additional protection against impacts and punctures.

4-point chinstrap that allows customized adjustment for each user, including a quick-release buckle.

One adjustable size, covering sizes 52 to 64.

Universal two-point connection system for gas masks mounted on the sides of the shell, individually adjustable.

High-temperature-resistant facial and ocular protectors that shield against extreme heat, electricity, particles, and liquid chemical substances.

### TECHNICAL SPECIFICATIONS

|                                               |                |
|-----------------------------------------------|----------------|
| HELMET WEIGHT                                 | 1.220 gr       |
| HELMET WEIGHT WITH EYE<br>AND FACE PROTECTION | 1.540 g ± 10 g |

### COLORS AVAILABLE UPON REQUEST:







## Steel Pro Zex safety goggles



Scan the QR code  
and find more  
information about  
our product.

### USES

- Protective goggles that create a seal around the eyes, guarding against direct impact or large particles.
- Provide protection against impact, UV radiation, and prevent direct contact of smoke with the eyes.

### DESIGN AND MATERIALS

- Adjustable elastic band.
- Indirect or slotted ventilation to reduce the entry of liquids, fine particles, and splashes.
- Clear lens: general use.
- Soft, non-toxic seal with anti-fog treatment.

### QUALITY

- The Steel Pro Zex Goggles have obtained IRAM quality certification.



# Structural Glove



Scan the QR code  
and find more  
information about  
our product.

## USES:

Structural glove for firefighters, providing dexterity and flexibility without sacrificing comfort.

## DESIGN & MATERIALS

Flame-resistant leather with water-repellent treatment to prevent moisture penetration and to avoid glove hardening after drying.

Thermal interior: aramid elastic cuff that prevents debris from entering the glove.



# Univet 611 Safety Goggles



Scan the QR code  
and find more  
information about  
our product.

## USES

Eye protection against liquids, coarse and fine dust particles, gases, molten metal, and hot solids.

## DESIGN & MATERIALS

- Scratch-resistant and anti-fog goggles with UV 380 filter.
- Clear polycarbonate lens.
- Double lens with thermal break technology.
- They effectively protect against heat, fogging, and impact.
- Elastic headband with silicone inserts.
- Optical class 1 for extended and continuous use.

**STANDARDS:** EN166 and EN170.





## Wildland mask



Scan the QR code  
and find more  
information about  
our product.

### USES

Designed to cover commercial masks, whether disposable face masks or nose-and-mouth half masks. Contains an air-filtering layer and provides increased heat resistance, offering a softer contact interface against the skin.

### DESIGN & MATERIALS

Adjustment around the nasal bridge area, along with elasticized zones to improve grip around the face and head.

Hook-and-loop closure and adjustment system, allowing the cover to be placed and removed without needing to take off other personal protective equipment.

Strap that allows it to be worn around the neck when not in use.





# PERSONAL PROTECTION



## ► WORKWEAR

### INFOREST SRL

📱 @inforest\_incendiosforestales 📧 Inforest ☎ +54 (0) 3547-430529/406693

✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

### INFOREST IBÉRICA

📱 @inforestiberica 📧 Inforest ☎ +34 681 314646

✉ info@inforestiberica.com 🌐 www.inforestiberica.com



# Andes Soft Pants



Scan the QR code  
and find out more  
about our product.

## USES

Cargo-style work pants with an ergonomic design for enhanced comfort.

## DESIGN AND MATERIALS

- Soft Shell fabric
- Matte Ripstop fabric with Spandex, Elastane
- Water-repellent
- 90% Polyamide, 10% Elastane

## POCKETS

- Two upper pockets
- Two side pockets with waterproof zippers
- Two rear pockets with Velcro closures

## OPTIONAL:

- Detachable system at knee height





## Chainsaw Chaps



Scan the QR code  
and find more  
information about  
our product.

### USES:

- Reduces the risk of cuts when using chainsaws, hand saws, or power tools.
- Reduces the severity and depth of injuries.
- Provides comprehensive protection for the limbs, ensuring compliance with international safety standards for chainsaw use.

### DESIGN AND MATERIALS

- Inner layer of multi-layered, overlapping cut-resistant fabric
- Outer layer of high-tenacity nylon.
- Adjustable to the contour of the leg using straps and acetal resin buckles.

### COMPOSITION

- Main body:** Highly elastic Oxford fabric with PU laminate.
- Reinforcements / contrast:** High-strength 500D Cordura Oxford.
- Inner lining:** 120 g polyester tricot.
- Additional inner lining:** 60 g polyester mesh for ventilation.
- Cut protection:** Special 6-layer UHMWPE mesh for chainsaw protection.

### STANDARDS

Developed in accordance with Regulation (EU) 2016/425 and the following standards:

- EN ISO 13688:2013 + A1:2021
- EN ISO 11393-2:2019
- EN 17353:2020 + A1:2025

**ONE SIZE FITS ALL**



# Dryas Grip Cut-Resistant Gloves



Scan the QR code  
and find more  
information about  
our product.

### USES:

- Cut-resistant gloves for chainsaw work.
- Protection against mechanical hazards.
- Operation of drilling equipment.
- General tool handling.

### COMPOSITION

- **Back:** - 92% polyester, 8% spandex (stretch fabric) with PU laminate.
- **Inner back lining:** 6-layer UHMWPE cut-resistant mesh.

**PALM:** Synthetic leather with EVA padding (anti-vibration).

### STANDARDS

Developed in accordance with Regulation (EU) 2016/425 and the following standards:

- EN 388:2016 + A1:2018
- EN ISO 11393-4:2019

### DESIGN AND MATERIALS

- High-visibility fabric with reinforced knuckles.
- Cut protection with a multi-layer system on the back of the hand.
- Palm with anti-vibration padding.
- Cuff: Elastic with Velcro adjustment on the back.

### SIZE CHART

| Size    | Length (cm) | Width (cm) |
|---------|-------------|------------|
| M (8)   | 25          | 11         |
| L (9)   | 26          | 12         |
| XL (10) | 27          | 13         |

**TOLERANCE:** ±1 CM

### MEASUREMENT GUIDE

- **Length:** from the wrist to the tip of the middle finger.
- **Width:** at the palm.



# Dryas Shell Cut-Resistant Jacket



Scan the QR code  
and find more  
information about  
our product.

### USES:

- A jacket designed for cutting and pruning tasks, ensuring safety and comfort.
- Ideal for chainsaw work, especially when working at heights or above waist level.

### DESIGN AND MATERIALS:

- Reinforcements in high-impact areas: shoulders, hem, and pockets.
- Multi-layer cut protection.

### COMPOSITION

- **Main body:** Stretch fabric (92% polyester, 8% spandex) with PU laminate.
- **Contrast panels:** Stretch fabric (92% polyester, 8% spandex) with PU coating.
- **Reinforcements (shoulders, lower body, and pockets):** High-strength 500D Cordura Oxford.
- **Cut protection:** Special 6-layer UHMWPE mesh for chainsaw protection.

### INNER LINING:

- 120 g polyester tricot.
- 60 g polyester mesh for ventilation.

### POCKETS:

- TC fabric (polyester/cotton).

### FINISHES:


- TC fabric piping/reinforcements.

### REGULATIONS

Developed in accordance with Regulation (EU) 2016/425 and the following standards:

- EN ISO 13688:2013 + A1:2021
- EN 17353:2020 + A1:2025
- EN ISO 11393-6:2019



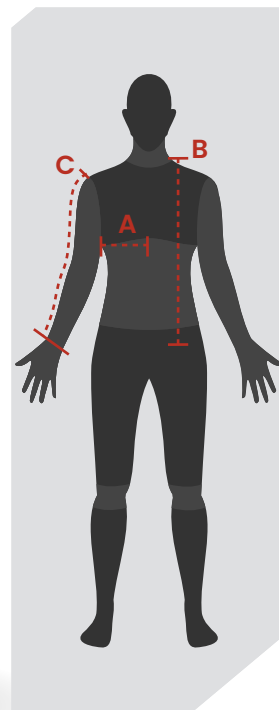

## Size Chart

| Size | 1/2 Chest (cm) | Total length (cm) | Sleeve length (cm) |
|------|----------------|-------------------|--------------------|
| XXS  | 49             | 74                | 77                 |
| XS   | 51             | 74                | 79                 |
| S    | 53             | 75                | 81                 |
| M    | 56             | 75                | 83                 |
| L    | 59             | 77                | 85                 |
| XL   | 62             | 80                | 87                 |
| 2XL  | 65             | 82                | 89                 |
| 3XL  | 68             | 82                | 91                 |
| 4XL  | 71             | 83                | 93                 |



# Euro XV 1-layer Work Jacket



Scan the QR code and find more information about our product.

## USES

- Designed to withstand long work shifts, offering mechanical protection during tasks performed outside the fire line.
- Suitable for use at base operations or during maintenance activities.

## DESIGN & MATERIALS

- Tailored design for demanding work, allowing full freedom of movement.
- Facilitates rapid evaporation of perspiration.
- 6 oz or 8 oz twill shirt.
- 100% cotton.

## CUSTOMIZATION


- Jackets can be customized with optional heat-applied transfers on the back, sleeves, and front.
- Enables color standardization and uniformity across personnel.

### Euro XV Work Jacket Size Chart

**Measurement A** is the torso circumference, placing the tape just below the armpit with arms relaxed and in a natural body position. Take the measurement while wearing a T-shirt.


**Measurement B** is taken in the same position as A; it is measured from the shoulder bone down to the wrist, passing over the elbow.

Sizes not listed in this chart and size XXXL are considered special sizes; cost and delivery time may vary.

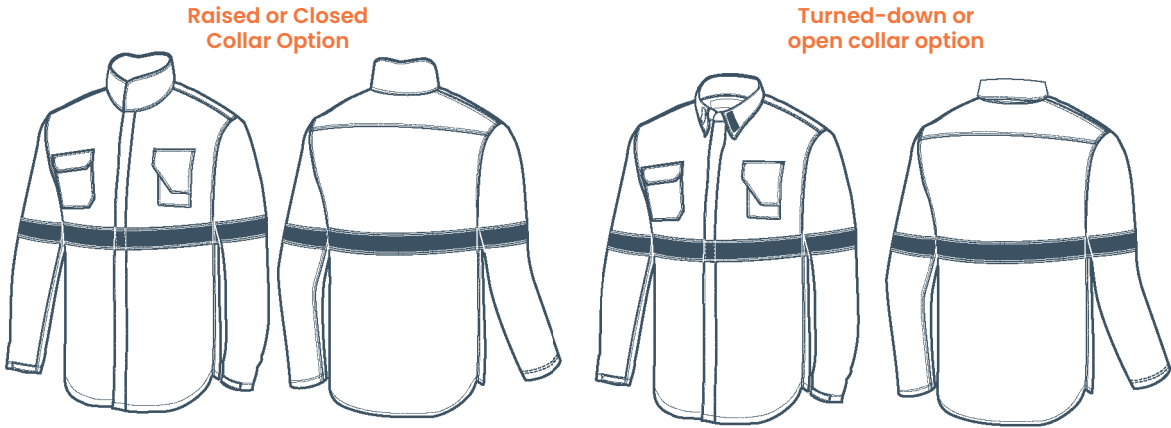

The measurements in the table refer to body measurements, not garment measurements.

| GARMENT | medida/talle     | XS (36)         | S (38/40)        | M (42/44)         | L (46/48)          | XL (50/52)          | XXL (54/56)        |
|---------|------------------|-----------------|------------------|-------------------|--------------------|---------------------|--------------------|
| JACKET  | A- Chest         | Less than 82 cm | Between 83/92 cm | Between 93/102 cm | Between 103/112 cm | Between 1113/122 cm | Between 123/132 cm |
|         | B- Sleeve Length | Up to 70 cm     | Up to 70 cm      | Up to 75 cm       | Up to 80 cm        | Up to 85 cm         | Up to 85 cm        |

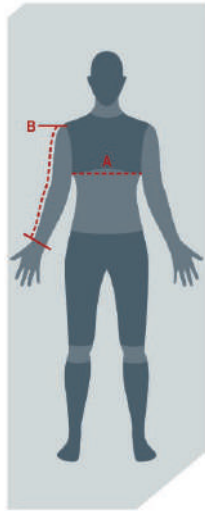





## Euro XV Work Pants



Scan the QR code  
and find more  
information about  
our product.

### USES:

Work pants with ergonomic design and reinforcements in high-demand areas.

### DESIGN & MATERIALS

- Manufactured in 8-oz gabardine, 100% cotton or ripstop, a fabric with a soft feel against the skin.
- Ergonomic design that includes darts in flex zones, providing unrestricted mobility.
- Two cargo-style side pockets.
- Two back patch pockets.
- Two diagonal front pockets with an anti-snag design that prevents catching on vegetation.
- Elasticized waistband on the inside.

### REINFORCEMENTS:


- Reinforcements in high-demand areas.
- Triple-stitched seams with an anti-snag design that provides strong resistance under heavy use.
- Reinforcements and seams designed not to interfere with the user.

Sizing Chart for Work Pants Euro XV

**Measurement C** is the circumference of the waist, measured at hip bone height.

**Measurement D** is from the crotch down to the ankle.

Sizes not listed in this chart are considered special sizes, which may vary in cost and delivery time.

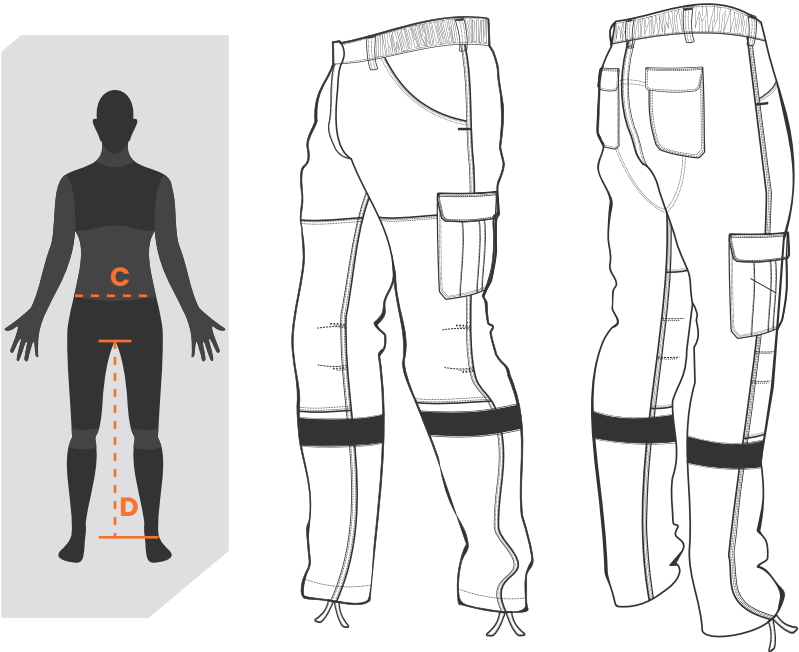

The measurements in the chart are body measurements, not garment measurements.

|                                 | Item / size         | XS (36)     | S (38/40)        | M (42/44)        | L (46/48)        | XL (50/52)        | XXL (54/56)        | XXXL (58/60)       |
|---------------------------------|---------------------|-------------|------------------|------------------|------------------|-------------------|--------------------|--------------------|
| BODY MEASUREMENTS (RECOMMENDED) | C- Waist            | Up to 70 cm | Between 71/78 cm | Between 79/86 cm | Between 87/94 cm | Between 95/102 cm | Between 103/110 cm | Between 111/118 cm |
|                                 | D- Inseam length    | Up to 72 cm | Up to 74 cm      | Up to 76 cm      | Up to 78 cm      | Up to 80 cm       | Up to 82 cm        | Up to 82 cm        |
| PANTS SIZE                      | Waist circumference | 76 cm       | 84 cm            | 92 cm            | 100 cm           | 108 cm            | 116 cm             | 124 cm             |
|                                 | Inseam length       | 74 cm       | 76 cm            | 78 cm            | 80 cm            | 82 cm             | 84 cm              | 84 cm              |



## Euro XVI 1-Layer Work Jacket



Scan the QR code  
and find more  
information about  
our product.


### USES:

- Specially designed to cover long work shifts.
- Provides mechanical protection during daily tasks outside the fire line.
- Suitable for use at bases or during maintenance operations.

### DESIGN AND MATERIALS

- Work jacket manufactured in cotton gabardine.
- Technical and design features that enhance user comfort, increasing physical performance throughout the shift.
- Designed to allow freedom of movement and rapid evaporation of perspiration, reducing thermal stress by releasing body heat.
- Collar that can be lifted and secured to protect the user.
- Attachment straps for equipment on the chest.
- Front closure protected by a storm flap.
- Reflective tape providing 360° visibility, improving daytime and nighttime recognition.
- Waist loops for hanging gloves.
- Extended cuff over the hand for greater protection, adjustable with hook-and-loop fasteners.
- Extended back forming a penguin tail to protect the body during different types of movement.



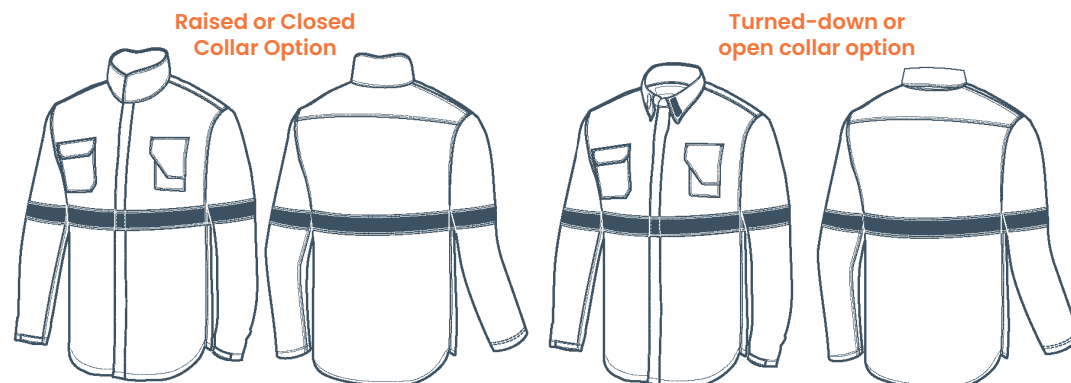

## Sizing Table for Work jacket Euro XVI


**Measurement A** is the torso circumference, placing the tape just below the armpit with arms relaxed and in a natural body position. Take the measurement while wearing a T-shirt.

**Measurement B** is taken in the same position as A; it is measured from the shoulder bone down to the wrist, passing over the elbow.

Sizes not listed in the table are considered special orders, so their cost and delivery time may vary.

The measurements in the table refer to body measurements, not garment measurements.

| measurement / size            |                     | XS (36)     | S (38/40)        | M (42/44)         | L (46/48)          | XL (50/52)         | XXL (54/56)        | XXXL (58/60)       |
|-------------------------------|---------------------|-------------|------------------|-------------------|--------------------|--------------------|--------------------|--------------------|
| RECOMMENDED BODY MEASUREMENTS | A-Chest             | Up to 84 cm | Between 85/92 cm | Between 93/100 cm | Between 101/108 cm | Between 109/116 cm | Between 117/124 cm | Between 125/132 cm |
|                               | B-Sleeve length     | Up to 53 cm | Up to 55 cm      | Up to 57 cm       | Up to 61 cm        | Up to 65 cm        | Up to 69 cm        | Up to 71 cm        |
| JACKET SIZE                   | Chest circumference | 104 cm      | 112 cm           | 120 cm            | 128 cm             | 136 cm             | 144 cm             | 152 cm             |
|                               | Sleeve length       | 58 cm       | 60 cm            | 62 cm             | 66 cm              | 70 cm              | 74 cm              | 76 cm              |

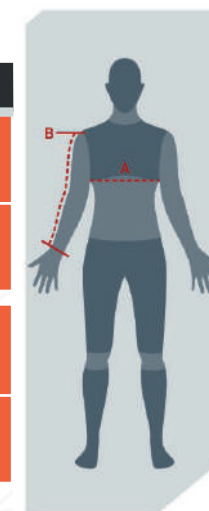



# Euro XVI 2 layers Work Jacket



Scan the QR code  
and find more  
information about  
our product.

### USES:



- Work jacket designed to cover long work shifts.
- Guarantees freedom of movement and ensures protection.

### DESIGN & MATERIALS

- Two-layers work jacket made of 100% cotton gabardine.
- Designed to allow rapid evaporation of perspiration.
- Penguin-style cut.
- Oriented to provide greater protection to the user against cold and during daily field tasks, preventing snagging on vegetation.
- Redesigned collar area that provides a secure and comfortable closure.
- Storage capacity and safety in the pockets.

### CUSTOMIZATION

- Jackets can be customized with various heat-transfer options on the back, sleeves, and chest.

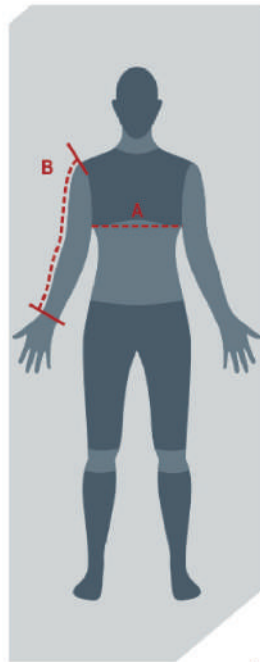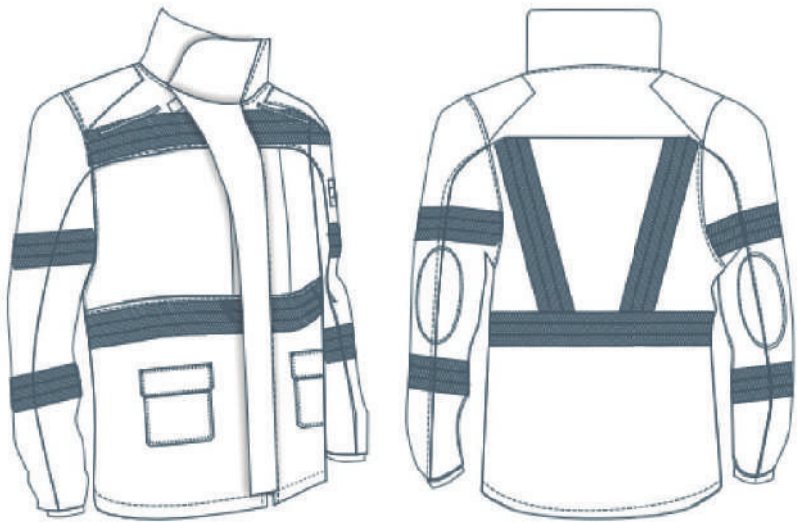

### Euro XVI work jacket Size Chart

**Measurement A** is the chest circumference, placing the tape just below the armpit with arms relaxed and in a natural body position. Take the measurement while wearing a T-shirt.

**Measurement B** is taken in the same position as A; it is measured from the shoulder bone down to the wrist, passing over the elbow.

Sizes not listed in the table are considered special sizes, so cost and delivery time may vary.

The measurements in the table correspond to body measurements and not to the garment.

| GARMENT | measurement / size | S (38/40)        | M (42/44)         | L (46/48)          | XL (50/52)         | XXL (54/56)        |
|---------|--------------------|------------------|-------------------|--------------------|--------------------|--------------------|
| JACKET  | A- Chest           | Between 83/92 cm | Between 93/102 cm | Between 103/112 cm | Between 113/122 cm | Between 123/132 cm |
|         | B- Sleeve length   | Up to 70 cm      | Up to 75 cm       | Up to 80 cm        | Up to 85 cm        | Up to 85 cm        |





# Euro XVI Work pants



Scan the QR code and find more information about our product.

## USES

Work pants with an ergonomic design, reinforced in high-stress areas to provide greater comfort.

## DESIGN & MATERIALS

- Made of 8-ounce gabardine, 100% cotton or ripstop, a fabric with a soft feel against the skin.
- Ergonomic design with darts in flexion zones that offer unrestricted mobility, reducing fatigue during long shifts.
- Gusseted crotch for increased comfort, even when lifting the legs.

## REINFORCEMENTS

- In high-demand areas such as knees and seat.
- Triple stitching with a snag-resistant design that provides exceptional durability under any strain.
- Reinforcements and seams are carefully placed to avoid discomfort during extended wear.

## POCKETS



— All pockets and seams feature snag-resistant designs to prevent catching on vegetation:

— Two side cargo pockets.

— Two back flap pockets.

— Two front diagonal pockets with flaps to prevent debris from entering.

## WAIST



— The high-rise waist offers improved protection in the lumbar area. It includes wide belt loops compatible with Nato-style belts. It also features an adjustment system for a better fit to the body.

— 7 belt loops.

— Internally elasticized waistband to ensure a secure fit.

## ERGONOMIC DESIGN



— Ergonomic design with darts in flexion zones.

— Gusseted crotch for greater comfort, even when lifting the legs.

## REFLECTIVE TAPE



— Flame-resistant reflective tape made of 100% meta-aramid, providing 360° visibility.

## HEM ADJUSTERS



— Adjustable system with velcro straps that allow the wearer to tighten or loosen the fit; the flap folds backward to avoid snagging.

— Knee darts provide natural movement of the leg.



— Reflective tape: enhanced visibility day and night.

### Sizing Chart for Euro XVI Work Pants

**Measurement C** is the circumference of the waist, measured at hip bone height.

**Measurement D** is from the crotch down to the ankle.

Sizes not listed in this chart are considered special sizes, which may vary in cost and delivery time.

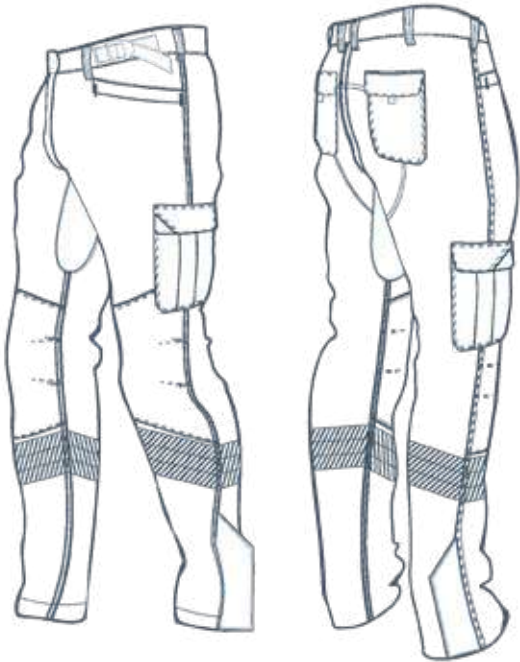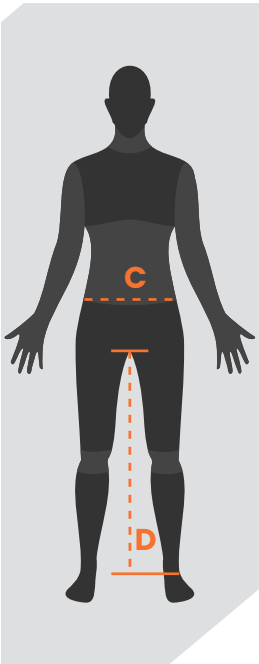

The measurements in the chart are body measurements, not garment measurements.

|                                 | Item / size         | XS (36)     | S (38/40)        | M (42/44)        | L (46/48)        | XL (50/52)        | XXL (54/56)        | XXXL (58/60)       |
|---------------------------------|---------------------|-------------|------------------|------------------|------------------|-------------------|--------------------|--------------------|
| BODY MEASUREMENTS (RECOMMENDED) | C- Waist            | Up to 70 cm | Between 71/78 cm | Between 79/86 cm | Between 87/94 cm | Between 95/102 cm | Between 103/110 cm | Between 111/118 cm |
|                                 | D- Inseam length    | Up to 72 cm | Up to 74 cm      | Up to 76 cm      | Up to 78 cm      | Up to 80 cm       | Up to 82 cm        | Up to 82 cm        |
| PANTS SIZE                      | Waist circumference | 76 cm       | 84 cm            | 92 cm            | 100 cm           | 108 cm            | 116 cm             | 124 cm             |
|                                 | Inseam length       | 74 cm       | 76 cm            | 78 cm            | 80 cm            | 82 cm             | 84 cm              | 84 cm              |





# Euro XVI Work overall



Scan the QR code  
and find more  
information about  
our product.

### USES:

Work overall that ensures unrestricted movement.

### DESIGN & MATERIALS

- Overall made of 100% cotton gabardine or wide-cut ripstop.
- Ergonomic design that adapts to the different positions of the body.
- Elasticized waistband adaptable to the user's body shape.
- Mao-style foldable collar.
- Adjustable pant cuffs that fit over footwear using closures.
- Storage capacity and secure pocket design.

### REINFORCEMENTS:



- Adjustable cuffs with Velcro that eliminate snag hazards.
- Two reinforced cargo-style side pockets with double stitching to prevent wear.

### Work overall EURO XVI Size Chart

**Measurement A** is the chest circumference, placing the tape just below the armpit with the arms down and in a natural upright posture. Take the measurement while wearing a T-shirt.

**Measurement C** is the waist circumference, measured at the height of the hip bones.

Sizes not listed in this chart are considered special sizes; their cost and delivery time may vary.

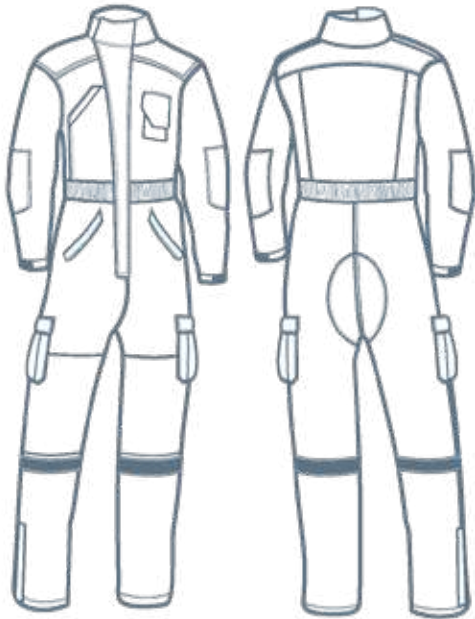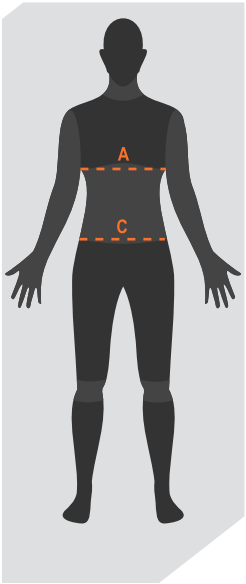

The measurements in the chart correspond to body measurements and not to the garment.

| GARMENT | measurement/size | XS (36)     | S (38/40)        | M (42/44)         | L (46/48)          | XL (50/52)         | XXL (54/56)        |
|---------|------------------|-------------|------------------|-------------------|--------------------|--------------------|--------------------|
| OVERALL | A- Chest         | Up to 82 cm | Between 82/92 cm | Between 93/102 cm | Between 103/112 cm | Between 113/122 cm | Between 123/132 cm |
|         | C- Waist         | Up to 70 cm | Up to 70 cm      | Up to 75 cm       | Up to 80 cm        | Up to 85 cm        | Up to 85 cm        |



## Extrication Gloves



Scan the QR code  
and find more  
information about  
our product.

### USES:

- Focused on vehicle rescue operations.
- Suitable for handling sheet metal with sharp edges, as well as abrasive or cutting raw materials.
- Provides protection against impacts, puncture injuries, and prevents objects from slipping from the hand.

### DESIGN & MATERIALS

- Ergonomic design that provides comfort and safety during use.
- Constructed in a single knitted, seamless piece with a lightweight and flexible texture that minimizes movement restriction.
- Excellent grip and performance against cutting by slippage.
- Jersey fabric made of HPPE technical fiber, with smooth nitrile coating (blue) and rough nitrile grip (black).
- Thermoplastic rubber zones on the back.





## Technical vest



Scan the QR code  
and find more  
information about  
our product.

### USES:


Used in field tasks carried out by inspectors, wildfire professionals, and technical personnel.

### DESIGN & MATERIALS

- Made of two fabric layers.
- Front closure covered by a protective flap.
- Waist can be adjusted with hook-and-loop fasteners.
- Front features four flap pockets and two Napoleon-style pockets on the upper section.
- Hand pocket on each side.
- Multifunction pocket on the back.
- Velcro straps on the upper area for carrying radios.
- Loops on the waist for hanging additional gear.
- Both the front and back feature a reflective tape that provides quick visibility of the user during day and night.
- Made of 100% cotton gabardine.

### CUSTOMIZATION

This garment can be customized by adding a logo or text on the upper left pocket and inscriptions on the upper back area.

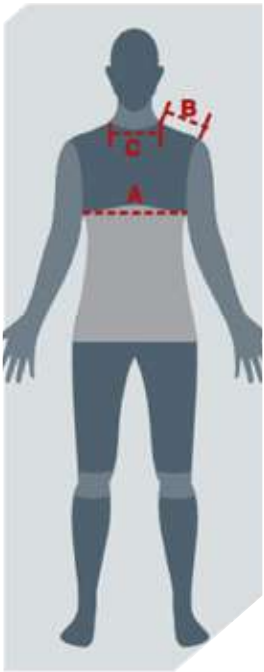

Measurements in centimeters

| Measurements/size |                        | XS    | S     | M      | L      | XL     | XXL    |
|-------------------|------------------------|-------|-------|--------|--------|--------|--------|
| TECHNICAL VEST    | A- Chest circumference | 88 cm | 96 cm | 104 cm | 112 cm | 120 cm | 128 cm |
|                   | B- Shoulder width      | 14 cm | 15 cm | 16 cm  | 17 cm  | 18 cm  | 19 cm  |
|                   | C- Neck circumference  | 36 cm | 38 cm | 40 cm  | 42 cm  | 44 cm  | 46 cm  |





# PERSONAL PROTECTION

► **FREE TIME**

## INFOREST SRL

📱 @inforest\_incendiosforestales 📺 Inforest ☎ +54 (0) 3547-430529/406693

✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

## INFOREST IBÉRICA

📱 @inforestiberica 📺 Inforest ☎ +34 681 314646

✉ info@inforestiberica.com 🌐 www.inforestiberica.com







## Helsinki Model Softshell Jacket



Scan the QR code  
and find more  
information about  
our product.

### USES:

Guarantees functionality and comfort for outdoor activities.

### DESIGN & MATERIALS

Made of softshell fabric, characterized by its three-layer construction that releases moisture and perspiration.

Water-resistant.

Napoleon-style zippered pockets located on the front.

High collar and extended back panel.

Provides the possibility of adjusting to the body with drawcords on the lower hem.



# Micro-fleece Jacket



Scan the QR code and find more information about our product.

## USES:

The antipilling microfleece jacket provides warmth and comfort for those who enjoy outdoor activities.

## DESIGN & MATERIALS

- Midweight second layer with elastic properties that enhance mobility.
- Modern classic-fit front closure.
- Two external vertical-zip pockets for safely storing small items.
- Reinforcements on shoulders, elbows, and collar.
- Underarm ventilation.



## Micro-fleece Vest



Scan the QR code  
and find more  
information about  
our product.

### USES:

- Optimal level of insulation to wear as a mid-layer garment.
- Versatile piece, suitable for outdoor activities, travel, or work environments.

### DESIGN & MATERIALS

- Two external vertical-zip pockets that allow small items to be stored securely.
- Modern classic-style front zipper.





## OSLO Model Softshell jacket



Scan the QR code  
and find more  
information about  
our product.

### USES:

Ensures functionality and comfort for outdoor activities.

### DESIGN & MATERIALS

- Made of softshell fabric, characterized by its three-layer construction that releases moisture and perspiration.
- Water-resistant.
- Napoleon-style front zip pockets.
- Extended back panel.
- Plush-lined hood interior.
- Allows the jacket to adjust to the body with drawcords at the lower hem.
- Adjustment system and high collar that ensure full head protection.
- Available in blue and coral.

# STRUCTURAL FIRE

## INFOREST SRL

📱 @inforest\_incendiosforestales 📺 Inforest ☎️ +54 (0) 3547-430529/406693  
✉️ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

## INFOREST IBÉRICA

📱 @inforestiberica 📺 Inforest ☎️ +34 681 314646  
✉️ info@inforestiberica.com 🌐 www.inforestiberica.com



# STRUCTURAL FIRE



## ► WATER EQUIPMENT

### INFOREST SRL

📱 @inforest\_incendiosforestales 📧 Inforest ☎ +54 (0) 3547-430529/406693

✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

### INFOREST IBÉRICA

📱 @inforestiberica 📧 Inforest ☎ +34 681 314646

✉ info@inforestiberica.com 🌐 www.inforestiberica.com





QR: Use your camera or bar code scanner and download the digital PDF version



Optional foam backpack

## Foam Nozzle

### USES:

Nozzle for applying low-expansion foam with an integrated proportioning system.

### DESIGN AND MATERIALS:

Aluminum construction with adjustable concentrate proportioning settings.

1.5" NPSH inlet.

Operating handle for opening and closing valve.

Stainless steel filter at the water inlet.

Through the expansion effect created at the Venturi outlet, air is introduced into the water/ concentrate mixture via the orifices located on the nozzle body, producing a low-expansion foam.

The percentage proportioning of the mixture is adjusted using a selector located on the lower part of the nozzle body, which is the foam agent entry point. The concentrate is supplied through a flexible hose that can be connected to a backpack or to the aluminum pickup tube inside the container.

Standard hose length is 100 cm and the tube length is 39 cm.

|               |          |
|---------------|----------|
| Nozzle weight | 1,900 kg |
| Hose weight   | 0,260 kg |
| Tube weight   | 0,230 kg |



QR: Use your camera or bar code scanner and download the digital PDF version



## Hose Reel

### USES:

- Device designed to roll out fire hoses laid on the ground quickly, safely, and efficiently.
- Handles hose lines up to 75 mm (3") in diameter and a maximum length of 30 m (100 ft).
- Dutch-style rolling.

### DESIGN AND MATERIALS:

- Handle magnetically attached to the rolling fork.
- Foldable support leg.
- Pneumatic or non-pneumatic wheels.

### ACCESSORIES:

- Extendable handle.
- Helper stand for hose removal.
- Support leg.
- Adjustable hose guide for hoses with couplings.

### TECHNICAL SPECIFICATIONS:

|                              | Material | Steel              |
|------------------------------|----------|--------------------|
| Dimensions (without handle): |          | 1.400 x 430 mm     |
| Dimensions (with handle):    |          | 750 x 430 x 210 mm |
| Weight:                      |          | 11.6 kg            |



## Hose Washer

### USES:

Designed to clean hose lines in a simple, efficient, and effective way.

### DESIGN AND MATERIALS:

Uses water supplied by a pump through a standard 1.5" connection, powered by a standard interchangeable 28 V battery such as Milwaukee or Génesis.

Equipped with two long-bristle brushes that apply constant pressure to the hose surface, each driven by its own motor.

The stainless steel frame allows for easy gripping from any direction and convenient storage of the washer.

Exterior housing made of compact aluminum construction, covered with double-sided diamond plates.

### ACCESSORIES:

Unit with rubber wheels and a retractable luggage-style handle.

Stainless steel tube structure for easy storage, transport, and handling.

Retractable handle.

Two rotating brushes for intensive cleaning.

Washing channel for hoses with couplings up to 25 m.

Extendable stabilizers.

Four spray nozzles for cleaning and rinsing.



QR: Use your camera or bar code scanner and download the digital PDF version





QR: Use your camera or bar code scanner and download the digital PDF version



## Inforest 360 Nozzle

### USES:

- 1" nozzle with shutoff and adjustable flow, offering up to 4 different flow settings. Delivers greater effectiveness by preserving available water and reducing hose-line damage caused by jet impact.
- Transitions from a fine fog to a solid stream with just a quarter turn of the tip.
- Designed to withstand pressures up to 40 bar, making it ideal for hose lines and reels.

### DESIGN AND MATERIALS:

- Constructed in anodized aluminum.
- Shutoff valve and rotating teeth made of stainless steel; all components are corrosion resistant.

### INLET:

- 1" (25 mm) inlet
- Selectable flows: 19–37–90–150 LPM



QR: Use your camera or bar code scanner and download the digital PDF version

## Inforest 366 Nozzle

### USES:

1.5" nozzle with shutoff and adjustable flow, offering up to 4 different flow settings. Delivers greater effectiveness by preserving available water and reducing hose-line damage caused by jet impact.

Transitions from a fine fog to a solid stream with just a quarter turn of the tip. Designed for use with hose lines during extinguishment and cooling operations.

### DESIGN AND MATERIALS:

Constructed in anodized aluminum.

Allows effective application of AFFF foam concentrate.


Shutoff valve and rotating teeth made of stainless steel; all components are corrosion resistant.

### INLET:

1.5" (38 mm) inlet

Selectable flows: 115–230–360–475 LPM



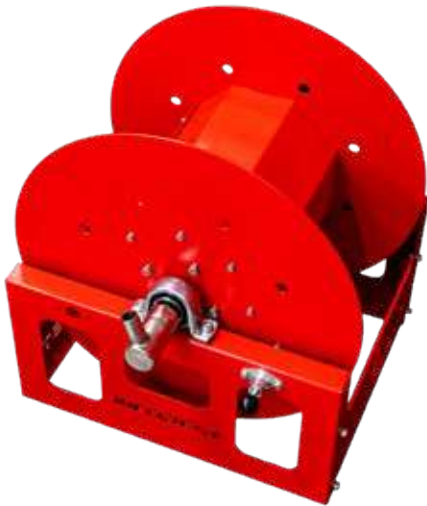

## Inforest V3 Hose Reel

### DESIGN AND FEATURES:

The practicality of the INFOREST reel is based on its simple and functional design. It incorporates efficient devices—such as the multi-position automatic locking system—that make the operator's task easier, ensuring efficient and safe handling during use.

The compact system of the INFOREST reel allows up to 50 meters of 1" hose to be wound. Thanks to the axle mounted on bearings, smooth and continuous movement is achieved, minimizing physical strain when operating the manual crank. Additionally, upon request, a pneumatic or electric motor can be integrated to further simplify hose retrieval.

### MATERIAL

- The INFOREST reel features a textured baked-on polyester finish, ensuring long-lasting durability even in adverse weather conditions, and providing resistance to wear and corrosion over time.

### TECHNICAL SPECIFICATIONS:

|        |          |
|--------|----------|
| WEIGHT | 24 Kg.   |
| WIDTH  | 65 cm.   |
| LENGTH | 54 cm.   |
| HEIGHT | 58,5 cm. |



QR: Use your camera or bar code scanner and download the digital PDF version





QR: Use your camera or bar code scanner and download the digital PDF version

## Professional firefighter's hose

### USES:

—  
Ideal hose for firefighter use, offering easy handling and low-maintenance operation.

### DESIGN AND MATERIALS:

—  
Ribbed outer jacket provides excellent abrasion resistance and long service life.

—  
High resistance to oil, chemicals, and fuel.

—  
Stable against ozone and aging.


—  
Lightweight construction. Minimal friction loss.

—  
Available sizes: 1", 1 1/2", 1-3/4", 2", 2 1/2".





QR: Use your camera or bar code scanner and download the digital PDF version



Acople Storz  
cola larga




Acople Storz  
cola corta



Adaptador Storz  
rosca Macho



Adaptador Storz  
rosca Hembra



Adaptador  
de traspaso

## Storz Adapters and Reducers

The Storz system is faster than other coupling systems due to its connection through a 120-degree twist.

### DESIGN AND MATERIALS:

Storz couplings do not use threads to connect to each other; instead, the connection is made according to the bayonet-lock principle. With this system, the lugs grip onto the corresponding contours of the matching coupling, where they latch securely.

The exterior shape is rounded, with no sharp edges, allowing easier handling. Storz coupling components are made of aluminum alloy.

### TYPES:



Storz short-tail coupling for discharge and Storz long-tail coupling for suction, used for mounting on hoses.

Storz male-thread adapter.

Storz female-thread adapter.

Transfer adapter, where both sides feature Storz unions of different sizes.

| SPECS        |                         | SIZE CHART        |  |
|--------------|-------------------------|-------------------|--|
| Denomination | <b>H</b> distance in mm | <b>L</b> diameter |  |
| 25 D         | 31                      | 25 mm / 1"        |  |
| 38           | 52                      | 38 mm / 1 ½"      |  |
| 52 C         | 66                      | 45 mm / 1 ¾"      |  |
| 52 C         | 66                      | 51 mm / 2"        |  |
| 65           | 81                      | 63,5 mm / 2 ½"    |  |
| 75 B         | 89                      | 75 mm / 3"        |  |

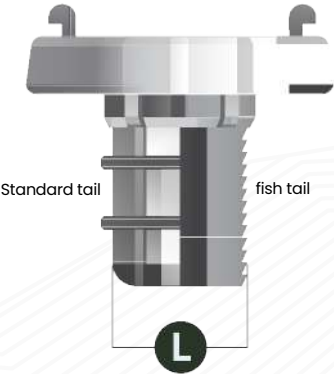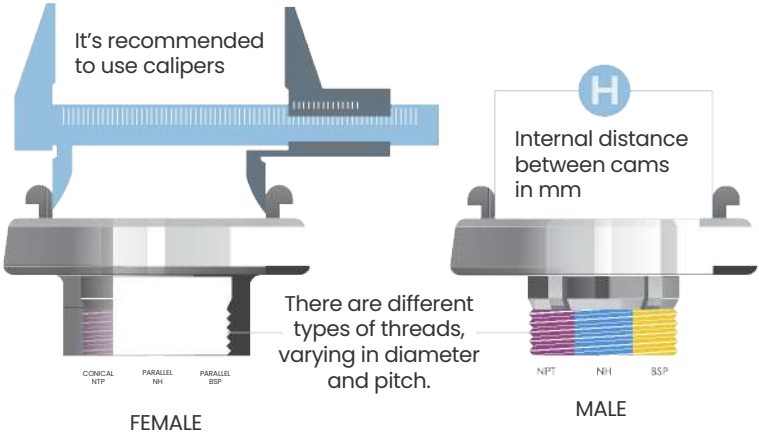





## Semirigid hose for reel

### USES:

Vulcanized rubber hose.

### DESIGN AND MATERIALS:

Low pressure-loss coefficient.

Suitable for use on hot surfaces and resistant to working pressures up to 20 BAR.

1" hose with crimped female and male end fittings.



QR: Use your camera or bar code scanner and download the digital PDF version



QR: Use your camera or bar code scanner and download the digital PDF version



# Universal Adjustment Wrench

## USES:

Tool designed to adapt to different thread dimensions of Whitworth and Storz types.

## DESIGN AND MATERIALS:

Ductile cast iron.

Epoxy protection.



QR: Use your camera or bar code scanner and download the digital PDF version



## Whitworth Adapters and Reducers

### USES:

Couplings and reducers that allow connection to different system types, such as hoses and/or piping.

### DESIGN AND MATERIALS:

Manufactured in bronze.

Sizes 1 1/2", 1 3/4", 2" and 2 1/2".

Built with a rounded exterior structure in various diameters.



# STRUCTURAL FIRE

## ► TOOL

### **INFOREST SRL**

📱 @inforest\_incendiosforestales 📺 Inforest ☎ +54 (0) 3547-430529/406693  
✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

### **INFOREST IBÉRICA**

📱 @inforestiberica 📺 Inforest ☎ +34 681 314646  
✉ info@inforestiberica.com 🌐 www.inforestiberica.com





QR: Use your camera or bar code scanner and download the digital PDF version

## 8-in-1 Rescue Tool

### USES:

Tool set designed for extrication and forcible entry.

### DESIGN AND MATERIALS:

Multi-tool system composed of an extendable force handle onto which seven different accessory heads can be attached, including tips, chisel, can opener, and Halligan-type points.

Force handle manufactured in steel with a baked-on paint finish and adjustable length.

All interchangeable heads are made of forged steel, heat-treated and chrome-plated.

The different functions are achieved by swapping the tool heads without the need for additional tools, using only the manual locking mechanism.

### TRANSPORT CASE:

The entire set is supplied in an aluminum carrying case with internal compartments for each tool head or accessory.

Dimensions: 810 mm × 350 mm × 100 mm.

### TECHNICAL SPECIFICATIONS:

| ACCESSORY               | LENGTH IN CM | WEIGHT IN KG | ACCESSORY              | LENGTH IN CM | WEIGHT IN KG | ACCESSORY | LENGTH IN CM | WEIGHT IN KG |
|-------------------------|--------------|--------------|------------------------|--------------|--------------|-----------|--------------|--------------|
| Power handle telescopic | 64.5         | 5.9          | Cutting nail for metal | 31.5         | 1.8          | Long tip  | 48.0         | 1.3          |
| Long flat chisel        | 46.0         | 1.3          | Long flat chisel       | 27.5         | 1.0          | Short tip | 28.5         | 1.0          |
| Long wide chisel        | 46.5         | 1.4          | Halligan Claw          | 31.0         | 2.0          |           |              |              |



# BearTrap multifunction light



QR: Use your camera or bar code scanner and download the digital PDF version

## USES:

Portable multifunction work light that provides both spot and flood illumination.

## DESIGN AND MATERIALS:

- Easily adaptable to any flat or uneven surface. Rubberized grip surface.
- Folding handle that allows the structure to open and also works as a hook.
- Magnetic base that provides a secure hold.
- Rechargeable lithium-ion battery. Can be used while charging.

## MODES

- **Spot mode:** concentrated illumination. From 35 to 1000 lumens, beam reaches up to 174 m.
- **Flood mode:** wide illumination. From 575 to 2000 lumens, beam reaches up to 69 m.

## DIMENSIONS

|        |                          |
|--------|--------------------------|
| LENGTH | 19.35 cm (7.62")         |
| WEIGHT | 992,23 gr (2 lb 3.00 oz) |



QR: Use your camera or bar code scanner and download the digital PDF version

## Firefighter axe with fiberglass handle

**USES:**

Features a cutting edge for impact cuts and a pointed end for penetrating and prying hard materials or objects.

**DESIGN AND MATERIALS:**

Forged steel head, heat-treated to achieve hardness (50–55 RC) on the outer cutting zone. This process maintains internal ductility, along with the ductility of the eye section where the fiberglass handle is inserted, minimizing vibration transfer when striking.

**HANDLE:**


- Fiberglass handle.
- Rubber grip.
- Dielectric insulation rated to 50,000 volts.

**TECHNICAL SPECIFICATIONS:**

|        |         |
|--------|---------|
| Weight | 4kg     |
| Length | 900 mm. |



QR: Use your camera or bar code scanner and download the digital PDF version

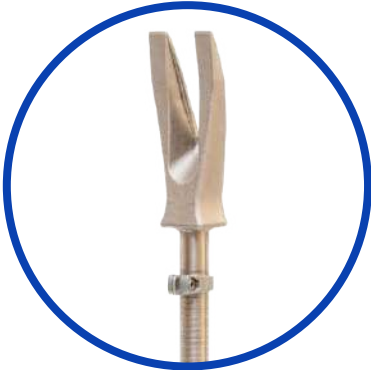

Fork



Adze and conical pick

## Forcible Entry Halligan Bar

USES:

Multipurpose bar designed for penetrating, prying, twisting, cutting, forcing, or striking. It features a fork (claw), an adze blade, and a conical spike, which are especially useful for quickly opening various types of doors or valves.

DESIGN AND MATERIALS:

The adze end or the fork end can be used to break locks or force doors. Firefighters can also use a “baseball swing” motion to drive the spike into the door frame near the lock or latch, and then pry the door open. The spike and/or fork can also be placed into the shackle of padlocks or chains to twist and break them.

All components are manufactured from heat-treated steel. The tool offers high hardness and ductility, resists impact without generating internal fractures that could weaken the piece, and has low vibration transmission. The center shaft includes a grip that prevents slipping when force must be applied, reducing the risk of injuries or bruising.

The finish consists of an electroplated anticorrosive treatment and a baked-on paint coating. A chrome-plated finish is available as an optional feature.

TECHNICAL SPECIFICATIONS:

| Length     | Weight | Material                                                         |
|------------|--------|------------------------------------------------------------------|
| Model 91cm | 5,5 kg | Chrome alloy steel (40Cr Alloy Steel) with chrome-nickel finish. |
| Model 76cm | 4,7 kg |                                                                  |





QR: Use your camera or bar code scanner and download the digital PDF version



Cutting claw



Standard claw

## Forced Entry Axe

Available in two versions:  
Forced entry axe with cutting claw  
Forced entry axe with standard claw

### USES:

Multi-purpose rescue and forcible entry tool in a personal-size format, designed for forcing doors and windows, prying and twisting latches and locks, light repairs, nail extraction, gas shutoff, cutting, and light metal work.

### DESIGN AND MATERIALS:


Manufactured as a single forged piece.  
Rubber handle.

### TECHNICAL SPECIFICATIONS:

|        |        |
|--------|--------|
| Weight | 1.5 kg |
| Length | 381 mm |



Escanea el QR y encuentra más información sobre nuestro producto.

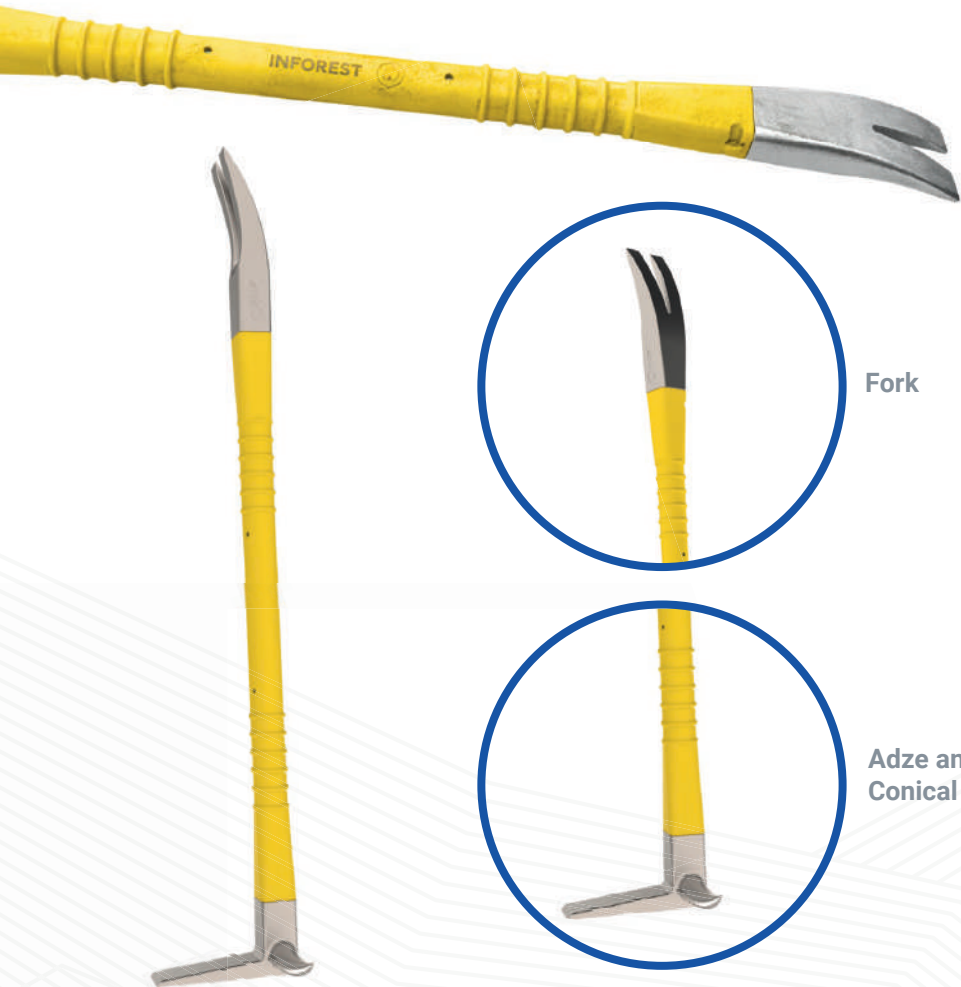

Fork

Adze and  
Conical Pick

## Halligan with Fiberglass Handle

### USES:

Multipurpose bar designed for prying, twisting, cutting, forcing, or striking. It features a claw (fork), an adze (blade) and a conical pick, making it useful for opening different types of doors or valves.

### DESIGN AND MATERIALS:

The adze end or fork end can be used to break locks or force doors. It can also be used to drive the pick into a door frame near the lock or latch and then force it open.

The pick and/or fork can be inserted into the eye of chains or padlocks and twisted until they break..


### HANDLE:

The handle, with an injected fiberglass core, minimizes vibration transfer to the user when striking. Certified for insulation and dielectric strength up to 50,000 volts.

Raised grip rings provide an ergonomic, non-slip hold.

### TECHNICAL SPECIFICATION:

| Lenght | Weight |
|--------|--------|
| 91 cm  | 4.5 kg |



# Hungarian Rake

### USES:

- Removal and displacement of loose materials or objects during operations.
- Opening of roofs and ceilings for inspection, ventilation, and access to the source of the fire.
- Post-fire inspection operations to detect hot spots or reignition.

### DESIGN AND MATERIALS

- Head made of Carbon Steel SAE 1010 – SAE 1070
- Finished with oven-cured epoxy coating, providing greater resistance to abrasion and corrosion

**Color:** Micro-textured black

### DIMENSIONS

|              |                       |
|--------------|-----------------------|
| TOTAL HEIGHT | 185 cm                |
| WIDTH        | 24 cm                 |
| DEPTH        | 13 cm                 |
| HANDLE       | 120 or 150 meter long |

### HANDLE

- Fiberglass with rubber grip. Dielectric insulation up to 50,000 volts.



Scan the QR code  
to find more  
information about  
our product.



QR: Use your camera or bar code scanner and download the digital PDF version



# Multipurpose Hatchet

**USES:**

- Personal-use tool for structural firefighting or rescue.
- Practical and easy to handle.
- Ideal for work in confined spaces.

**DESIGN AND MATERIALS:**

- Integrates three main functions: a flat-blade axe, a pointed pick, and a pry bar for forcing entry or opening hydrant caps.
- Upper slot designed to be used as a lever for opening and closing valves, forcing padlocks, and overcoming other obstacles during firefighting operations.
- Steel body hardened through heat treatment.
- Grip area with textured handle.
- Baked-on paint finish.

**TECHNICAL SPECIFICATIONS:**

| Length | Weight | Head Material |
|--------|--------|---------------|
| 370mm  | 1.4kg  | Acero 1045    |





QR: Use your camera or bar code scanner and download the digital PDF version



## Pike Pole

### USES:

The pike pole, also known as a hook, is a tool used in structural and urban firefighting to overhaul, pull, push, break, or clear areas affected by fire.

This tool allows firefighters to break openings, pull down ceilings, remove fuel, among other tasks.

### DESIGN AND MATERIALS:

Available in two sizes: **2.10 m and 3 m.**

Aluminum head with point and hook.

### HANDLE:

Fiberglass handle.

Rubber grip.

Dielectric insulation rated to 50,000 volts.

### TECHNICAL SPECIFICATIONS:

| Length | Weight  | Head material |
|--------|---------|---------------|
| 2,10 m | 1,9kg   | Hardox 450    |
| 3 m    | 2,10 kg | Hardox 450    |



QR: Use your camera or bar code scanner and download the digital PDF version

# PolyTac 90 X Flashlight

## USES:

Tactical-use flashlight that can be carried on protective equipment or a harness.

## DESIGN AND MATERIALS:

- Multi-charging flashlight: can operate with a USB-rechargeable battery or two CR123A lithium batteries.
- Reversible pocket clip that can be attached to protective gear or harnesses.
- Multiple mounting options through a D-ring.
- Switch with built-in battery life indicator.

## MODES

- High mode:** 500 lumens, beam distance up to 167 m.
- Low mode:** 85 lumens, beam distance up to 64 m.

## DIMENSIONS

|         |                                                                                       |
|---------|---------------------------------------------------------------------------------------|
| LENGTH: | 11,25 cm.                                                                             |
| WEIGHT: | 122 g with CR123A lithium batteries<br>136 g with SL-B26 batteries (USB rechargeable) |





# Portable Scene Light

## USES:

Portable, rechargeable, and collapsible scene light, ideal for rescue operations, industrial use, and general scene illumination.

## DESIGN AND MATERIALS:

- Twelve white LEDs and wide reflectors.
- Telescopic mast and rotating head. They extend to a total height of 183 cm or 213 cm in the EXT version.
- 90° rotating neck.
- Integrated stabilizing legs can be deployed in strong wind conditions (up to 64 km/h) or uneven terrain.

## MODES

- High:** 10,000 lumens; beam distance up to 616 m
- Medium:** 5,300 lumens; beam distance up to 445 m
- Low:** 2,000 lumens; beam distance up to 300 m

## DIMENSIONS

|        |                                 |
|--------|---------------------------------|
| SIZE   | 57.15 cm x 64.77 cm             |
| WEIGHT | 11.92 kg (26 libras 4.80 onzas) |



QR: Use your camera or bar code scanner and download the digital PDF version



QR: Use your camera or bar code scanner and download the digital PDF version



#### USES:

Portable stackable light for use in fire, rescue, industrial, construction, medical emergencies, among others.

#### DESIGN AND MATERIALS:

- Compact size with a 360° rotating head, stackable to create a “light tower.”
- Hook-style base for hanging on doors, railings, and fences.
- Rechargeable lithium-ion battery.
- Digital display that shows intensity level and lantern runtime.

#### MODES

Five intensity levels:

- 20%: 2300 lumens
- 40%: 4500 lumens
- 60%: 6300 lumens
- 80%: 8300 lumens
- 100%: 10000 lumens

#### DIMENSIONS

|           |                            |
|-----------|----------------------------|
| DIMENSION | 40.6cm x 27.9 cm x 30.5 cm |
| WEIGHT    | 7,06 kg (15.56 lb)         |





## Splithammer Axe with fiberglass handle



QR: Use your camera or bar code scanner and download the digital PDF version

### USES:

One of the preferred tools for cutting, prying, and striking.

### DESIGN AND MATERIALS:

The axe head is made of forged steel, heat-treated to provide hardness in the blade area (50–55 RC).

This treatment maintains ductility in the eye zone where the handle is inserted (30–35 RC), transmitting minimal vibration to the user.

Axe head with a wedge on one side and an opposite end that can be used as a striking sledge.

### HANDLE:

Fiberglass handle.

Rubber grip.

Dielectric insulation: 50,000 volts.

### TECHNICAL SPECIFICATIONS:

|          |            |
|----------|------------|
| Weight   | 3.9 kg     |
| Length   | 900 mm     |
| Material | 1045 Steel |



Scan the QR code  
and find more  
information about  
our product.



## TELESCOPIC PIKE POLE

### USES:

The telescopic pike pole is used in structural and urban fires to remove, hook, push, break, or clear areas affected by fire. It facilitates access, material removal, and cooling during emergency operations.

This tool allows breaking openings, opening ceilings, removing fuel, among others.

### DESIGN AND MATERIALS:

The tool features an aluminum head equipped with a tip and hook, designed to penetrate, dig, and efficiently remove debris. Its extendable structure adapts to various operational needs, reaching greater heights without compromising maneuverability.

### TECHNICAL SPECIFICATIONS

|                       |                                 |
|-----------------------|---------------------------------|
| Telescopic model      | Extendable from 2.4 to 4 meters |
| Dielectric insulation | Resistance up to 50,000 Watts   |

# RESCUE EQUIPMENT

## INFOREST SRL

📱 @inforest\_incendiosforestales 📺 Inforest ☎️ +54 (0) 3547-430529/406693  
✉️ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

## INFOREST IBÉRICA

📱 @inforestiberica 📺 Inforest ☎️ +34 681 314646  
✉️ info@inforestiberica.com 🌐 www.inforestiberica.com



# RESCUE EQUIPMENT

## ► BAGS AND BACKPACKS

### INFOREST SRL

📱 @inforest\_incendiosforestales 📺 Inforest ☎ +54 (0) 3547-430529/406693

✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

### INFOREST IBÉRICA

📱 @inforestiberica 📺 Inforest ☎ +34 681 314646

✉ info@inforestiberica.com 🌐 www.inforestiberica.com





## Big trauma bag



QR: Use your camera or bar code scanner and download the digital PDF version

### USES:

- Facilitates medical tasks by enabling the transport of medications, supplies, and forms.
- Combines in a single space everything necessary for operational activities.

### DESIGN & MATERIALS

- Bag made of coated polyester, with water-resistant reinforcements in high-friction and high-wear areas.
- Walls with impact protection and thermal insulation.
- Transparent pockets with flaps, featuring areas for written content identification.
- Removable insulated dividers that allow modification of compartmented zones, making it easier to access frequently used equipment.
- Lid with secure yet quick-opening closure.
- Can be manufactured in different colors and combinations to support content-coding systems.
- Yellow is commonly used for trauma bags; blue for airway management; and red for circulatory or hemorrhage-control systems.

### SPECIFICATIONS

| Length | Width  | Height |
|--------|--------|--------|
| 45 cm. | 30 cm. | 25 cm. |



OPEN BACKPACK



# Large first aid backpack



QR: Use your camera or bar code scanner and download the digital PDF version

Backpack designed to assist multiple patients or provide support for extended periods of time.

## USES:

- Storage of supplies for airway management, circulation, trauma, biosafety, oxygen cylinder, and other intended uses such as obstetrics and neonatal care.
- Can be used as a handheld bag thanks to straps designed for that purpose.
- Assistance to patients in locations with difficult access.

## DESIGN AND MATERIALS

- Large-capacity backpack with adjustable harness.
- Straps for use as a handbag.
- Protection of interior contents through impact absorption.
- Thermal insulation.
- Internal layout with compartmented pockets and spaces for storing supplies.



# Small first aid backpack



QR: Use your camera or bar code scanner and download the digital PDF version

Backpack designed for transporting essential items for patient assistance.

## USES:

- Safe transport of items for primary care in remote areas or locations with difficult access.
- Self-protection for response teams, as it can hold items for airway management, hemorrhage control, and trauma care.

## DESIGN AND MATERIALS

- Protection of interior contents through impact absorption.
- Thermal insulation.
- Internal compartments designed for quick identification of items.
- Capable of transporting necessary supplies for airway management, circulation, immobilization, biosafety, medication, and more.

CLOSED BACKPACK



OPEN BACKPACK





## Small Trauma Bag



QR: Use your camera or bar code scanner and download the digital PDF version

### USES

- Facilitates medical tasks by enabling the transport of medications, supplies, and forms.
- Combines in a single space everything necessary for field operations.

### DESIGN & MATERIALS

- Bag made of coated polyester, with water-resistant reinforcements in high-friction and high-wear areas.
- Walls with impact protection and thermal insulation.
- Transparent pockets with flaps, featuring designated areas for written content identification.
- Removable insulated dividers that allow modification of compartmented zones.
- Lid with secure yet quick-opening closure.
- Carrying straps.
- Can be manufactured in different colors and combinations to support content coding systems.

### SPECIFICATIONS

| Length | Width  | Height |
|--------|--------|--------|
| 34 cm. | 27 cm. | 22 cm. |



The text "RESCUE EQUIPMENT" in a large, bold, white, sans-serif font, preceded by a white medical symbol (a cross with a central dot). The background of the text is a dark, semi-transparent overlay on a photograph of two firefighters in blue uniforms and masks, working on a stretcher outdoors. A fire truck is visible in the background.The text "► IMMOBILIZATION AND TRANSFERS" in a large, bold, white, sans-serif font, preceded by a white right-pointing triangle. The background is the same dark, semi-transparent overlay as the previous section.

**INFOREST SRL**

📱 @inforest\_incendiosforestales 🌐 Inforest ☎ +54 (0) 3547-430529/406693  
✉ ventas@inforest.com.ar comex@inforest.com.ar 🌐 www.inforest.com.ar

**INFOREST IBÉRICA**

📱 @inforestiberica 🌐 Inforest ☎ +34 681 314646  
✉ info@inforestiberica.com 🌐 www.inforestiberica.com



Spider placed on Tabla Raquis

## Adult plastic spine board



QR: Use your camera or bar code scanner and download the digital PDF version

Indispensable product for working in accidents and transporting victims.

### USES:

Tool for immobilizing the spine and ensuring safe transport.

A patient secured on the plastic spine board with cervical collar, lateral head immobilizer, and spider harness can be placed in any position for transport on stairs or through difficult access areas.

### DESIGN AND MATERIALS

Ten perimeter handles designed to facilitate gripping positions for lifting and transporting the patient.

Slots for threading the spider straps and the lateral head immobilizer straps.

### SPECIFICATIONS

| Length | Width | Material                            | Weight | Maximum load |
|--------|-------|-------------------------------------|--------|--------------|
| 182 cm | 42 cm | HDPE<br>(high-density polyethylene) | 7,5 kg | 150 kg       |





## Basket-type rescue stretcher



QR: Use your camera or bar code scanner and download the digital PDF version

Basket-type stretcher used for transporting victims in difficult-to-access areas.

### USES:

Enables the transport of victims in hard-to-reach locations, rugged terrain, for aerial evacuation, or extrication from confined spaces in both vertical and horizontal orientations.

Used to evacuate patients or victims from buildings using rope systems, cableways, or vertical descent.

Optional: strap system with safety carabiners to facilitate vertical and horizontal hoisting, allowing for multiple anchoring points.

### DESIGN & MATERIALS

Aluminum structure with baked-on paint coating.

Corrosion resistant.

High load-bearing capacity.

Two safety belts to secure the patient to the stretcher.

Can incorporate two or four anchoring points for the hoisting harness.

Optional flotation system that prevents water force from submerging the stretcher, enabling aquatic rescues in moving water.

Compatible with various brands and models of spine boards.



Carrying bag



## Corrugated plastic splint set 4 pieces with carrying bag.



QR: Use your camera or bar code scanner and download the digital PDF version

### USES

Allows securing the limb that needs to be immobilized quickly and effectively.

### DESIGN AND MATERIALS

Corrugated plastic sheet.

Kit includes:

- Leg splint (large).
- Elbow/ankle splint (large).
- Elbow/ankle splint (small).
- Hand splint.

### ACCESSORIES

Includes carrying bag.





## Fastening Straps

### USES:

- Use in conjunction with spine boards.
- Patient immobilization for transport.

### DESIGN & MATERIALS

- Color coding to ensure correct system placement.
- Allows adjustment of the distance between anchor points, as well as fit over the patient's body.
- Manufactured in heavy-duty 50 mm polypropylene with hook-and-loop closure.
- Loop-end design for easy donning and removal.
- X-ray translucent, allowing imaging diagnostics without removing immobilization components.



QR: Use your camera or bar code scanner and download the digital PDF version





## Kendrick extrication device



QR: Use your camera or bar code scanner and download the digital PDF version

### USES:

- Extrication of patients inside vehicle compartments and confined spaces.
- The product adapts to the design of any type of seat in motor vehicle accidents.
- Provides maximum support to the spine, neck, and head during extrication.
- Stabilizes the spine and neck together with the cervical collar.
- Immobilizes fractures in the lower limbs and pelvis.
- Restricts movement of the torso, head, and neck to minimize potential injuries.

### DESIGN & MATERIALS

- Anatomically shaped main structure made of slatted wood.
- Polyester fabrics resistant to liquids.
- X-ray translucent.
- Includes head cushions and a storage/transport bag.
- Heavy polypropylene straps on the exterior, arranged continuously to function as a harness when securing the patient.

### STRAPS

3 frontal straps with color coding

2 groin straps

2 head straps



QR: Use your camera or bar code scanner and download the digital PDF version



## Lateral head immobilizer

Element used together with the spine board during assistance tasks.

### USES:

Prevents lateral head movement, avoiding the worsening of cervical injuries in the patient.

### DESIGN AND MATERIALS

Polypropylene straps and acetal buckles designed to secure the device to the spine board and regulate pressure on the head.

Polyester covers with coated fabric and side zippers.

Foamed polyurethane padding.



QR: Use your camera or bar code scanner and download the digital PDF version



# Multi-size flat cervical collar

Main component for reducing the probability of cervical spinal cord injuries.

## USES:

Reduces the likelihood of cervical spinal cord injury in trauma patients.

Its placement is the first step to be performed before beginning rescue operations.

## DESIGN & MATERIALS

Adjustment system that allows adaptation to different sizes.

Opening for tracheal access and carotid pulse monitoring.







# Multi-size pediatric cervical collar



QR: Use your camera or bar code scanner and download the digital PDF version

Main component for reducing the probability of cervical spinal cord injuries.

## USES:

Reduces the probability of cervical spinal cord injury in pediatric trauma patients.


Its placement is the first step to be performed before beginning rescue operations.

## DESIGN & MATERIALS:

Adjustment system that allows adaptation to different sizes.

Opening for tracheal access and carotid pulse monitoring.



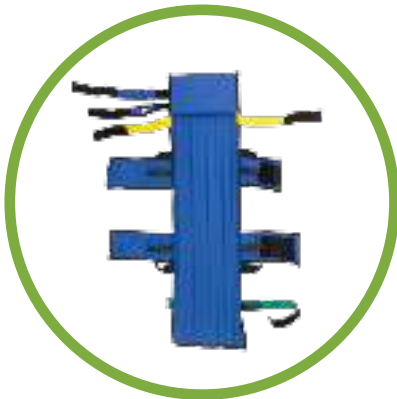

## Pediatric immobilizer



QR: Use your camera or bar code scanner and download the digital PDF version

Integral system that provides full-body immobilization for pediatric patients.

### USES:

- Provides total immobilization of the entire body of the pediatric patient.
- Facilitates transport and ensures patient safety.

### DESIGN AND MATERIALS

- Ergonomic design adapted for pediatric patients.
- Combines in a single product a spine board, spider straps, and lateral head immobilizers.
- Removable polyester-coated exterior for easy cleaning.
- Five handles to facilitate transport.
- Four restraint straps to immobilize the patient.
- Two removable lateral head immobilizers (included), with polyurethane padding.
- Patients should only have the cervical collar placed before positioning them on the immobilizer.

### MEASUREMENTS

| Total weight | Length   |
|--------------|----------|
| 4 kg.        | 1200 mm. |



# Pediatric kendrick extrication device



QR: Use your camera or bar code scanner and download the digital PDF version

The pediatric extrication vest has the same functional and operational characteristics as the adult version.

### USES:

- Adapted for the extrication of pediatric patients in confined spaces and vehicle interiors.
- Designed according to the morphology of smaller body frames.
- Provides maximum support to the spine, neck, and head during extrication, restricting movement together with the torso to minimize potential injuries.

### DESIGN & MATERIALS

- Anatomically shaped main structure made of slatted wood.
- Polyester fabrics resistant to liquids.
- X-ray translucent.
- Includes head cushions and a storage/transport bag.
- Heavy polypropylene straps on the exterior, arranged continuously to function as a harness when securing the patient.
- Three textile handles for patient transport.

### STRAPS

3 frontal straps with color coding

2 groin straps

2 head straps





# Seat belt cutter

Personal-use tool for work at vehicular accident scenes.

## USES:

With a single movement, it safely cuts seatbelts, pant belts, and other jammed fabrics without the risk of puncturing or injuring the patient.



QR: Use your camera or bar code scanner and download the digital PDF version







Carrying bag



## Semi-rigid splint set 5 pieces with carrying bag.

### USES

Developed for the immobilization of upper and lower limbs.

### DESIGN AND MATERIALS

Set of 5 padded splints for extremities.

X-ray translucent.

Reusable and easy-to-clean surface.

Includes:

- Short boot splint (1 unit).
- Long boot splint (1 unit).
- Short straight splint (1 unit).
- Long straight splint (1 unit).

### ACCESSORIES

Includes carrying bag.



QR: Use your camera or bar code scanner and download the digital PDF version



Spider placed  
on Tabla Raquis

## Spider harness

Complementary component for spinal boards.

### USES:

Allows immobilizing the patient during transport, securing the shoulder, chest, abdomen, hip, and leg areas.

Enables adjustment of the distance between anchor points and proper fit over the body.

Can be used with any type of spine board and with basket-type rescue stretchers.

### DESIGN AND MATERIALS

Placement and color coding.

Six color-differentiated anchors for easy placement and error-free adjustment.

Straps made of heavy polypropylene with acetal buckles.

X-ray translucent components that allow imaging diagnostics without removing the immobilization elements.



QR: Use your camera or bar code scanner and download the digital PDF version



QR: Use your camera or bar code scanner and download the digital PDF version

# Vacuum mattress

Indicated for patients with suspected spinal injury who require a specific position.

## USES:

Prescribed for patients with apparent spinal injury who require transport in a defined posture, in confined or aquatic environments.

Full-body immobilization.

Thermal, mechanical, and electrical insulation.

Immobilization of psychiatric patients during transport.

## DESIGN & MATERIALS

Facilitates positioning of the body, limb, or a specific anatomical area.

Contains no rigid components that could damage an aircraft during potential air transport.

Occupies minimal space once stored.



TRANSPORT BAG



SIDE HANDLES



VACUUM PUMP





Vacuum pump



Carrying bag

# Vacuum splint set

## 3 pieces with carry bag and vacuum pump.



QR: Use your camera or bar code scanner and download the digital PDF version

### USES

- Allows the injured limb to be enclosed in its current position, molding the splint around it.
- Once positioned, the vacuum pump removes the air and the microbeads compact, rigidizing the splint without compressing the injured limb.

### DESIGN & MATERIALS

- Three different sizes identified by color, to adapt to various extremities and patient ages.
- PVC with high-tenacity polyester mesh.
- X-ray translucent, waterproof, and washable.
- Filled with compactable pearl microbeads.
- Filter on inflation and vacuum valves to prevent microbead loss.

### ACCESSORIES

- Vacuum pump and transport bag.
- A full-body vacuum mattress can also be manufactured for total patient immobilization, compatible with spine boards or rescue basket stretchers.





## INFOREST SRL

☎ +54 (0) 3547-430529/406693  
✉ [ventas@inforest.com.ar](mailto:ventas@inforest.com.ar)  
✉ [comex@inforest.com.ar](mailto:comex@inforest.com.ar)  
🌐 [www.inforest.com.ar](http://www.inforest.com.ar)  
📷 @inforest\_incendiosforestales  
f Inforest

## INFOREST IBÉRICA

☎ +34 681 314646  
✉ [info@inforestiberica.com](mailto:info@inforestiberica.com)  
🌐 [www.inforestiberica.com](http://www.inforestiberica.com)  
📷 @inforestiberica  
f Inforest

## INFOREST AEGEAN

✉ [info@inforestaegean.com](mailto:info@inforestaegean.com)  
🌐 [www.inforestiberica.com](http://www.inforestiberica.com)