



DATA SHEET

QR: Use your camera or bar code scanner and download the digital PDF version




WILDFIRE

WICK® 100-4H

ULTRA-LIGHTWEIGHT, HIGH-PERFORMANCE FIRE PUMP

- | Powered by a reliable 4-stroke, 50 cc Honda engine, the WICK® 100-4H has the best performance of all pumps in its class.
- | Integral fuel tank.
- | Coupled to a bolt on detachable, single-stage foam-compatible pump.
- | Unique clutch feature for easy starting and water conservation.
- | Single-stage, detachable pump end for easy maintenance.
- | Meets the emission standards of US EPA/CARB regulations.
- | Optional transportable back pack.
- | Optional base-mounted hand primer assembly

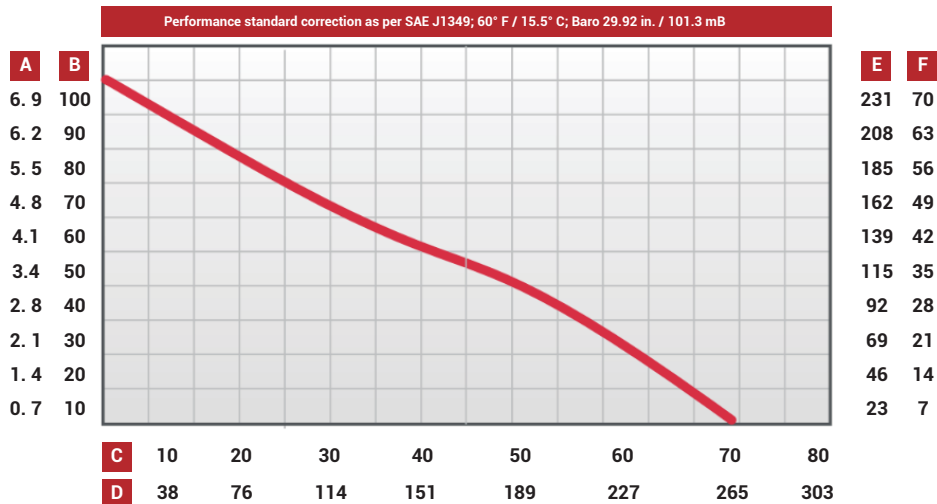

WEIGHT & DIMENSIONS			ENGINE	
Length	14.0"	36 cm	Honda GXH50 Clutch Drive	4-stroke; 50 cc; 2.5* 2.5* gros Hp @ 7000 RPM
Width	11.0"	28 cm	Fuel Tank Capacity	0.81 qt. US / 0.77 L
Height	16.0"	41 cm	Oil Capacity	.26 qt. US / 0.25 L
Weight	20.2 lbs	9.16 kg	* Net power output is 2.1 Hp @ 7000 RPM. Mass production engines may vary from this value. Specifications subject to change without notice.	
Suction	1.5" NPSH	38 mm		
Discharge	1.5" NPSH	38 mm		

A Pressure in Bar B Pressure in PSI C Flow U.S. GPM D Flow liters / Min. E Head Press. Feet F Head Press. Meters

WWW.INFOREST.COM.AR
ventas@inforest.com.ar
comex@inforest.com.ar

WICK® 100-4H

DETAILS

BID SPECIFICATION

- | The portable fire pump must have a Honda model GX50, 4-stroke, 50cc engine.
- | The pump must have minimum flow and pressures as shown in the performance chart.
- | The pump must come standard with a centrifugal clutch.
- | The pump must meet the emission standards of US EPA/CARB regulations.
- | The pump must have a detachable (bolt-on) foam-compatible single-stage pump end.
- | The pump must be available with a transportable back pack.
- | The pump must have an integral fuel tank that provides approximately 40 minutes run time.
- | The pump must be available with a base-mounted hand primer.
- | The pump must be equipped with an electronic ignition
- | The pump must not weigh more than 20.2 lbs / 9.16 kg.



WICK® 100-4H

Part#		Description
A	71WICK100-4HA	WICK® 100-4H Fire Pump
A1	71WICK100-4HA	WICK® 100-4H Fire Pump (with optional 71W104-PRIMEKIT hand primer)



OPTIONAL

Part#		Description
A	71W104-HPACK	Back Board with padded carrying straps
B1	70FLHPPQC	Hand Primer QC
B2	70FLHPPPS	Hand Primer NPSH
B2	70FLHPPNH	Hand Primer NH
B3	71W104-PRIMEKIT	Hand Primer kit for WICK® 100-4H
C1	70FL15TPPS	Thread protector 1 1/2" / 38 mm
C2	6124NM24PF	Adaptor .. 1 1/2" / 38 mm NH Male x 1 1/2" / 38 mm NPSH Female
D	70FL15DLPS10	Draftlite HP suction hose .. 1 1/2"/38 mm x 10'/3M c/w NPSH
E	70FLFV15PF	Foot Valve / Strainer (Alum) 1 1/2"/38 mm Female NPSH